

08-18-00

A

Docket Number	CLV-20676F
FILING BY "EXPRESS MAIL" UNDER 37 CFR 1.10	

EL634875472US
Express Mail Label Number

August 17, 2000
Date of Deposit

JC901 U.S. PTO
09/640526
08/17/00

Address to: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

UTILITY PATENT APPLICATION TRANSMITTAL AND FEE SHEET

Transmitted herewith for filing under 37 CFR §1.53(b)(1) is a **continuation** of prior Application No. 09/262,542, filed March 4, 1999, which is a continuation of Serial No. 09/108,714, filed July 1, 1998, which is a divisional of application Serial No. 08/682,452, filed July 17, 1996, which is a divisional of application Serial No. 08/569,816 filed December 8, 1995.

Applicant (or identifier): NICOLSON ET AL.

Title: EXTENDED WEAR OPHTHALMIC LENS

Enclosed are:

1. ☒ Specification (Including Claims and Abstract) - 135 pages
2. ☐ Drawings - sheets
3. ☐ Declaration and Power of Attorney
 - a. ☐ Newly executed (original or copy)
 - b. ☒ Copy from a prior application (signed or with indication that original was signed)
 - i. ☐ Deletion of Inventors
Signed statement attached deleting inventor(s) named in the prior application
4. ☒ Incorporation By Reference
The entire disclosure of the prior application, from which a copy of the Declaration and Power of Attorney is supplied under Box 3b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
5. ☐ Microfiche Computer Program (appendix)
6. ☐ Nucleotide and/or Amino Acid Sequence Submission
 - ☐ Computer Readable Copy
 - ☐ Paper Copy
 - ☐ Statement Verifying Identity of Above Copies
7. ☒ Preliminary Amendment
8. ☐ Assignment Papers (Cover Sheet & Document(s))
9. ☐ English Translation of
10. ☐ Information Disclosure Statement
11. ☐ Certified Copy of Priority Document(s)
12. ☒ Return Receipt Postcard
13. ☐ Other:

- ☒ The right to elect an invention or species that is different from that elected in parent Application No. Application No. 09/262,542, filed March 4, 1999, which is a continuation of Serial No. 09/108,714, filed July 1, 1998, which is a divisional of application Serial No. 08/682,452, filed July 17, 1996, which is a divisional of application Serial No. 08/569,816 filed December 8, 1995 in the event of a restriction or election of species requirement that is identical or substantially similar to that made in said parent application is hereby reserved.

Filing fee calculation:

- ☒ Before calculating the filing fee, please enter the enclosed Preliminary Amendment.
☒ Before calculating the filing fee, please cancel claims 2-158.

Basic Filing Fee							\$	690
Multiple Dependent Claim Fee (\$ 260)							\$	
Foreign Language Surcharge (\$ 130)							\$	
	For	Number Filed		Number Extra		Rate		
Extra Claims	Total Claims	24	-20	4	x	\$ 18	=	\$ 72
	Independent Claims	4	-3	1	x	\$ 78	=	\$ 78
TOTAL FILING FEE							\$	840


- ☒ Please charge Deposit Account No. 19-0134 in the name of Novartis Corporation in the amount of \$840. An additional copy of this paper is enclosed. The Commissioner is hereby authorized to charge any additional fees under 37 CFR §1.16 and §1.17 which may be required in connection with this application, or credit any overpayment, to Deposit Account No. 19-0134 in the name of Novartis Corporation.

Please address all correspondence to the address associated with Customer No. 001095, which is currently:

Thomas Hoxie
Novartis Corporation
Patent and Trademark Dept.
564 Morris Avenue
Summit, NJ 07901-1027

Please direct all telephone calls to the undersigned at the number given below and all telefaxes to (678) 415-3068.

Respectfully submitted,

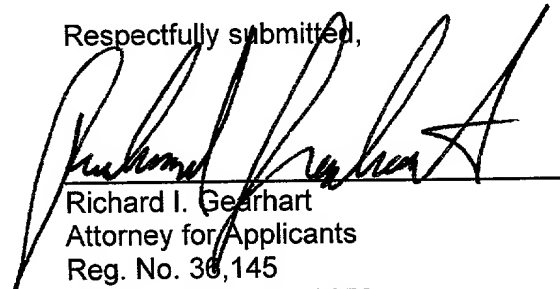
Richard I. Gearhart
Attorney for Applicants
Reg. No. 36,145
Tel. No. (678) 415-3650

Date: August 17, 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Paul NICOLSON, et al.

Group Art Unit:

Serial No:

Examiner:

Filed:

For: EXTENDED WEAR OPHTHALMIC LENS

PRELIMINARY AMENDMENT

Sir:

Please amend the specification as follows:

At page 1, after the title and "This Application is", please insert -- a continuation of Serial No. 09/262,542, filed on March 4, 1999, which is a continuation of Serial No. 09/108,714, filed July 1, 1998, which is a divisional of application Ser. No. 08/682,452, filed July 17, 1996, which is a divisional of application Ser. No. 08/569,816, filed December 8, 1995, which is --.

IN THE CLAIMS:

Please cancel claims **2-158**, before calculation of fees and without prejudice to further prosecution.

Please add new claims **183-206** as follows:

183. A method for producing an extended wear contact lens, said contact lens comprising a core polymeric material which has a high oxygen permeability and a high ion or water permeability, which method comprises the steps of:

- a) preparing a lens formulation comprising an oxypm polymerizable material selected from the group consisting of fluorine-containing macromers and fluorine-containing monomers, and an ionperm polymerizable material selected from the group consisting of acrylates, methacrylates, polyalkylene glycols and N-vinyl pyrrolidones, wherein said oxypm polymerizable material comprises between about 30% to about 70%, based on the total weight, of said lens formulation;
- b) placing said lens formulation in a lens mold;
- c) polymerizing- said lens formulation in said mold to form a lens core material having inner and outer surfaces such that said oxypm polymerizable material and said ionperm polymerizable material of said lens formulation form separate oxypm and ionperm phases; said lens core material having an oxygen permeability equal to or greater than 77 barrers;
- d) removing said lens core material from said lens mold;
- e) subjecting said lens core material to a treatment to modify said surfaces of said lens core material, wherein the surface treatment makes said surfaces more biocompatible with the ocular tissue and ocular fluids than said core material alone; and

- f) hydrating the treated lens core material to produce a hydrated extended wear contact lens,

wherein the modified surfaces of said lens in conjunction with the high oxygen and ion permeabilities of said core polymeric material allows said hydrated lens to be worn as extended wear lens that is worn for a continuous period of at least 24 hours with corneal swelling of less than about 8%.

184. The method of claim 183 wherein the surface modification treatment is selected from the group consisting of coating processes, grafting processes, plasma treating processes, electrical charge treating processes and irradiation processes.

185. The method of claim 183 wherein the surface modification treatment is a plasma treating process.

186. The method of claim 185 wherein said oxyperm polymerizable material is a fluorine-containing macromer and said ionoperm polymerizable material is N-vinyl pyrrolidone.

187. An extended wear contact lens comprising a core polymeric material and upper and lower surfaces, said core polymeric material comprising a silicone copolymer which provides a high ion permeability and a high oxygen permeability; wherein said silicone copolymer comprises an oxyperm polymerizable material selected from the group consisting of fluorine-containing macromers and fluorine-containing monomers, and an

ionoperm polymerizable material selected from the group consisting of acrylates, methacrylates, polyalkylene glycols and N-vinyl pyrrolidones; said core polymeric material having an oxygen permeability equal to or greater than 77 barrers; wherein said surfaces are hydrophilically modified by a treatment process selected from the group consisting of coating processes, grafting processes, plasma treating processes, electrical charge treating processes and irradiation processes; and wherein said extended wear contact lens can be continuously worn for at least four days on a human eye without substantial corneal swelling.

188. The extended contact lens of claim 187 wherein said core polymeric material comprises a fluorine containing macromer, and N-vinyl pyrrolidone.

189. The extended contact lens of claim 188 wherein said surfaces are modified by a plasma treating process.

190. The extended contact lens of claim 189 wherein said extended lens can be continuously worn for about 7 days with less than about 8% corneal swelling.

191. The extended contact lens of claim 187 wherein said wended lens is worn for about 30 days.

192. A hydrogel contact lens having modified surfaces, said hydrogel contact lens comprising a core polymeric material having an oxygen permeability equal to or greater

than 77 barrers, said hydrogel contact lens being suited to make contact with ocular tissue and ocular fluids and having a high oxygen permeability and a high ion permeability, said core polymeric material having formed from polymerizable materials comprising:

(a) an oxyperm polymerizable material selected from the group consisting of fluorine-containing macromers and fluorine-containing monomers, and

(b) an ionoperm polymerizable material selected from the group consisting of acrylates, methacrylates, polyalkylene glycols and N-vinyl pyrrolidones,

wherein said lens has a high oxygen permeability and allows ion or water permeation in an amount sufficient to enable the lens to move on the eye such that corneal health is not substantially harmed and wearer comfort is acceptable during a period of continuous contact with ocular tissue and ocular fluids, wherein said lens has an oxygen permeability of at least about 77 barrers and an ion permeability characterized either by an Ionoflux Ion Diffusion Coefficient of greater than about $6.4 \times 10^{-6} \text{ mm}^2/\text{sec}$ or an Ionoton Ion Permeability Coefficient of greater than about $0.4 \times 10^{-6} \text{ cm}^2/\text{min}$,

wherein said modified surfaces are hydrophilically modified surfaces that are modified by a treatment process selected from the group consisting of coating processes, grafting processes, plasma treating processes, electrical charge treating processes and irradiation processes,

wherein said hydrogel contact lens is adapted for at least 24 hours of continuous wear on a human eye without substantial corneal swelling.

193. The hydrogel contact lens of claim 192 wherein said core polymeric material comprises a fluorine containing macromer as said oxyperm material and N-vinyl pyrrolidone as said ionoperm material.

194. The hydrogel contact lens of claim 193 wherein said surfaces are modified by a plasma treating process.

195. The hydrogel contact lens of claim 194 wherein said lens can be worn for about 7 days with less than about 8% corneal swelling.

196. The hydrogel contact lens of claim 194 wherein said lens is worn for about 7 days with less than about 4% corneal swelling.

197. The hydrogel contact lens of claim 194 wherein said lens can be continuously worn for about 30 days.

198. The hydrogel contact lens of claim 194 wherein said lens has an oxygen permeability of at least about 81 barrers.

199. A method of using a contact lens as an extended wear lens, said lens having ophthalmically compatible modified surfaces, said lens being suited to extended periods of wear in continuous, intimate contact with ocular tissue and ocular fluids, said lens comprising a polymeric material which has a high oxygen permeability and a high ion or

water permeability, and which has an oxygen permeability equal to or greater than 77 barrers, said polymeric material being formed from polymerizable materials comprising:

(a) an oxyperm polymerizable material selected from the group consisting of fluorine-containing macromers and fluorine-containing monomers, and

(b) an ionoperm polymerizable material selected from the group consisting of acrylates, methacrylates, polyalkylene glycols and N-vinyl pyrrolidones,

wherein said modified surfaces are modified by a treatment process selected from the group consisting of coating processes, grafting processes, plasma treating processes, electrical charge treating processes and irradiation processes;

wherein said lens allows oxygen permeation in an amount sufficient to maintain corneal health and wearer comfort during a period of extended, continuous contact with ocular tissue and ocular fluids;

wherein said lens allows ion or water permeation in an amount sufficient to enable the lens to move on the eye such that corneal health is not substantially harmed and wearer comfort is acceptable during a period of extended, continuous contact with ocular tissue and ocular fluids; and

wherein said ophthalmic lens has an oxygen permeability of at least about 70 barrers and an ion permeability characterized either by (1) an Ionoton Ion Permeability Coefficient of greater than about $0.4 \times 10^{-6} \text{ cm}^2/\text{sec}$ or (2) an Ionoflux Diffusion Coefficient of greater than about $6.4 \times 10^{-6} \text{ mm}^2/\text{min}$, wherein said ion permeability is measured with respect to sodium ions;

said method comprising the steps of:

(a) applying said lens to the ocular environment. and

(b) allowing said lens to remain in intimate contact with the ocular environment for a period of at least 24 hours.

200. The method of claim 199 wherein said lens has an oxygen permeability of at least about 81 barrers.

201. The method of claim 199 wherein said intimate contact period is at least 4 days.

202. The method of claim 199 wherein said intimate contact period is about 7 days.

203. The method of claim 199 wherein said intimate contact period is about 14 days.

204. The method of claim 199 wherein said intimate contact period is about 30 days.

205. The method of claim 199, wherein said lens produces, after wear of about 24 hours, including normal steep periods, less than about 8% corneal swelling.


206. The method of claim 199, wherein said lens produces, after wear of about 7 days, including normal sleep periods, less than about 6% corneal swelling.

Please address all correspondence to Thomas Hoxie, Novartis Corporation, Patent & Trademark Department, 564 Morris Ave., Summit, NJ 0790-1027. The Commissioner is hereby authorized to charge any other fees which may be required under 37 C.F.R. §§1.16 and 1.17, or credit any overpayment, to Deposit Account No. 19-0134.

Respectfully submitted,

Date:

8/16/00

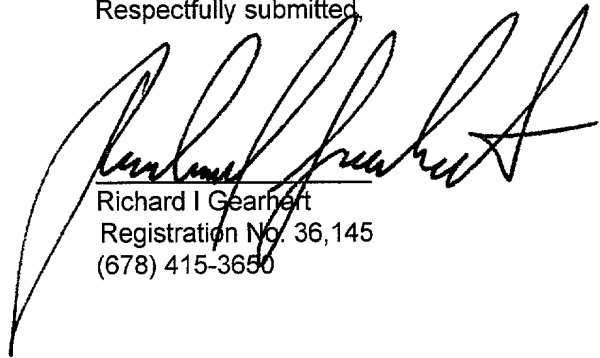

Richard I. Gearhart
Registration No. 36,145
(678) 415-3650

Novartis Corporation
Patent & Trademark Department
564 Morris Ave.
Summit, NJ 07901-1027

EXTENDED WEAR OPHTHALMIC LENS

This application is a continuation-in-part of U.S. Application No. 08/301,166, filed on September 6, 1994. Priority is also claimed under 35 U.S.C. 119 for German Application No. 95810221.2 filed on April 4, 1995 and Swiss Application No. 1496/95 filed on May 19, 1995.

BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

This invention relates broadly to lenses and polymeric materials useful in optic and ophthalmic arts. More specifically, this invention relates to polymeric materials and treatment processes useful in the manufacture of contact lenses. Still more specifically, this invention relates to contact lenses useful as extended-wear contact lenses.

2. DESCRIPTION OF THE RELATED ART

A wide variety of research has been conducted in the field of biocompatible polymers. The definition of the term "biocompatible" depends on the particular application for which the polymer is designed. In the field of ophthalmic lenses, and in particular in the field of contact lenses, a biocompatible lens may be generally defined as one which will not substantially damage the surrounding ocular tissue and ocular fluid during the time period of contact. The phrase "ophthalmically compatible" more appropriately describes the biocompatibility requirements of ophthalmic lenses.

One ophthalmic compatibility requirement for contact lenses is that the lens must allow oxygen to reach the cornea in an amount which is sufficient for long-term corneal health. The contact lens must allow oxygen from the surrounding air to reach the cornea because the cornea does not receive oxygen from the blood supply like other tissue. If sufficient oxygen does not reach the cornea, corneal swelling occurs. Extended periods of oxygen deprivation causes the undesirable growth of blood vessels in the cornea. "Soft" contact lenses conform closely to the shape of the eye, so oxygen cannot easily circumvent the lens. Thus, soft contact lenses must allow oxygen to diffuse through the lens to reach the cornea.

Another ophthalmic compatibility requirement for soft contact lenses is that the lens must not strongly adhere to the eye. Clearly, the consumer must be able to easily remove the lens

from the eye for disinfecting, cleaning, or disposal. However, the lens must also be able to move on the eye in order to encourage tear flow between the lens and the eye. Tear flow between the lens and eye allows for debris, such as foreign particulates or dead epithelial cells, to be swept from beneath the lens and, ultimately, out of the tear fluid. Thus, a contact lens must not adhere to the eye so strongly that adequate movement of the lens on the eye is inhibited.

While there exist rigid gas permeable ("RGP") contact lenses which have high oxygen permeability and which move on the eye, RGP lenses are typically quite uncomfortable for the consumer. Thus, soft contact lenses are preferred by many consumers because of comfort. Moreover, a contact lens which may be continuously worn for a period of a day or more (including wear during periods of sleeping) requires comfort levels which exclude RGP lenses as popular extended-wear candidates.

In order to balance the ophthalmic compatibility and consumer comfort requirements in designing a daily wear soft contact lens, polymers and copolymers of 2-hydroxyethyl methacrylate (HEMA) were developed. These hydrophilic polymers move well on the eye and provide sufficient oxygen permeability for daily wear. Certain soft contact lenses have been approved by the FDA for extended wear periods of up to about 6 nights of overnight wear and seven days of daily wear. However, the consumer cannot safely and comfortably wear these poly(HEMA) lenses for extended periods of seven days or more, because the oxygen permeability is insufficient. True extended wear (i.e., seven days or more) of these lenses may result, at a minimum, in corneal swelling and development of surface blood vessels in the cornea.

In order to improve oxygen permeability, polymers containing silicone groups were developed. A variety of siloxane-containing polymers have been disclosed as having high oxygen permeability. For example, see U.S. Patent Nos. 3,228,741; 3,341,490; 3,996,187; and 3,996,189. However, polysiloxanes are typically highly lipophilic. The properties (e.g., lipophilicity, glass transition temperature, mechanical properties) of known polysiloxanes has resulted in contact lenses which adhere to the eye, inhibiting the necessary lens movement. In addition, polysiloxane lipophilicity promotes adhesion to the lens of lipids and proteins in the tear fluid, causing a haze which interferes with vision through the lens.

There have been attempts to blend the desirable hydrophilic properties of hydrophilic polymers, formed from monomers such as HEMA, with the desirable oxygen permeability of polymers formed from siloxane-containing monomers. For example, see U.S. Patent Nos. 3,808,178; 4,136,250; and 5,070,169. However, prior attempts at producing a true extended

wear contact lens have been unsuccessful, either because of the effect of the extended-wear lens on corneal health or because the lens would not move on the eye. Thus, there remains a need for an ophthalmically compatible, transparent polymeric material which is suited to extended periods of continuous contact with ocular tissue and tear fluid.

5

OBJECTS AND SUMMARY OF THE INVENTION

An object of the invention is to provide a material having a balance of oxygen permeability, ion permeability, on-eye movement and tear exchange, all of which are sufficient for corneal health and wearer comfort during extended periods of continuous wear.

10

Another object of the invention is to provide an ophthalmic lens capable of extended continuous wear periods of at least 24 hours without substantial adverse impact on ocular health or consumer comfort, and more preferably, to provide a lens capable of continuous wear of 4 to 30 days or more without substantial adverse impact on ocular health or consumer comfort.

15

A further object of the invention is to provide an ophthalmic lens capable of extended continuous wear periods of at least 24 hours without substantial corneal swelling or consumer discomfort, and more preferably, to provide a lens capable of continuous wear of 4, 7, 14 or 30 days or more without substantial corneal swelling or consumer discomfort.

20

Yet another object of the invention is to provide methods of forming an extended-wear ophthalmic lens.

25

Still a further object of the invention is to provide methods of testing and classifying ophthalmic lenses as candidates for true extended-wear.

These and other objects of the invention are met by the various embodiments described herein.

30

One embodiment of the invention is an ophthalmic lens, suited to extended periods of wear in continuous, intimate contact with ocular tissue and tear fluid. The lens displays a balance of oxygen permeability and ion permeability sufficient to maintain good corneal health, adequate movement of the lens on the eye and wearer comfort during extended wear periods. The lens is formed by polymerization, preferably copolymerization, of (a) at least one oxypem

35

polymerizable material which is capable of polymerizing to form a polymer having a high oxygen permeability; and (b) at least one ionoperm polymerizable material which is capable of polymerizing to form a polymer having a high ion permeability. Preferably, the lens includes a core polymeric material and ophthalmically compatible surfaces. In a preferred embodiment, the surface is more hydrophilic and lipophobic than the core polymeric material.

Another embodiment of the invention is a method of forming an ophthalmic lens having high oxygen permeability and high ion permeability. The method includes the step of forming a core material, having an inner surface and an outer surface, such that at least one pathway for ion transport and at least one pathway for oxygen transport are present from the inner to the outer surface. In a preferred embodiment, the method includes treating the surface of the lens to render the surface more hydrophilic than the core.

A further embodiment of the invention is an ophthalmic lens comprising a polymeric material which has a high oxygen permeability and a high ion or water permeability, the polymeric material being formed from at least one polymerizable material including (a) at least one oxyperm segment and (b) at least one ionoperm segment. The lens displays a balance of oxygen permeability and ion permeability sufficient to maintain good corneal health, adequate movement of the lens on the eye and wearer comfort during extended wear periods.

Yet another embodiment of the invention is a method of using a contact lens having both an oxygen transmission pathway and an ion transmission pathway from inner to outer surface as an extended wear lens. The method includes (a) applying the lens to the ocular environment and (b) allowing the lens to remain in intimate contact with the ocular environment for a period of at least 24 hours without substantial adverse impact on corneal health or wearer comfort. A preferred method includes additional steps of (c) removing the lens from the ocular environment; (d) disinfecting the lens; (e) applying the lens to the ocular environment; and (f) allowing the lens to remain in intimate contact with the ocular environment for a period of at least an additional 24 hours. In a preferred embodiment, the lens is worn for a continuous period of at least seven days without substantial adverse impact on corneal health or wearer comfort.

OUTLINE OF DESCRIPTION OF THE PREFERRED EMBODIMENTS

I. DEFINITION OF TERMS

II. CORE POLYMER AND LENS

- A. Oxyperm polymerizable materials
- B. Ionoperm polymerizable materials
- C. Weight ratio of oxyperm to ionoperm polymerizable materials
- D. Morphology
- E. Bulk Water Content
- F. Ion and Water Permeability
 - 1. Ionoflux Ion Permeability Measurements
 - 2. Ionoton Ion Permeability Measurements
 - 3. Hydrodell Water Permeability Measurements
- G. Oxygen Permeability and Transmissibility
- H. Mechanical On-eye Movement Parameters
 - 1. Tensile Modulus and Short Relaxation Time
 - 2. Tangent Delta
 - 3. Parameter Combinations
- I. Examples of suitable materials
 - 1. Material "A"
 - 2. Material "B"
 - 3. Material "C"
 - 4. Material "D"

III. OPHTHALMICALLY COMPATIBLE SURFACES

IV. UTILITY

- A. Ophthalmic lenses
- B. Contact lenses

V. METHODS OF USE AS EXTENDED-WEAR LENSES

VI. METHODS OF MANUFACTURE OF LENSES

DESCRIPTION OF THE PREFERRED EMBODIMENTS

One embodiment of the present invention is an ophthalmically compatible, transparent lens suited to extended periods of continuous contact with ocular tissue and tear fluids. A particularly preferred embodiment of the invention is an extended-wear vision correction lens suited for safe and comfortable long term wear without removal. In order to properly describe the invention and to delineate the metes and bounds of the claims, a set of basic terms will be defined at the outset.

I. DEFINITION OF TERMS

An “ophthalmic lens”, as used herein, refers to lenses which are placed in intimate contact with the eye or tear fluid, such as contact lenses for vision correction (e.g., spherical, toric, bifocal), contact lenses for modification of eye color, ophthalmic drug delivery devices, ocular tissue protective devices (e.g., ophthalmic healing promoting lenses), and the like. A particularly preferred ophthalmic lens is an extended-wear contact lens, especially extended-wear contact lenses for vision correction.

A “polymerizable material which is capable of polymerizing to form a polymer having a high oxygen permeability”, as used herein, refers to monomers, oligomers, macromers, and the like, and mixtures thereof, which are capable of polymerizing with like or unlike polymerizable materials to form a polymer which displays a relatively high rate of oxygen diffusion therethrough. For convenience of reference, these materials will be referred to herein as “oxyperm polymerizable materials” and the resultant polymers will be referred to herein as “oxyperm polymers”.

The "oxygen transmissibility" of a lens, as used herein, is the rate at which oxygen will pass through a specific ophthalmic lens. Oxygen transmissibility, Dk/t , is conventionally expressed in units of barrers/mm, where t is the average thickness of the material [in units of mm] over the area being measured and "barrer" is defined as:

$$[(\text{cm}^3 \text{ oxygen})(\text{mm}) / (\text{cm}^2)(\text{sec})(\text{mm Hg})] \times 10^{-9}$$

The "oxygen permeability", Dk , of a lens material does not depend on lens thickness. Oxygen permeability is the rate at which oxygen will pass through a material. Oxygen permeability is conventionally expressed in units of barrers, where "barrer" is defined as:

$$[(\text{cm}^3 \text{ oxygen})(\text{mm}) / (\text{cm}^2)(\text{sec})(\text{mm Hg})] \times 10^{-10}$$

These are the units commonly used in the art. Thus, in order to be consistent with the use in the art, the unit "barrer" will have the meanings as defined above. For example, a lens having a Dk of 90 barrers ("oxygen permeability barrers") and a thickness of 90 microns (0.090 mm) would have a Dk/t of 100 barrers/mm ("oxygen transmissibility barrers"/mm).

A "polymerizable material which is capable of polymerizing to form a polymer having a high ion permeability", as used herein, refers to monomers, oligomers, macromers, and the like, and mixtures thereof, which are capable of polymerizing with like or unlike polymerizable materials to form a polymer which displays a relatively high rate of ion or water permeation therethrough. For convenience of reference, these materials will be referred to herein as "ionoperm polymerizable materials" and the resultant polymers will be referred to herein as "ionoperm polymers".

A "macromer", as used herein, refers to a polymerizable material which has a molecular weight of at least about 800 grams/mol. The term "macromer", as used herein, also encompasses oligomers.

A "monomer", as used herein refers to a polymerizable material which has a molecular weight of less than about 800 grams/mol.

A "phase", as used herein, refers to a region of substantially uniform composition which is a distinct and physically separate portion of a heterogeneous polymeric material. However, the term "phase" does not imply that the material described is a chemically pure substance, but merely that certain bulk properties differ significantly from the properties of another phase within the material. Thus, with respect to the polymeric components of a lens, an ionoperm phase refers to a region composed of essentially only ionoperm polymer (and water, when

hydrated), while an oxyperm phase refers to a region composed of essentially only oxyperm polymer.

5 A "continuous phase", as used herein, refers to a region of substantially uniform composition which forms a continuous pathway from one surface of an article to another surface of an article.

10 "Co-continuous phases", as used herein, refers to at least two regions, each of substantially uniform composition which differs from the other, and each of which forms a continuous pathway from one surface of an article to another surface of an article. Thus, an ophthalmic lens having co-continuous phases of oxyperm polymer and ionoperm polymer will have two continuous pathways or sets of continuous pathways extending from the inner surface of the lens to the outer surface of the lens.

15 "Morphology", as used herein, refers to the structure and relationship of the phases of a material.

20 "Ophthalmically compatible", as used herein, refers to a material or surface of a material which may be in intimate contact with the ocular environment for an extended period of time without significantly damaging the ocular environment and without significant user discomfort. Thus, an ophthalmically compatible contact lens will not produce significant corneal swelling, will adequately move on the eye with blinking to promote adequate tear exchange, will not have substantial amounts of lipid adsorption, and will not cause substantial wearer discomfort during the prescribed period of wear.

25 "Ocular environment", as used herein, refers to ocular fluids (e.g., tear fluid) and ocular tissue (e.g., the cornea) which may come into intimate contact with a contact lens used for vision correction, drug delivery, wound healing, eye color modification, or other ophthalmic applications.

30 "Hydrophilic", as used herein, describes a material or portion thereof which will more readily associate with water than with lipids.

35 A "hydrophilic surface", as used herein, refers to a surface which is more hydrophilic and lipophobic than the bulk or core material of an article. Thus, an ophthalmic lens having a

hydrophilic surface describes a lens having a core material having a certain hydrophilicity surrounded, at least in part, by a surface which is more hydrophilic than the core.

The "outer surface" of a lens, as used herein, refers to the surface of the lens which faces away from the eye during wear. The outer surface, which is typically substantially convex, may also be referred to as the front curve of the lens. The "inner surface" of a lens, as used herein, refers to the surface of the lens which faces towards the eye during wear. The inner surface, which is typically substantially concave, may also be referred to as the base curve of the lens.

"TRIS", as used herein, refers to 3-methacryloxypropyltris(trimethylsiloxy) silane, which is represented by CAS No. 17096-07-0. The term "TRIS" also includes dimers of 3-methacryloxypropyltris(trimethylsiloxy) silane.

"Molecular weight" of a polymeric material (including monomeric or macromeric materials), as used herein, refers to the number-average molecular weight unless otherwise specifically noted or unless testing conditions indicate otherwise.

A. Oxyperm Polymerizable Materials

Oxyperm polymerizable materials include a wide range of materials which may be polymerized to form a polymer displaying a relatively high oxygen diffusion rate therethrough. In addition, these materials must be relatively ophthalmically compatible. These oxyperm polymerizable materials include, without limitation thereto, siloxane-containing macromers and monomers, fluorine-containing macromers and monomers, and carbon-carbon triple bond-containing macromers and monomers. The oxyperm macromer or monomer may also contain hydrophilic groups.

Preferred oxyperm polymers are those formed from a siloxane-containing macromer. Macromers having dialkyl siloxane groups, especially dimethyl siloxanes, are particularly preferred. These macromers are broadly referred to as poly(dimethyl siloxanes) (also, PDMS). The siloxane-containing macromer may also include hydrophilic groups. Examples of suitable siloxane-containing macromers include, without limitation thereto, the Materials A, B, C, and D as described herein.

The oxygen transmissibility (Dk/t) of the lens is preferably at least 70 barrers/mm, more preferably at least 75 barrers/mm, and most preferably at least 87 barrers/mm. The lens center

thickness is typically more than about 30 microns, preferably about 30 to about 200 microns, more preferably about 40 to about 150 microns, even more preferably about 50 to about 120 microns, and most preferably about 60 to about 100 microns.

5 The oxygen transmissibility of the extended-wear lens from the outer surface to the inner surface must be sufficient to prevent any substantial corneal swelling during the period of extended wear. It is known that the cornea swells approximately 3% to 4% during overnight periods of sleep when the eyelids are closed, as a result of oxygen deprivation. It is also known that wearing a typical contact lens, such as ACUVUE (Johnson & Johnson), for a period of about 10 8 hours (overnight wear) causes corneal swelling of about 11%. However, a preferred extended-wear contact lens will produce, after wear of about 24 hours, including normal sleep periods, corneal swelling of less than about 8%, more preferably less than about 6%, and most preferably less than about 4%. A preferred extended-wear contact lens will produce, after wear of about 7 days, including normal sleep periods, corneal swelling of less than about 10%, more preferably less than about 7%, and most preferably less than about 5%. Thus, the extended-wear lens must have oxypm polymer in an amount sufficient to produce oxygen diffusion pathways from the outer surface to the inner surface of the lens which are sufficient to yield the above properties relating to corneal swelling. Preferably, the extended-wear lens has a continuous phase of oxypm polymer extending from the outer surface to the inner surface of the lens.

15 B. Ionperm Polymerizable Materials

20 Ionperm polymerizable materials include a wide range of materials which may be polymerized to form a polymer displaying a relatively high ion diffusion rate therethrough. In addition, these materials must be relatively ophthalmically compatible. These ionperm 25 polymerizable materials include, without limitation thereto, acrylates and methacrylates, such as 2-hydroxyethyl methacrylate, acrylamide, methacrylamide, and dimethylacrylamide; poly(alkylene glycols), such as poly(ethylene glycol); N-vinyl pyrrolidones such as N-vinyl-2-pyrrolidone; and the like and mixtures thereof. Other ionperm materials are disclosed in the 30 specific embodiments of Materials A-D, described below.

35 C. Weight Ratios

 The ratios of oxypm to ionperm polymerizable materials may vary substantially, depending on the selected balance of oxygen permeability and ion permeability for the chosen end-use of the molded polymeric article. Preferably, the volumetric ratio of oxypm to

ionoperm material (including water) in the fully hydrated lens is about 40 to about 60 to about 60 to about 40. However, weight percentages, based on the total weight of the lens, will be defined because weight percentages are more conveniently utilized in lens fabrication. Preferably, the extended-wear contact lenses having substantially only ionoperm and oxyperm materials will have about 60 to about 85 weight percent oxyperm polymerizable material and about 15 to about 40 weight percent ionoperm polymerizable material in the prepolymerization mixture, based on total polymerizable material weight. More preferably, the prepolymerization mixture will contain about 70 to about 82 weight percent oxyperm polymerizable material and about 18 to about 30 weight percent ionoperm polymerizable material, based on total polymerizable material weight.

A wide variety of additional polymerizable materials may be included in the mixture prior to polymerization. Cross-linking agents, such as ethylene glycol dimethacrylate (EGDMA), may be added to improve structural integrity and mechanical strength. Antimicrobial polymerizable materials such as poly(quaternary ammonium) salts may be added to inhibit microbial growth on the lens material. Also, additional ionoperm monomers or macromers and oxyperm polymerizable materials may be added to adjust the oxygen permeability and ion permeability of the final molded article. An especially advantageous polymerizable material is TRIS, which may act both to increase oxygen permeability and to improve the modulus of elasticity.

A preferred prepolymerization mixture will include (a) about 30 to 60 weight percent oxyperm macromer, (b) about 20 to 40 weight percent ionoperm polymerizable material, and (c) about 1 to 35 weight percent TRIS, based on the total lens weight. More preferably, the amount of TRIS is about 10 to 33 weight percent, based on the total prepolymerization mixture weight.

In a preferred embodiment, the prepolymerization mixture includes less than about 5 weight percent cross-linking agent, based on the total prepolymerization mixture weight. More preferably, the prepolymerization mixture includes less than about 2 weight percent cross-linking agent, based on the total prepolymerization mixture weight. Even more preferably, the prepolymerization mixture includes substantially no cross-linking agent. In a particularly preferred embodiment, the prepolymerization mixture includes no added cross-linking agent.

The previously described ranges for oxyperm polymerizable materials, ionoperm polymerizable materials, and TRIS are offered to enable the reader to better comprehend the invention. However, it should be noted that the specific weight or volume percentages of

oxyperm and ionoperm polymerizable materials are not the most critical factors to consider in preparing a good extended-wear ophthalmic lens. More importantly, the lens must have sufficient ion-permeability for good on-eye movement and sufficient oxygen permeability for good corneal health during the extended wear period.

D. Morphology

One requirement of the lens material is that the lens allow a high visible light transmission from the outer to inner surface of the lens. A lens morphology which includes large phase separated regions will reduce visible light transmission and cause substantial undesirable image distortion, thereby destroying the value of the lens as a vision correction device. Thus, the lens must have a morphology which allows at least about 80%, more preferably about 90%, visible light transmission and does not produce any significant undesirable image distortion.

In one preferred embodiment, the lens material has at least two phases: the phases including at least one oxyperm phase and at least one ionoperm phase. While there may be two distinct phases, it is believed that there may be a transition phase, or interphase, in which the material composition and the material properties are a blend of those of the oxyperm and ionoperm materials. Thus, there may exist a distinct oxyperm phase or plurality of distinct oxyperm phases, a distinct ionoperm phase or a plurality of distinct ionoperm phases, and an amphipathic phase mixture or blend of oxyperm and ionoperm phases. In one preferred embodiment, the glass transition temperature (T_g) of the oxyperm phase is less than about -115° Celsius.

The existence of separate oxyperm and ionoperm phases, rather than a complete blend of oxyperm and ionoperm phases, is believed to be advantageous in promoting the diffusion of oxygen and ions. Oxygen will diffuse predominantly through the oxyperm polymer, while the ionoperm polymer provides a higher barrier to oxygen diffusion. Similarly, ions will diffuse well through the ionoperm polymer, but the oxyperm polymer provides a higher resistance to ion diffusion. Thus, one homogeneous oxyperm/ionoperm phase will provide undesirable resistance to both oxygen and ion diffusion, while two separate oxyperm and ionoperm phases will provide low resistance pathways for transmission of both oxygen and ions or water. Thus, the ideal extended-wear lens has a pathway or series of pathways from the outer surface to the inner surface for transmission of oxygen therethrough, and an analogous continuous pathway or series of pathways for transmission of water or ions therethrough. In a particularly preferred embodiment, the lens has two co-continuous phases, one an oxyperm phase and the other an

ionoperm phase, allowing for permeation of water or ions and oxygen between the front and base curves of the lens.

5 E. Bulk Water Content

The measurement of water content is difficult because the removal of adhered surface droplets, without affecting the bulk lens water content, is difficult. In addition, water may evaporate from the lens surface quickly, thereby lowering the water content from the equilibrium level. Accordingly, a discussion of the bulk water content of a lens warrants a discussion of the measurement technique used to determine the water content.

The preferred bulk water content of the hydrated lens will be a function of the lens material properties. The material properties are dependent on the prepolymerization macromers and monomers and polymerization conditions. Thus, the preferred water content for a lens including a fluorine-containing oxypem material may be different from that of a lens including a siloxane-containing oxypem material. Accordingly, while general ranges for bulk water content are offered for a better understanding of the invention, the invention is not generally limited to specific bulk water contents.

One method of measuring the water content of a lens formed in accordance with the present invention, referred to herein as the "Bulk Technique", is as follows. First the lens is thoroughly hydrated in a physiological saline solution, such that the water in the lens is in equilibrium with the surrounding water. Next the lens is gently blotted between two lint-free blotting cloths to remove surface moisture. The lens is quickly placed on an aluminum weighing pan and the first wet weight, W_1 , is measured. Next, the aluminum pan with lens is placed in an oven at 36°C for a period of at least 24 hours. After heat treating, the pan with lens is removed, placed in a desiccator, and allowed to cool to room temperature (about 22°C). The pan with lens is weighed again to determine the dry weight, W_d . The lens is re-equilibrated in physiological saline solution and a second wet weight W_2 is determined thereon. The wet weights (W_1 and W_2) are averaged to yield an average wet weight, W_w . The bulk water content is determined by the following equation:

$$\text{Percent water content} = (W_w - W_d) / W_w \times 100$$

A preferred lens bulk water content, determined by the "Bulk Technique", is less than about 32 weight percent. More preferably, the lens has a water content of about 10 to 30 weight

percent, based on the total lens weight. A particularly preferred lens water content is about 15 to about 25 weight percent.

F. Ion and Water Permeability

Unexpectedly, it has been determined that the ion permeability through the lens correlates well with on-eye movement. As discussed earlier, it is known that on-eye movement of the lens is required to ensure good tear exchange, and ultimately, to ensure good corneal health. While the invention is not bound by theory presented herein, it may be useful to discuss some theory for a better understanding of ways to practice the invention.

It is theorized that water permeability is an exceptionally important feature for an extended-wear lens which includes oxypem polymers such as those disclosed herein. Siloxane-containing oxypem materials tend to adhere strongly to the eye, thereby stopping on-eye movement. The ability to pass water through the lens is believed to allow a siloxane-containing polymeric lens to move on the eye, where the movement occurs via forces exerted by water being squeezed out of the lens. The water permeability of the lens is also believed important in replenishing lens water content once pressure is removed. Further, the permeability of ions is believed to be directly proportional to the permeability of water. Thus, ion permeability is a predictor of on-eye movement.

However, regardless of whether the water permeability theory is a correct understanding of the actual on-eye movement phenomenon, it has been unexpectedly found that above a certain threshold of ion permeability through a lens, from the inner surface of the lens to the outer, or vice versa, the lens will move on the eye, and below the threshold the lens will adhere to the eye. Thus, the present innovative extended-wear contact lenses provide a balance between the relatively high oxygen permeability (and associated high binding capacity) of oxypem materials with the low binding capacity (high on-eye movement) of ionopem materials. It is believed that this is accomplished by providing a plurality of continuous ion transmission pathways for ion and water movement through the lens.

It should be noted that ions may move through the lens via these ion pathways by a number of means. For example, ions may diffuse through the lens because of concentration differences from one surface to another. Ions may also be forced through the ion pathways by the mechanical action of blinking, with the concomittent compression forces on the lens essentially squeezing water out of the lens. In addition, the charge nature of the surfaces may

provide an electromotive force which drives ion permeation through the lens. At times, one of these driving forces may be larger than the others, while at other times the relative magnitude may reverse. This discussion is presented to clarify that the invention is not restricted by the method or driving force by which ions move through the lens.

5

Neither the measurement of water permeability nor ion permeability through an ophthalmic lens is considered a routine matter of testing in the industry. Accordingly, a discussion of the preferred ion or water permeability ranges warrants a discussion of the measurement techniques used to determine the permeability.

10

The water permeability of a lens may be determined from the rate of water permeation through the lens, from one surface to another surface. The water permeability of a lens may be determined by positioning a lens between two reservoirs holding solutions having known, and different, initial concentrations of radiolabeled water (e.g., tritiated water), and then measuring concentration of radiolabeled water in the "receiving" reservoir (the reservoir towards which the net flow of radiolabeled water is positive) as a function of time.

15

The relative ion permeability of a lens may be determined from the rate of ion permeation through the lens, from one surface to another surface. The rate of ion permeation may be determined by positioning a lens between two reservoirs holding solutions having known, and different, initial ion concentrations, and then measuring conductivity in the "receiving" reservoir (the reservoir towards which the net flow of ions is positive) as a function of time. The concentration of ions, such as sodium, can be measured accurately using a pH meter and an ion-selective electrode. Ions are believed to be transmitted through a lens, from inner to outer surfaces and vice versa, primarily by the diffusion of ions through water pathways in the lens. Ion permeability through a lens is believed to be directly proportional to water permeability through a lens.

20

25

1. Ionoflux Measurement Technique

30

The following technique, referred to herein as the "Ionoflux Technique", is a preferred method for determining the ion permeability of a lens. This technique may be used to determine the likelihood of adequate on-eye movement.

35

The "Ionoflux Technique" involves the use of a conductometer (LF 2000/C, catalog no. 300105, Wissenschaftlich-Technische Werkstätten GmbH (WTW), Germany), an electrode equipped with a temperature sensor (LR 01/T, catalog no. 302 520, WTW), a donor chamber

containing a salt solution, a receiving chamber containing about 60 ml of deionized water, a stir bar and a thermostat.

The donor chamber is specially designed for sealing a contact lens thereto, so that the donor solution does not pass around the lens (i.e., ions may only pass through the lens). The donor chamber is composed of a glass tube which is threaded at the end which is immersed in the receiving solution. The glass tube includes a centrally located hole of about 9 mm in diameter. A lid, which is threaded to mate with the glass tube, holds a lens-retaining member which includes a centrally located hole of about 8 mm in diameter. The lens-retaining member includes a male portion adapted to mate with and seal the edges of the inner (concave) surface of a lens and a female portion adapted to mate with and seal the edges of the outer (convex) surface of a lens.

The lens to be measured is placed in the lens-retaining member, between the male and female portions. The male and female portions include flexible sealing rings which are positioned between the lens and the respective male or female portion. After positioning the lens in the lens-retaining member, the lens-retaining member is placed in the threaded lid. The lid is screwed onto the glass tube to define the donor chamber. The donor chamber is filled with 16 ml of 0.1 molar NaCl solution. The receiving chamber is filled with 60 ml of deionized water. The leads of the conductivity meter are immersed in the deionized water of the receiving chamber and a stir bar is added to the receiving chamber. The receiving chamber is placed in a thermostat and the temperature is held at about 35°C. Finally, the donor chamber is immersed in the receiving chamber.

Measurements of conductivity are taken every 20 minutes for about three hours, starting 10 minutes after immersion of the donor chamber into the receiving chamber. The Ionoflux Diffusion Coefficient, D , is determined by applying Fick's law as follows:

$$D = -n' / (A \times dc/dx)$$

where n' = rate of ion transport [mol/min]

A = area of lens exposed [mm^2]

D = Ionoflux Diffusion Coefficient [mm^2/min]

dc = concentration difference [mol/L]

dx = thickness of lens [mm]

An Ionoflux Diffusion Coefficient of greater than about $6.4 \times 10^{-6} \text{ mm}^2/\text{min}$ is preferred for achieving sufficient on-eye movement. More preferably, the Ionoflux Diffusion Coefficient

is greater than about $2.6 \times 10^{-6} \text{ mm}^2/\text{min}$, while most preferably, the Ionoflux Diffusion Coefficient is greater than about $1.5 \times 10^{-6} \text{ mm}^2/\text{min}$. It must be emphasized that the Ionoflux Diffusion Coefficient correlates with ion permeability through the lens, and thereby is a predictor of on-eye movement.

2. Ionoton Measurement Technique

The following technique, referred to herein as the "Ionoton Technique", is another preferred method for determining the relative ion permeability of a lens. The technique is based on measurement of the diffusion of sodium chloride through a lens.

The "Ionoton Technique" involves the use of a pH meter (Beckman, VWR catalog no. BK123142), a VSC-1 Diffusion Cell Drive Console (Crown-Bio, Somerville, NJ), a DCB-100B Diffusion Cell (Crown-Bio), and a 6 cm sodium ion-specific electrode (Microelectronics, Londonderry, NH, catalog no. MI-414P). The technique is not limited to the aforementioned instruments or materials; equivalent instruments or materials may be used.

First, a contact lens is mounted onto an orifice of the DCB-100B cell chamber, the donor chamber. Next, the connecting cell chamber (receptor chamber) is placed against the cell chamber containing the contact lens and tightly clamped on the clamp holder supplied with the VSC-1 Drive Console. Then, a phosphate-buffered saline (PBS, Mediatech catalog no. 21-031-LV) is placed into the receptor side of the cell chamber. Stir bars are added to each cell chamber. The 6 cm electrode is placed into the PBS saline receptor side. After the electrode has equilibrated in the PBS saline, the pH meter is placed in the mV function to establish the 0 mV point. PBS which has been saturated with sodium chloride is added to the donor chamber.

The millivolt signal is recorded at 5, 10, 15, 30, 60, 120, and 180 minute intervals. The millivolt signal is converted to a sodium ion concentration by a standard curve of sodium ion concentration vs. millivolt signal. The Ionoton Ion Permeability Coefficient, P , is then determined in accordance with the following equation:

$$\ln(1 - 2C(t)/C(0)) = -2APt / Vd$$

where: $C(t)$ = concentration of sodium ions at time t in the receiving cell

$C(0)$ = initial concentration of sodium ions in donor cell

A = membrane area, i.e., lens area exposed to cells

V = volume of cell compartment (3.0 ml)

d = average lens thickness in the area exposed

P = permeability coefficient

The average thickness of the lens in the exposed test area may be determined by averaging a number of readings, e.g., 10 readings, with a low-pressure thickness-measuring instrument, such as a Mitotoya micrometer VL-50, or equivalents thereof. The Ionoton Ion Permeability Coefficient, P, having units of $\text{cm}^2/\text{second}$, may be determined from the slope of a plot of time (t) v. $\ln(1 - 2C(t)/C(0)) \times (-2At / Vd)$.

An Ionoton Ion Permeability Coefficient, P, of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{sec}$ is preferred, while greater than about $0.3 \times 10^{-6} \text{ cm}^2/\text{sec}$ is more preferred and greater than about $0.4 \times 10^{-6} \text{ cm}^2/\text{sec}$ is most preferred. It must be emphasized that the Ionoton Ion Permeability Coefficient correlates with ion permeability through the lens, and thereby is a predictor of on-eye movement.

3. Hydrodell Water Permeability Technique

The following technique, referred to herein as the "Hydrodell Technique", is a preferred method for determining the water permeability of a lens. This technique may be used to determine the likelihood of adequate on-eye movement.

The Hydrodell Technique involves the measurement of the rate of transfer of the radiolabeled solutes THO ($^3\text{H-HO}$ or tritiated water) and ^{14}C -glucose across the contact lens using a two-chamber apparatus. ^{14}C -glucose is used in this measurement technique to reveal any leak in the system during testing. The lens is mounted between chambers, which are stirred at a controllable rate. Chamber I contains a solution with a high concentration of labeled solute. Chamber II, the "receiving chamber", contains an identical solution but without the labeled solute. Samples of the solution in chambers I and II are taken at intervals over the test period. The radioactivity in the samples is measured. The permeability of the lens is calculated from the measured radioactivity, the sample times, the chamber volumes and the lens area exposed to the solutions. A more detailed description of the Hydrodell Technique follows.

a. Solution Preparation

Dulbecco's phosphate buffered saline (DPBS) is prepared by first dissolving, sequentially, about 160 g sodium chloride (NaCl), about 4 grams potassium chloride (KCl), about 23 grams disodium hydrogen orthophosphate (Na_2HPO_4), about 4 grams potassium dihydrogen orthophosphate (KH_2PO_4), and about 10 grams sodium azide in a liter of reverse-osmosis (MilliQ) water. Then, the pH is adjusted to about 7.3 by adding appropriate amounts of

HCl. Finally, the buffer solution is diluted to 1:20 (50 ml buffer solution with 950 ml reverse-osmosis water), and allowed to degas either in a screw-capped container overnight or under vacuum.

5 A Cold Glucose buffer solution is prepared by adding about 0.1 grams D-glucose to one liter of DPBS, followed by sterilization via filtration through a 0.2 μ l millipore filter and storage at 4°C until use.

10 The Chamber I solution is prepared by adding about 6 μ l THO (TR53, 1.0 mCi/ml activity, available from Amersham Australia, located in North Ryde NSW Australia) and about 16 μ l 14 C-glucose THO (in ethanol, available from Amersham Australia) to about 12 ml of the Cold Glucose buffer solution. Preferably, this solution is used within about 24 hours of preparation. The Chamber II solution is DPBS.

15 b. Apparatus Preparation

The chambers have a volume sufficient to hold about 12 ml of solution during testing. While the exact shape of the chambers is not critical, both chambers have rectangular cross-sections for ease of construction. The chambers may be made from a variety of water-proof rigid materials, preferably clear (e.g., acrylic plates, FX Plastics, Marrickville NSW Australia) so that samples may be observed during testing. Each chamber has a circular aperture of about 7 mm diameter appropriate for mounting a lens between the chambers for contact with solutions held withing the chambers. Some affixing means, such as a set of mounting bolts, are necessary to securely affix one chamber to the other with the lens mounted in between.

25 A test contact lens is mounted symmetrically over the aperture of Chamber II. Folds and wrinkles are manually removed from the lens. Chamber I is positioned adjacent the aperture and mounted lens of Chamber II, and the chambers are secured to one another using mounting bolts.

30 About 12 ml (V_2) of DPBS is placed in Chamber II. About 12 ml of the Chamber I labeled solution is placed in Chamber I, at which point time $t=0$ is established. Stirrers are added to both chambers and the stirrer speed is set at about 1200 rpm.

c. Sampling

Sampling generally starts at time $t_0 = 5$ minutes. The final sample time, t_f , is usually at about 50 minutes for high water content lenses and about 120 minutes for low water content lenses, although these times are not critical.

At time $t_0 = 5$ minutes, two samples of about 0.2 ml volume are pipetted from Chamber I, and two 0.2 ml aliquots of DPBS are added to Chamber I to restore the volume. These samples are placed into plastic counting tubes with about 4 ml Ultima Gold™ cocktail (available from Packard Instrument Co., Meriden, Connecticut) and about 0.9 ml DPBS.

Also at time t_0 , one sample of about 1.0 ml volume is pipetted from Chamber II and one 1.0 ml aliquot of DPBS is added to Chamber II to restore the volume. The sample is placed into a plastic counting tube with about 4 ml Ultima Gold™ cocktail.

At intermediate times between t_0 and t_f (e.g., every 10 minutes), one sample of about 1.0 ml volume is pipetted from Chamber II and one 1.0 ml aliquot of DPBS is added to Chamber II to restore the volume. Each sample is placed into a plastic counting tube with about 4 ml Ultima Gold™ cocktail.

At time t_f , two samples of about 0.2 ml volume are pipetted from Chamber I. These samples are placed into plastic counting tubes with about 4 ml Ultima Gold™ cocktail and about 0.9 ml DPBS.

Also at time t_f , two samples of about 1.0 ml volume are pipetted from Chamber II. These samples are placed into plastic counting tubes with about 4 ml Ultima Gold™ cocktail.

d. Measurements

The activity of the samples are measured by liquid scintillation counting, or other appropriate technique. Liquid scintillation counting may be advantageously accomplished by using protocol number 6 for $^3\text{H}/^{14}\text{C}$ on a Tri-Carb Liquid Scintillation Analyzer (1900TR, available from Packard Instrument Co.).

Three standards containing about 10^4 to 10^5 cpm THO in reversed-osmosis (MilliQ) water are prepared. Three standards containing about 10^4 to 10^5 cpm ^{14}C glucose in reversed-osmosis (MilliQ) water are also prepared. A blank containing MilliQ water is prepared.

The scintillation analyzer settings are LLA = 0 KeV and ULA = 12 KeV for ^3H ("1") in channel 1 and LLB = 12 KeV and ULB = 156 KeV for ^{14}C ("2") in channel 2. The standards and blank are counted three times during each counting of samples, and the counts are averaged. The following denote the relevant measured sample activities:

- b_1 = measured activity of blank sample in channel 1
- b_2 = measured activity of blank sample in channel 2
- S'_{11} = measured activity of standard ^3H sample in channel 1
- S'_{12} = measured activity of standard ^{14}C sample in channel 2
- S'_{21} = measured activity of standard ^3H sample in channel 1
- S'_{22} = measured activity of standard ^{14}C sample in channel 2
- y_1 = measured activity of test sample (both ^3H and ^{14}C) in channel 1
- y_2 = measured activity of test sample (both ^3H and ^{14}C) in channel 2

e. Water Permeability Calculation

In order to calculate the actual activity of a sample, the measured activities of the isotopes, ^3H and ^{14}C , must first be corrected to remove the cross-contamination error due to the presence of both isotopes in one sample. Without explaining the mathematical derivations, the following stepwise procedure is offered as an example of one method of determining water permeability from the above measurements:

- (1) Calculate S_{11} , S_{12} , S_{21} , and S_{22} , from the following equations:

$$S_{11} = S'_{11} - b_1$$

$$S_{12} = S'_{12} - b_1$$

$$S_{21} = S'_{21} - b_2$$

$$S_{22} = S'_{22} - b_2$$

- (2) Calculate a_{12} and a_{21} from the following equations:

$$a_{12} = S_{12} / S_{22}$$

$$a_{21} = S_{21} / S_{11}$$

- (3) Calculate corrected concentrations of ^3H ("1") and ^{14}C ("2") from the following equations:

$$c_1 = [(y_1 - b_1) - a_{12} (y_2 - b_2)] / (1 - a_{12} a_{21})V$$

$$c_2 = [(y_2 - b_2) - a_{21} (y_1 - b_1)] / (1 - a_{12} a_{21})V$$

where V is the volume of the test sample.

- (4) Calculate water permeability for an interval from t_1 to t_2 as follows:

$$P = V_{II} [c_{II}(t_2) - c_{II}(t_1)] / A(c_I - c_{II})(t_1 - t_2)$$

where V_{II} is the volume of Chamber II, $c_{II}(t_2)$ is the concentration of ^3H in Chamber II at time t_2 , $c_{II}(t_1)$ is the concentration of ^3H in Chamber II at time t_1 , A is the area of lens exposure, c_I is the average concentration of ^3H in Chamber I over the time period t_1 to t_2 and c_{II} is the average concentration of ^3H in Chamber II over the time period t_1 to t_2 .

The ophthalmic lenses of one embodiment of the present invention have a Hydrodell Water Permeability Coefficient of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{min}$. The ophthalmic lenses in a preferred embodiment of the invention have Hydrodell Water Permeability Coefficient of greater than about $0.3 \times 10^{-6} \text{ cm}^2/\text{min}$. The ophthalmic lenses in a preferred embodiment of the invention have Hydrodell Water Permeability Coefficient of greater than about $0.4 \times 10^{-6} \text{ cm}^2/\text{min}$.

G. Oxygen Transmissibility and Permeability

As mentioned earlier, the cornea receives oxygen primarily from the corneal surface which is exposed to the environment, in contrast to other tissues which receives oxygen from blood flow. Thus, an ophthalmic lens which may be worn on the eye for extended periods of time must allow sufficient oxygen to permeate through the lens to the cornea to sustain corneal health. One result of the cornea receiving an inadequate amount of oxygen is that the cornea will swell. In a preferred embodiment, the oxygen transmissibility of the present ophthalmic lenses is sufficient to prevent any clinically significant amount of corneal swelling from occurring.

A preferred ophthalmic lens material will have an oxygen transmissibility, Dk/t , of at least $70 (\text{cm}^3 \text{ oxygen})(\text{mm})/\text{mm}\text{-cm}^2 \times (\text{sec}/\text{mm Hg}) \times 10^{-9}$ or [barrers/mm], more preferably at least 75 barrers/mm, and most preferably at least 87 barrers/mm.

The oxygen permeability of a lens and oxygen transmissibility of a lens material may be determined by the following technique. Oxygen fluxes (J) are measured at 34 C in a wet cell (i.e., gas streams are maintained at about 100% relative humidity) using a Dk1000 instrument (available from Applied Design and Development Co., Norcross, Georgia), or similar analytical instrument. An air stream, having a known percentage of oxygen (e.g., 21%), is passed across one side of the lens at a rate of about 10 to 20 cm³/min., while a nitrogen stream is passed on the opposite side of the lens at a rate of about 10 to 20 cm³/min. The barometric pressure surrounding the system, P_{measured}, is measured. The thickness (t) of the lens in the area being exposed for testing is determined by measuring about 10 locations with a Mitotoya micrometer VL-50, or similar instrument, and averaging the measurements. The oxygen concentration in the nitrogen stream (i.e., oxygen which diffuses through the lens) is measured using the DK1000 instrument. The oxygen permeability of the lens material, D_k, is determined from the following formula:

$$D_k = Jt/(P_{\text{oxygen}})$$

where J = oxygen flux [microliters O₂/cm²-minute]

$$P_{\text{oxygen}} = (P_{\text{measured}} - P_{\text{water vapor}}) \times (\%O_2 \text{ in air stream}) \text{ [mm Hg]}$$

= partial pressure of oxygen in the air stream

$$P_{\text{measured}} = \text{barometric pressure [mm Hg]}$$

$$P_{\text{water vapor}} = 0 \text{ mm Hg at 34 C (in a dry cell) [mm Hg]}$$

$$P_{\text{water vapor}} = 40 \text{ mm Hg at 34 C (in a wet cell) [mm Hg]}$$

$$t = \text{average thickness of the lens over the exposed test area [mm]}$$

where D_k is expressed in units of barrers, i.e., [(cc oxygen)(mm)/cm²] x [sec/mm Hg] x 10⁻¹⁰.

The oxygen transmissibility (D_k/t) of the material may be calculated by dividing the oxygen permeability (D_k) by the average thickness (t) of the lens.

H. Mechanical On-eye Movement Parameters

On-eye movement of a lens may be predicted from the mechanical properties of a lens, the ion or water permeability through the lens, or both the mechanical properties and ion or water permeability. In fact, on-eye movement may be predicted more accurately from a combination of mechanical properties and ion or water permeability.

1. Tensile Modulus and Short Relaxation Time

Tensile mechanical testing may be performed on lens materials to determine mechanical properties. A procedure for preparing a test sample from a lens for subsequent mechanical testing includes the following steps:

1. Cut a parallel-sided strip through the center of the lens.. A suitable width for the strip is about 3.1 mm.
2. Immerse the test strip in a phosphate-buffered saline solution (approximating ocular fluid osmolality) for a period of about 24 hours before testing.
3. Conduct mechanical testing with the test strip immersed in phosphate-buffered saline at ambient temperature (about 23°C).

Tensile modulus may be measured by applying a strain rate of about 100% per minute to the test strip and recording the resultant stress. However, the procedure may be used at differing strain rates.

Stress relaxation is measured by applying a constant strain of about 5% to the test strip and recording the resultant stress for about 5 minutes. A useful mechanical testing instrument for this type of testing is the Vitrodyne V-200 from Liveco Biomechanical Instruments, located in Burlington, Vermont.

In order to analyze stress relaxation data, a three element Maxwell-Wiechert model (a spring and two spring-dashpot elements in parallel) may be assumed for the polymer material. For this model the stress relaxation modulus is given by the following equation:

$$E(t) = E_0 + E_1 \exp(-t/t_1) + E_2 \exp(-t/t_2)$$

Stress v. time curves may be normalized to the maximum (initial) stress induced in the samples. These curves may be analyzed by a variety of commercially available software (for example, ORIGIN software) by fitting the double exponential equation:

$$y(t) = y_0 + A_1 \exp(-t/t_1) + A_2 \exp(-t/t_2)$$

in order to obtain the stress relaxation parameters y_0 , t_1 , A_1 , t_2 , and A_2 .

It has been determined that the tensile modulus (modulus of elasticity, E) and the short relaxation time constant (t_1) correlate well with on-eye movement. In order to have appropriate on-eye movement, a lens preferably has a tensile modulus of less than about 3 MPa. More preferably, E is about 0.4 to about 2.5 MPa while a particularly preferred E is about 0.5 to about 1.5 MPa.

A preferred short relaxation time constant (t_1) is greater than about 3.5 seconds. More preferably, t_1 is greater than about 4 seconds, while a particularly preferred t_1 is greater than about 4.5 seconds.

2. Tangent Delta

Lenses may also be evaluated by dynamic mechanical analysis (DMA) methods. It has been determined that a factor known as $\tan \delta$ (i.e., tangent delta), also known as mechanical loss factor, correlates well with on-eye movement. It has been observed that lens materials which move on the eye exhibit a distinct increase in $\tan \delta$ with increasing frequency from about 0.1 to 10 Hz when these materials are tested by dynamic mechanical analysis. The $\tan \delta$ of a preferred lens material is above about 0.2 at 0.1 Hz and increases to about 0.25 or more at about 10 Hz. A $\tan \delta$ of about 0.3 or greater at 10 Hz is more preferred, while a $\tan \delta$ of about 0.5 or greater at 10 Hz is even more preferred.

DMA measurements may be determined in accordance with the following procedure. A disk of lens material having a diameter of about 3.0 mm and a thickness of about 0.50 mm is formed. The disk is placed in a Perkin-Elmer DMA-7 instrument. The disk is immersed in a solution buffered to a pH of about 7.2 and held isothermally for a period of about 10 minutes or more prior to testing, at a temperature of about 23 to 35°C. The instrument is set to a compression measuring mode and the strain on the sample is adjusted to about 2% to 4%, depending on the sample response. The amplitude of compression is about 2 to 4 μm . Measurements of the modulus of elasticity and $\tan \delta$ are taken at frequencies of about 0.1, about 1, and about 10 Hz.

3. Parameter Combinations

In order to assure appropriate movement of the lens on the eye, one may select materials which have a combination of the above-discussed properties. Therefore, a preferred group of extended-wear contact lens materials have (a) a modulus of elasticity (E) of about 1.5 MPa or less, (b) a short time relaxation constant (t_1) of greater than about 4 seconds, and (c) an Ionoton Ion Permeability Coefficient of greater than about $0.3 \times 10^{-6} \text{ cm}^2/\text{sec}$ and/or an Ionoflux Diffusion Coefficient greater than about $6.4 \times 10^{-6} \text{ mm}^2/\text{min}$.

I. Examples of Suitable Materials

1. Material "A"

One embodiment of a suitable core material of the present ophthalmic lenses is a copolymer formed from the following monomeric and macromeric components:

(a) about 5 to about 94 dry weight percent of a macromer having the segment of the formula



where

PDMS is a divalent poly(disubstituted siloxane),

ALK is an alkylene or alkyleneoxy group having at least 3 carbon atoms,

DU is a diurethane-containing group,

PAO is a divalent polyoxyalkylene, and

CP is selected from acrylates and methacrylates,

wherein said macromer has a number-average molecular weight of 2000 to 10,000;

(b) about 5 to about 60 weight percent methacryloxypropyltris(trimethylsiloxy)silane;

(c) about 1 to about 30 weight percent of an acrylate or methacrylate monomer; and

(d) 0 to 5 weight percent cross-linking agent,

with the weight percentages being based upon the dry weight of the polymer components.

A preferred polysiloxane macromer segment is defined by the formula



where

PDMS is a divalent poly(disubstituted siloxane);

CP is an isocyanatoalkyl acrylate or methacrylate, preferably isocyanatoethyl methacrylate, where the urethane group is bonded to the terminal carbon on the PAO group;

PAO is a divalent polyoxyalkylene (which may be substituted), and is preferably a polyethylene oxide, i.e., $(-\text{CH}_2-\text{CH}_2-\text{O}-)_m\text{CH}_2\text{CH}_2-$ where m may range from about 3 to about 44, more preferably about 4 to about 24;

DU is a diurethane, preferably including a cyclic structure,


where an oxygen of the urethane linkage (1) is bonded to the PAO group and an oxygen of the urethane linkage (2) is bonded to the ALK group;

and ALK is an alkylene or alkyleneoxy group having at least 3 carbon atoms, preferably a branched alkylene group or an alkyleneoxy group having 3 to 6 carbon atoms, and most preferably

a sec-butyl (i.e., $-\text{CH}_2\text{CH}_2\text{CH}(\text{CH}_3)-$) group or an ethoxypropoxy group (e.g., $-\text{O}-(\text{CH}_2)_2-\text{O}-(\text{CH}_2)_3-$).

It will be noted that the DU group can be formed from a wide variety of diisocyanates or triisocyanates, including aliphatic, cycloaliphatic or aromatic polyisocyanates. These isocyanates include, without limitation thereto, ethylene diisocyanate; 1,2-diisocyanatopropane; 1,3-diisocyanatopropane; 1,6-diisocyanatohexane; 1,2-diisocyanatocyclohexane; 1,3-diisocyanatocyclohexane; 1,4-diisocyanatobenzene, bis(4-isocyanatocyclohexyl)methane; bis(4-isocyanatocyclohexyl)methane, bis(4-isocyanatophenyl)methane; 1,2- and 1,4-toluene diisocyanate; 3,3-dichloro-4,4'-diisocyanatobiphenyl; tris(4-isocyanatophenyl)methane; 1,5-diisocyanatonaphthalene; hydrogenated toluene diisocyanate; 1-isocyanatomethyl-5-isocyanato-1,3,3-trimethylcyclohexane (i.e., isophorone diisocyanate); 1,3,5-tris(6-isocyanatohexyl) biuret; 1,6-diisocyanato-2,2,4-(2,4,4)-trimethylhexane; 2,2'-diisocyanatodiethyl fumarate; 1,5-diisocyanato-1-carboxypentane; 1,2-, 1,3-, 1,6-, 1,7-, 1,8-, 2,7- and 2,3-diisocyanatonaphthalene; 2,4- and 2,7-diisocyanato-1-methylnaphthalene; 1,4-diisocyanatomethylcyclohexane; 1,3-diisocyanato-6(7)-methylnaphthalene; 4,4'-diisocyanatobiphenyl; 4,4'-diisocyanato-3,3'-dimethoxybisphenyl; 3,3'- and 4,4'-diisocyanato-2,2'-dimethylbisphenyl; bis(4-isocyanatophenyl) ethane; bis(4-isocyanatophenyl ether); 1,2- or 1,4-toluene diisocyanate; and mixtures thereof. Preferably DU is formed from isophorone diisocyanate or toluene diisocyanate, and more preferably, isophorone diisocyanate, where one isomeric diurethane structure of isophorone diisocyanate is defined above.

A preferred Material A macromer segment has the following formula:

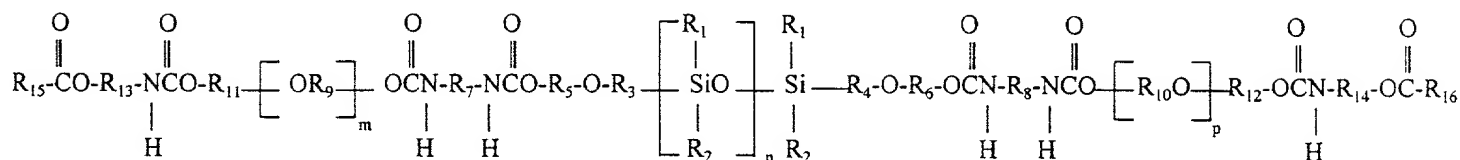

wherein:

R_1 and R_2 are lower alkyl ($\text{C}_1\text{-C}_6$), preferably $\text{C}_1\text{-C}_3$ alkyl, more preferably methyl;

R_3 , R_4 , R_5 , and R_6 are lower alkylene ($\text{C}_1\text{-C}_6$), preferably $\text{C}_1\text{-C}_3$ alkylene, more preferably $\text{C}_2\text{-C}_3$ alkylene, and preferably, where the total number of carbon atoms in R_3 and R_5 , or R_4 and R_6 is greater than 4;

R_7 and R_8 are linear or branched alkylene or an bivalent cycloalkylene, preferably bivalent cycloalkylene;

R_9 , R_{10} , R_{11} , and R_{12} are $\text{C}_1\text{-C}_2$ alkylene, preferably C_2 alkylene;

R_{13} and R_{14} are lower alkenylene ($\text{C}_1\text{-C}_6$), preferably $\text{C}_1\text{-C}_3$ alkenylene, more preferably ethylene; and

R_{15} and R_{16} are linear or branched lower alkenylene, preferably $\text{C}_2\text{-C}_3$ alkenylene;

m and p , independently of one another, may range from about 3 to about 44, more preferably about 4 to about 24; and

n may range from about 13 to about 80, more preferably, about 20 to about 50, and even more preferably about 24 to about 30.

The polysiloxane macromer may be synthesized by the following preferred process. At about room temperature (about 20-25°C), poly(dimethylsiloxane) dialkanol having hydroxyalkyl (e.g., hydroxy-sec-butyl) or hydroxyalkoxy (e.g., hydroxyethylpropoxy) end groups and having a molecular weight of about 2000 to 3000 (preferably about 2200, i.e., having about 28 repeating siloxane groups) is reacted with isophorone diisocyanate at about a 1:2 molar ratio, using about 0.2 weight percent (based on polydimethylsilane) dibutyltin dilaurate added as a catalyst. The reaction is carried out for about 36 to 60 hours. To this mixture is added poly(ethylene glycol) having a molecular weight of about 400 to 1200 (more preferably about 500 to 700) at about a 2:1 or 2.1:1 molar ratio with respect to the PDMS, about 0.4 to 0.5 weight percent dibutyltin dilaurate (based on polyethylene glycol weight), and chloroform sufficient to ensure substantial mixture homogeneity. The mixture is agitated for about 12 to 18 hours, then held at a temperature of about 44 to 48°C for about 6 to 10 hours. Excess chloroform is evaporated therefrom at about room temperature to produce a composition having about 50 weight percent solids. Then, isocyanatoethyl methacrylate is added to the mixture in about a 2:1 to 2.3:1 molar ratio with respect to PDMS. The mixture is agitated at room temperature for about 15 to 20 hours. The resulting solution contains a polysiloxane macromer having the composition described above and a number-average molecular weight of about 2000 to 10,000, more preferably about 3000 to 5000.

An advantageous polymeric material formed from the Material A macromer of the present invention is a copolymer of the aforementioned Material A macromer; an acrylated or methacrylated siloxane monomer, preferably methacryloxypropyltris (trimethylsiloxy) silane (referred to herein as "Tris"); a hydrophilic monomer, preferably 2-hydroxyethyl methacrylate (HEMA); and preferably, a cross-linking agent such as ethylene glycol dimethacrylate (EGDMA). The final copolymer composition includes about 10 to 90, preferably 70 to 90, weight percent polysiloxane macromer; about 5 to 60, preferably about 8 to 20, weight percent siloxane monomer; about 1 to 30, preferably about 1 to 5, weight percent acrylate or methacrylate monomer; and 0 to about 5, preferably up to about 2 weight percent cross-linking agent (e.g., EGDMA) based on a total dry copolymer weight. A more preferred composition includes about 80 to 84 polysiloxane macromer, about 12 to 15 weight percent TRIS, about 3 to about 4 weight percent 2-hydroxyethyl methacrylate, and about 0.7 to about 1.2 weight percent ethylene glycol dimethacrylate.

The advantageous copolymers of the present invention may be formed from the previously-described polysiloxane macromer in the following manner. A monomeric solution is formed by adding Tris, HEMA, DAROCUR® 1173 (a photoinitiator available from Ciba-Geigy

Corporation), and optionally, EGDMA to the polysiloxane macromer solution. The resulting polymer precursor solution preferably contains about 83 to about 95 weight percent polysiloxane macromer solution, about 5 to about 10 weight percent Tris, about 0.5 to about 5 weight percent HEMA, about 0.1 to about 1.0 weight percent DAROCUR® 1173, and about 0.1 to about 1.0 weight percent EGDMA. More preferably, the monomer solution contains about 87 to about 93 weight percent polysiloxane macromer solution, about 7 to about 8 weight percent Tris, about 2 to about 4 weight percent HEMA, about 0.3 to about 0.7 weight percent DAROCUR® 1173, and about 0.3 to about 0.7 weight percent EGDMA. The monomer solution is preferably agitated for about 8 to about 24 hours prior to the polymerization step.

Contact lenses may be prepared from the monomer solution by applying the monomer solution to appropriate lens molds and applying sufficient ultraviolet (UV) radiation to initiate polymerization. The ultraviolet light may be applied for a period of a few minutes to about 5 hours, depending on the intensity of light applied. Subsequent to polymerization, the contact lens may be extracted with a solvent, e.g., isopropanol, to remove unreacted monomers.

Thus, generally, one embodiment of the present invention is a method of forming a molded polymeric article suitable for ophthalmic applications (especially a contact lens), including the following steps:


- (a) contacting a poly(dialkylsiloxane) dialkanol with a diisocyanate compound in the presence of a first catalyst at conditions sufficient to cause reaction of said dialkanol with said diisocyanate, thereby forming a first mixture;
- (b) contacting said first mixture with poly(alkylene glycol), a second catalyst, and sufficient solvent to ensure mixture homogeneity, thereby forming a second mixture;
- (c) evaporating sufficient solvent from said second mixture to generate a third mixture having a solids content of about 40 to 60 weight percent;
- (d) adding isocyanatoalkyl methacrylate to said third mixture, thereby forming a fourth mixture containing a polysiloxane macromer;
- (e) adding to said fourth mixture 3-methacryloxypropyltris(trimethylsiloxy)silane (TRIS), a hydrophilic monomer, a cross-linking agent and a photoinitiator, thereby forming a fifth mixture;
- (f) placing said fifth mixture into a mold; and
- (g) applying sufficient radiation to copolymerize said monomers, thereby forming said polymeric material into a molded polymeric article.

The hydrophilic copolymers of the present invention are especially advantageous in the formation of "soft" contact lenses. In the use of the copolymers in the contact lens field, the lenses have a water content of about 10 to about 50 weight percent, more preferably about 10 to about 30 weight percent, and most preferably about 15 to about 22 weight percent, based on total hydrophilic polymer weight. Preferably, the fully-hydrated contact lens has an oxygen transmissibility (D_k/t) of greater than 70 barrers/mm (i.e., [(cc oxygen)(mm)/cm²] x [sec/mm Hg] x 10⁻¹⁰), more preferably greater than about 75 barrers/mm, and most preferably greater than about 87 barrers/mm.

2. Material "B"

Polysiloxane-comprising perfluoroalkyl ethers

The Material "B" macromer is defined by formula (I):



where each P_1 , independently of the others, is a free-radical-polymerizable group;


each Y , independently of the others, is -CONHCOO-, -CONHCONH-, -OCONHCO-, -NHCONHCO-, -NHCO-, -CONH-, -NHCONH-, -COO-, -OCO-, -NHCOO- or -OCONH-;

m and p , independently of one another, are 0 or 1;

each L , independently of the others, is a divalent radical of an organic compound having up to 20 carbon atoms;

each X_1 , independently of the others, is -NHCO-, -CONH-, -NHCONH-, -COO-, -OCO-, -NHCOO- or -OCONH-; and

Q is a bivalent polymer fragment consisting of the segments:




where $x+y$ is a number in the range of 10 to 30;

each Z , independently of the others, is a divalent radical having up to 12 carbon atoms or Z is a bond;

each E , independently of the others, is $-(OCH_2CH_2)_q-$, where q has a value of from 0 to 2, and where the link $-Z-E-$ represents the sequence $-Z-(OCH_2CH_2)_q-$; and

k is 0 or 1;

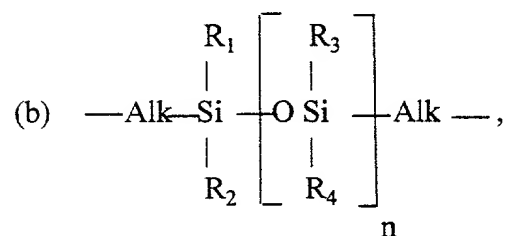

where n is an integer from 5 to 100;

Alk is alkylene having up to 20 carbon atoms;

80-100% of the radicals R_1 , R_2 , R_3 and R_4 , independently of one another, are alkyl and 0-20% of the radicals R_1 , R_2 , R_3 and R_4 , independently of one another, are alkenyl, aryl or cyanoalkyl; and

(c) X_2-R-X_2 ,

where R is a divalent organic radical having up to 20 carbon atoms, and

each X_2 , independently of the others, is $-NHCO-$, $-CONH-$, $-NHCONH-$, $-COO-$, $-OCO-$, $-NHCOO-$ or $OCONH-$;

with the provisos that there must be at least one of each segment (a), (b), and (c) in Q , that each segment (a) or (b) has a segment (c) attached to it, and that each segment (c) has a segment (a) or (b) attached to it.

The number of segments (b) in the polymer fragment Q is preferably greater than or equal to the number of segments (a). The ratio between the number of segments (a) and (b) in the polymer fragment Q is preferably 3:4, 2:3, 1:2 or 1:1. The molar ratio between the number of segments (a) and (b) in the polymer fragment Q is more preferably 2:3, 1:2 or 1:1.

The mean molecular weight of the polymer fragment Q is in the range of about 1000 to about 20000, preferably in the range of about 3000 to about 15000, particularly preferably in the range of about 5000 to about 12000.

The total number of segments (a) and (b) in the polymer fragment Q is preferably in the range of 2 to about 11, particularly preferably in the range of 2 to about 9, and in particular in the range of 2 to about 7. The smallest polymer unit Q is preferably composed of one perfluoro segment (a), one siloxane segment (b) and one segment (c).

In a preferred embodiment of the polymer fragment Q , which preferably has a composition in the abovementioned ratios, the polymer fragment Q is terminated at each end by a siloxane segment (b).

The compositions in a bivalent polymer fragment Q always correspond above and below to a mean statistical composition. This means that, for example, even individual block copolymer radicals containing identical recurring units are included, so long as the final mean statistical composition is as specified.

X_1 is preferably $-NHCONH-$, $-NHCOO-$ or $-OCONH-$, particularly preferably $-NHCOO-$ or $-OCONH-$.

The X_2-R-X_2 segment is preferably a radical derived from a diisocyanate, where each X_2 , independently of the other, is $NHCONH-$, $-NHCOO-$ or $-OCONH-$, in particular $-NHCOO-$ or $-OCONH-$.

Z is preferably a bond, lower alkylene or $-CONH-$ arylene, in which the $-CO-$ moiety is linked to a CF_2 group. Z is particularly preferably lower alkylene, in particular methylene.

q is preferably 0, 1, 1.5 or 2, particularly preferably 0 or 1.5.

The perfluoroalkoxy units OCF_2 and OCF_2CF_2 with the indices x and y in segment (a) can either have a random distribution or be in the form of blocks in a chain. The sum of the indices x+y is preferably a number in the range of 10 to 25, particularly preferably of 10 to 15. The ratio x:y is preferably in the range of 0.5 to 1.5, in particular in the range of 0.7 to 1.1.

A free-radical-polymerizable group P_1 is, for example, alkenyl, alkenylaryl or alkenylarylenealkyl having up to 20 carbon atoms. Examples of alkenyl are vinyl, allyl, 1-propen-2-yl, 1-buten-2-, -3- and -4-yl, 2-buten-3-yl, and the isomers of pentenyl, hexenyl, octenyl, decenyl and undecenyl. Examples of alkenylaryl are vinylphenyl, vinylnaphthyl or allylphenyl. An example of alkenylarylenealkyl is o-, m-, or p-vinylbenzyl.

P_1 is preferably alkenyl or alkenylaryl having up to 12 carbon atoms, particularly preferably alkenyl having up to 8 carbon atoms, in particular alkenyl having up to 4 carbon atoms.

Y is preferably -COO-, -OCO-, -NHCONH-, -NHCOO-, -OCONH-, NHCO- or -CONH-, particularly preferably -COO-, -OCO-, NHCO- or -CONH-, and in particular, -COO- or -OCO-.

In a preferred embodiment, the indices, m and p, are not simultaneously zero. If p is zero, m is preferably 1.

L is preferably alkyiene, arylene, a saturated bivalent cycloaliphatic group having 6 to 20 carbon atoms, arylenealkylene, alkylenearylene, alkylenearylenealkylene or arylenealkylenearylene.

Preferably, L is a divalent radical having up to 12 carbon atoms, particularly preferably a divalent radical having up to 8 carbon atoms. In a preferred embodiment, L is furthermore alkylene or arylene having up to 12 carbon atoms. A particularly preferred embodiment of L is lower alkylene, in particular lower alkylene having up to 4 carbon atoms.

The divalent radical R is, for example, alkylene, arylene, alkylenearylene, arylenealkylene or arylenealkylenearylene having up to 20 carbon atoms, a saturated bivalent cycloaliphatic group having 6 to 20 carbon atoms or cycloalkylenealkylenecycloalkylene having 7 to 20 carbon atoms.

In a preferred embodiment, R is alkylene, arylene, alkylenearylene, arylenealkylene or arylenealkylenearylene having up to 14 carbon atoms or a saturated divalent cycloaliphatic group having 6 to 14 carbon atoms. In a particularly preferred embodiment, R is alkylene or arylene having up to 12 carbon atoms or a saturated bivalent cycloaliphatic group having 6 to 14 carbon atoms.

In a preferred embodiment, R is alkylene or arylene having up to 10 carbon atoms or a saturated bivalent cycloaliphatic group having 6 to 10 carbon atoms.

In a particularly preferred meaning, R is a radical derived from a diisocyanate, for example from hexane 1,6-diisocyanate, 2,2,4-trimethylhexane 1,6-diisocyanate, tetramethylene diisocyanate, phenylene 1,4-diisocyanate, toluene 2,4-diisocyanate, toluene 2,6-diisocyanate, m- or p-tetramethylxylene diisocyanate, isophorone diisocyanate or cyclohexane 1,4-diisocyanate.

In a preferred meaning, n is an integer from 5 to 70, particularly preferably 10 to 50, in particular 14 to 28.

In a preferred meaning, 80-100%, preferably 85-100%, in particular 90-100%, of the radicals R_1 , R_2 , R_3 and R_4 are, independently of one another, lower alkyl having up to 8 carbon atoms, particularly preferably lower alkyl having up to 4 carbon atoms, especially lower alkyl having up to 2 carbon atoms. A further particularly preferred embodiment of R_1 , R_2 , R_3 and R_4 is methyl.

In a preferred meaning, 0-20%, preferably 0-15%, in particular 0-10%, of the radicals R_1 , R_2 , R_3 and R_4 are, independently of one another, lower alkenyl, unsubstituted or lower alkyl- or lower alkoxy-substituted phenyl or cyano(lower alkyl).

Arylene is preferably phenylene or naphthylene, which is unsubstituted or substituted by lower alkyl or lower alkoxy, in particular 1,3-phenylene, 1,4-phenylene or methyl-1,4-phenylene, 1,5-naphthylene or 1,8-naphthylene.

Aryl is a carbocyclic aromatic radical which is unsubstituted or substituted preferably by lower alkyl or lower alkoxy. Examples are phenyl, tolyl, xylyl, methoxyphenyl, t-butoxyphenyl, naphthyl and phenanthryl.

A saturated bivalent cycloaliphatic group is preferably cycloalkylene, for example cyclohexylene or cyclohexylene(lower alkylene), for example cyclohexylenemethylene, which is unsubstituted or substituted by one or more lower alkyl groups, for example methyl groups, for example trimethylcyclohexylenemethylene, for example the bivalent isophorone radical.

For the purposes of the present invention, the term "lower" in connection with radicals and compounds, unless defined otherwise, denotes, in particular, radicals or compounds having up to 8 carbon atoms, preferably having up to 4 carbon atoms.

Lower alkyl has, in particular, up to 8 carbon atoms, preferably up to 4 carbon atoms, and is, for example, methyl, ethyl, propyl, butyl, tert-butyl, pentyl, hexyl or isohexyl.

Alkylene has up to 12 carbon atoms and can be straight-chain or branched. Suitable examples are decylene, octylene, hexylene, pentylene, butylene, propylene, ethylene, methylene, 2-propylene, 2-butylene, 3-pentylene, and the like.

Lower alkylene is alkylene having up to 8 carbon atoms, particularly preferably up to 4 carbon atoms. Particularly preferred meanings of lower alkylene are propylene, ethylene and methylene.


The arylene unit in alkylenearylene or arylenealkylene is preferably phenylene, unsubstituted or substituted by lower alkyl or lower alkoxy, and the alkylene unit therein is preferably lower alkylene, such as methylene or ethylene, in particular methylene. These radicals are therefore preferably phenylenemethylene or methylenephenylene.

Lower alkoxy has, in particular, up to 8 carbon atoms, preferably up to 4 carbon atoms, and is, for example, methoxy, ethoxy, propoxy, butoxy, tert-butoxy or hexyloxy.

Arylenealkylenearylene is preferably phenylene(lower alkylene)phenylene having up to 8, in particular up to 4, carbon atoms in the alkylene unit, for example phenyleneethylenephenylene or phenylenemethylenephenylene.

The macromers of the formula (I) can be prepared by processes known per se, for example as follows:


In a first step, a perfluoropolyalkyl ether derivative of formula (IV):




in which X_3 is -OH, -NH₂, -COOH, -COCl, -NCO or -COOR₅, where -COOR₅ is generally an activated ester in which R₅ is alkyl or aryl which is unsubstituted or substituted by halogen or cyano, and the variables Z, E, k, x and y are as defined above, is preferably reacted with two equivalents of a bifunctional radical of formula (V):




in which R is as defined above and X_4 is a functional radical which is coreactive with an X_3 and is preferably -OH-, -NH₂, COOH, -COCl, -COOR₅ or -NCO; in the presence or absence of a suitable catalyst, where the reaction of X_3 with X_4 gives a group X_2 ; after which a reactive derivative of formula (VI):




is obtained which is then preferably reacted with two equivalents of an α,ω -substituted siloxane of formula (VII):

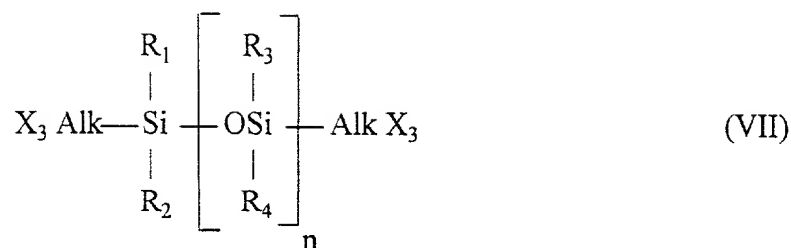


where the variables R_1 , R_2 , R_3 , R_4 , n , X_3 and Alk are as defined above, in the presence or absence of a suitable catalyst, giving a compound of formula (VIII):




in which PFPE is $(\text{E})_k\text{-Z-CF}_2\text{-(OCF}_2)_x\text{-(OCF}_2\text{CF}_2)_y\text{-OCF}_2\text{-Z-(E)}_k$, Sil is the siloxane radical



and the other variables are as defined above; after which the reactive intermediate of the formula (VIII) is preferably reacted with two equivalents of a compound of the formula (IXa) or (IXb):



in the presence or absence of a catalyst, to give the macromer of the formula (I):



in which Y_2 is a functional radical which is coreactive with X_3 and is preferably $-\text{OH}$, $-\text{NH}_2$, $-\text{COOH}$, $-\text{COCl}$, $-\text{COOR}_5$, $-\text{CONCO}$ or $-\text{NCO}$, and the variables are as defined above, and in which X_1 is formed from the reaction of X_3 with X_4 and Y is formed from the reaction of Y_2 with X_3 .

The starting materials of formula (IV) for the preparation of the perfluoroalkyl ethers are known and many are commercially available. For example, U.S. Patent No. 3,810,875 and European Patent No. 0211237 (U.S. Patent No. 4,746,575) describe such compounds. Ausimont, Italy, markets perfluoroalkyl ether dimethanols under the name Fomblin, for example Fomblin

ZDOL and Fomblin ZDOL-TX. Further Fomblin derivatives of the formula (IV) are commercially available, including, for example, Fomblin ZDISOC, in which the radical $-Z-X_3$ in the formula (IV) is $\text{CONH-C}_6\text{H}_3(\text{CH}_3)\text{-NCO}$; Fomblin ZDEAL, in which the radical $Z-X_3$ in the formula (IV) is $-\text{COOR}_5$; and Fomblin ZDIAC, in which the radical $-Z-X_3$ in the formula (IV) is $-\text{COOH}$.

Bifunctional radicals having a substitution pattern as per formula (V) exist in large numbers and are commercially available. Examples include, without limitation thereto: diisocyanates, such as isophorone diisocyanate and 2,2,4-trimethylhexane 1,6-diisocyanate; diols, such as glycol and cyclohexane-1,2-diol; dicarboxylic acids, such as adipic acid and maleic acid; diamines, such as ethylenediamine and hexamethylenediamine, diesters, such as diethyl phthalate and dibutyl malonate; derivatives containing various functional groups, such as 2-aminoethanol, monomethyl malonate, glycolic acid, salicylic acid, glycine and glycine methyl ester.

Preference is given to bifunctional derivatives of the formula (V) which have different reactivities irrespective of the nature of their functional radicals X_4 . In the case of identical radicals X_4 , this is achieved, for example, through different steric requirements in the direct vicinity of a radical X_4 . Examples thereof are isophorone diisocyanate, 2,2,4-trimethylhexane 1,6-diisocyanate and toluene 2,4-diisocyanate. The advantage of using bifunctional derivatives of formula (V) of different reactivity is that the chain length of polymer Q (number of segments (a), (b) and (c)) is easily adjustable and controllable.

α,ω -substituted siloxanes of formula (VII) are likewise commercially available, for example α,ω -hydroxypropyl-terminated polydimethylsiloxane KF6001 from Shin-Etsu.

The novel compounds can be prepared in the presence or absence of a solvent. It is advantageous to use a substantially inert solvent, i.e., one which does not participate in the reaction. Suitable examples thereof are ethers, such as tetrahydrofuran (THF), diethyl ether, diethylene glycol dimethyl ether or dioxane, halogenated hydrocarbons, such as chloroform or methylene chloride, bipolar aprotic solvents, such as acetonitrile, acetone, dimethylformamide (DMF) or dimethyl sulfoxide (DMSO), hydrocarbons, such as hexane, petroleum ether, toluene or xylene, and furthermore pyridine or N-methylmorpholine.

In the preparation of novel compounds, the reactants are advantageously employed in stoichiometric amounts. The reaction temperature can be, for example, from -30°C to 150°C , preferably from 0° to room temperature. The reaction times are in the range of about 15 minutes to 7 days, preferably about 12 hours. If necessary, the reaction is carried out under argon or nitrogen as protective gas. In urethane-forming reactions, a suitable catalyst, for example, dibutyltin dilaurate (DBTDL), is advantageously added.

The present Material "B" furthermore relates to a polymer comprising a product of the polymerization of at least one compound of formula (I) as defined above and, if desired, at least one vinylic comonomer (a). In a preferred composition of a novel copolymer, the proportion by

weight of a compound of formula (I) is in the range of 100 to 0.5%, in particular in the range of 80 to 10%, preferably in the range of 70 to 30%, based on the total polymer.

In a preferred polymer comprising a product of the polymerization of at least one compound of the formula (I), comonomer (a) is absent and the polymer is a homopolymer.

A comonomer (a) present in the novel polymer can be hydrophilic or hydrophobic or a mixture thereof. Suitable comonomers are, in particular, those which are usually used in the production of contact lenses and biomedical materials. A hydrophobic comonomer (a) is taken to mean a monomer which typically gives a homopolymer which is insoluble in water and can absorb less than 10% by weight of water. Analogously, a hydrophilic comonomer (a) is taken to mean a monomer which typically gives a homopolymer which is soluble in water or can absorb at least 10% by weight of water. Suitable hydrophobic comonomers (a) are, without limitation thereto, C₁-C₁₈alkyl and C₃-C₁₈cycloalkyl acrylates and methacrylates, C₃-C₁₈alkylacrylamides and -methacrylamides, acrylonitrile, methacrylonitrile, vinyl C₁-C₁₈alkanoates, C₂-C₁₈alkenes, C₂-C₁₈haloalkenes, styrene, (lower alkyl)styrene, lower alkyl vinyl ethers, C₂-C₁₀perfluoroalkyl acrylates and methacrylates and correspondingly partially fluorinated acrylates and methacrylates, C₃-C₁₂perfluoroalkylethylthiocarbonylaminoethyl acrylates and methacrylates, acryloxy- and methacryloxyalkylsiloxanes, N-vinylcarbazole, C₁-C₁₂alkyl esters of maleic acid, fumaric acid, itaconic acid, mesaconic acid and the like.

Preference is given, for example, to acrylonitrile, C₁-C₄alkyl esters of vinylically unsaturated carboxylic acids having 3 to 5 carbon atoms or vinyl esters of carboxylic acids having up to 5 carbon atoms.

Examples of suitable hydrophobic comonomers (a) are methyl acrylate, ethyl acrylate, propyl acrylate, isopropyl acrylate, cyclohexyl acrylate, 2-ethylhexyl acrylate, methyl methacrylate, ethyl methacrylate, propyl methacrylate, butyl acrylate, vinyl acetate, vinyl propionate, vinyl butyrate, vinyl valerate, styrene, chloroprene, vinyl chloride, vinylidene chloride, acrylonitrile, 1-butene, butadiene, methacrylonitrile, vinyltoluene, vinyl ethyl ether, perfluorohexylethylthiocarbonylaminoethyl methacrylate, isobornyl methacrylate, trifluoroethyl methacrylate, hexafluoroisopropyl methacrylate, hexafluorobutyl methacrylate, tris(trimethylsilyloxysilyl)propyl methacrylate (TRIS), 3-methacryloxy propylpentamethyldisiloxane and bis(methacryloxypropyl)tetramethyldisiloxane.

Preferred examples of hydrophobic comonomers (a) are methyl methacrylate, TRIS and acrylonitrile.

Suitable hydrophilic comonomers (a) are, without this being an exhaustive list, hydroxyl-substituted lower alkyl acrylates and methacrylates, acrylamide, methacrylamide, (lower alkyl)acrylamides and -methacrylamides, ethoxylated acrylates and methacrylates, hydroxyl-substituted (lower alkyl)acrylamides and -methacrylamides, hydroxyl-substituted lower alkyl vinyl ethers, sodium vinylsulfonate, sodium styrenesulfonate, 2-acrylamido-2-methylpropanesulfonic acid, N-vinylpyrrole, N-vinyl-2-pyrrolidone, 2-vinylloxazoline, 2-vinyl-4,4'-dialkylloxazolin-5-one, 2- and 4-vinylpyridine, vinylically unsaturated carboxylic acids

having a total of 3 to 5 carbon atoms, amino(lower alkyl)- (where the term "amino" also includes quaternary ammonium), mono(lower alkylamino)(lower alkyl) and di(lower alkylamino)(lower alkyl) acrylates and methacrylates, allyl alcohol and the like. Preference is given, for example, to N-vinyl-2-pyrrolidone, acrylamide, methacrylamide, hydroxyl-substituted lower alkyl acrylates and methacrylates, hydroxy-substituted (lower alkyl)acrylamides and -methacrylamides and vinylically unsaturated carboxylic acids having a total of 3 to 5 carbon atoms.

Examples of suitable hydrophilic comonomers (a) are hydroxyethyl methacrylate (HEMA), hydroxyethyl acrylate, hydroxypropyl acrylate, trimethylammonium 2-hydroxypropylmethacrylate hydrochloride (Blemer® QA, for example from Nippon Oil), dimethylaminoethyl methacrylate (DMAEMA), dimethylaminoethylmethacrylamide, acrylamide, methacrylamide, N,N-dimethylacrylamide (DMA), allyl alcohol, vinylpyridine, glycerol methacrylate, N-(1,1-dimethyl-3-oxobutyl)acrylamide, N-vinyl-2-pyrrolidone (NVP), acrylic acid, methacrylic acid and the like.

Preferred hydrophilic comonomers (a) are trimethylammonium 2-hydroxypropylmethacrylate hydrochloride, 2-hydroxyethyl methacrylate, dimethylaminoethyl methacrylate, trimethylammonium 2-hydroxypropylmethacrylate hydrochloride, N,N-dimethylacrylamide and N-vinyl-2-pyrrolidone.

The novel polymers are synthesized in a manner known per se from the corresponding monomers (the term monomer here also including a macromer according to the definition of the formula (I)) by a polymerization reaction customary to the person skilled in the art. Usually, a mixture of the abovementioned monomers is warmed with addition of a free-radical former. Examples of such free-radical formers are azoisobutyronitrile (AIBN), potassium peroxodisulfate, dibenzoyl peroxide, hydrogen peroxide and sodium percarbonate. If, for example, said compounds are warmed, free radicals form with homolysis, and can then initiate, for example, a polymerization.

A polymerization reaction can particularly preferably be carried out using a photoinitiator. In this case, the term photopolymerization is used. In the photopolymerization, it is appropriate to add a photoinitiator which can initiate free-radical polymerization and/or crosslinking by using light. Examples thereof are customary to the person skilled in the art; suitable photoinitiators are, in particular, benzoin methyl ether, 1-hydroxycyclohexylphenyl ketone, Darocur and Irgacur products, preferably Darocur® 1173 and Irgacur® 2959. Also suitable are reactive photoinitiators, which can be incorporated, for example, into a macromer, or can be used as a specific comonomer (a). Examples thereof are given in European Patent No. 0632329. The photopolymerization can then be initiated by actinic radiation, for example light, in particular UV light having a suitable wavelength. The spectral requirements can, if necessary, be controlled appropriately by addition of suitable photosensitizers.

A polymerization can be carried out in the presence or absence of a solvent. Suitable solvents are in principle all solvents which dissolve the monomers used, for example water, alcohols, such as lower alkanols, for example ethanol or methanol, furthermore carboxamides, such as dimethylformamide, dipolar aprotic solvents, such as dimethyl sulfoxide or methyl ethyl

ketone, ketones, for example acetone or cyclohexanone, hydrocarbons, for example toluene, ethers, for example THF, dimethoxyethane or dioxane, halogenated hydrocarbons, for example trichloroethane, and also mixtures of suitable solvents, for example mixtures of water and an alcohol, for example a water/ethanol or water/methanol mixture.

A polymer network can, if desired, be reinforced by addition of a crosslinking agent, for example a polyunsaturated comonomer (b). In this case, the term crosslinked polymers is used. The invention, therefore, furthermore relates to a crosslinked polymer comprising the product of the polymerization of a macromer of the formula (I), if desired with at least one vinylic comonomer (a) and with at least one comonomer (b).


Examples of typical comonomers (b) are allyl (meth)acrylate, lower alkylene glycol di(meth)acrylate, poly(lower alkylene) glycol di(meth)acrylate, lower alkylene di(meth)acrylate, divinyl ether, divinyl sulfone, di- and trivinylbenzene, trimethylolpropane tri(meth)acrylate, pentaerythritol tetra(meth)acrylate, bisphenol A di(meth)acrylate, methylenebis(meth)acrylamide, triallyl phthalate and diallyl phthalate.

The amount of comonomer (b) used is expressed in a proportion by weight based on the total polymer and is in the range from 20 to 0.05%, in particular in the range from 10 to 0.1%, preferably in the range from 2 to 0.1%.

3. Material "C"

Material "C" polymers are formed by polymerizing polymerizable macromers which contain free hydroxyl groups. Macromers which are built up, for example, from an amino-alkylated polysiloxane which is derivatized with at least one polyol component containing an unsaturated polymerizable side chain are disclosed. Polymers can be prepared on the one hand from the macromers according to the invention by homopolymerization. The macromers mentioned furthermore can be mixed and polymerized with one or more hydrophilic and/or hydrophobic comonomers. A special property of the macromers according to the invention is that they function as the element which controls microphase separation between selected hydrophilic and hydrophobic components in a crosslinked end product. The hydrophilic/hydrophobic microphase separation is in the region of less than 300nm. The macromers are preferably crosslinked at the phase boundaries between, for example, an acrylate comonomer on the one hand and an unsaturated polymerizable side chain of polyols bonded to polysiloxane on the other hand, by covalent bonds and additionally by reversible physical interactions, for example hydrogen bridges. These are formed, for example, by numerous amide or urethane groups. The continuous siloxane phase which exists in the phase composite has the effect of producing a surprisingly high permeability to oxygen.

The present embodiment of the invention relates to a macromer comprising at least one segment of the formula (I):




in which (a) is a polysiloxane segment,
 (b) is a polyol segment which contains at least 4 C atoms,
 Z is a segment (c) or a group X_1 ,
 (c) is defined as $X_2\text{-R-X}_2$, wherein
 R is a bivalent radical of an organic compound having up to 20 C atoms and
 each X_2 independently of the other is a bivalent radical which contains at least one
 carbonyl group,
 X_1 is defined as X_2 , and
 (d) is a radical of the formula (II):



in which P_1 is a group which can be polymerized by free radicals;
 Y and X_3 independently of one another are a bivalent radical which contains at
 least one carbonyl group;
 k is 0 or 1; and
 L is a bond or a divalent radical having up to 20 C atoms of an organic compound.

A polysiloxane segment (a) is derived from a compound of the formula (III):

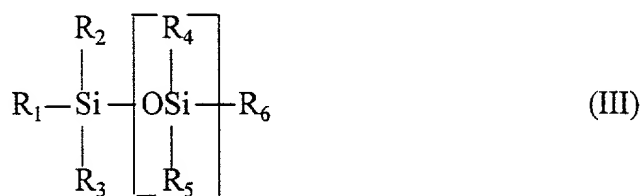

in which n is an integer from 5 to 500;
 99.8-25% of the radicals R_1, R_2, R_3, R_4, R_5 and R_6 independently of one another
 are alkyl and 0.2-75% of the radicals R_1, R_2, R_3, R_4, R_5 and R_6 independently of one
 another are partly fluorinated alkyl, aminoalkyl, alkenyl, aryl, cyanoalkyl, alk-NH-alk-NH₂ or
 alk-(OCH₂)_m-(OCH₂)_p-OR₇,
 R_7 is hydrogen or lower alkyl, alk is alkylene, and
 m and p independently of one another are an integer from 0 to 10, one molecule
 containing at least one primary amino or hydroxyl group.

The alkyleneoxy groups -(OCH₂CH₂)_m and -(OCH₂)_p in the siloxane of the formula (III)
 are either distributed randomly in a ligand alk-(OCH₂CH₂)_m-(OCH₂)_p-OR₇ or are distributed as
 blocks in a chain.

A polysiloxane segment (a) is linked a total of 1-50 times, preferably 2-30 times, and in particular 4-10 times, via a group Z with a segment (b) or another segment (a), Z in an a-Z-a sequence always being a segment (c). The linkage site in a segment (a) with a group Z is an amino or hydroxyl group reduced by one hydrogen.

In a preferred embodiment, a polysiloxane segment is derived from a compound of the formula (III) in which the radicals R_1 , R_2 , R_3 , R_4 , R_5 and R_6 are a total of 1-50 times, more preferably 2-30 times, and in particular 4-10 times, independently either terminally or pendently aminoalkyl or hydroxyalkyl, the other variables being as defined above.

In a preferred embodiment, a polysiloxane segment is derived from a compound of the formula (III) in which 95-29% of the radicals R_1 , R_2 , R_3 , R_4 , R_5 and R_6 independently of one another are alkyl and 5-71% of the radicals R_1 , R_2 , R_3 , R_4 , R_5 and R_6 independently of one another are partly fluorinated alkyl, aminoalkyl, alkenyl, aryl, cyanoalkyl, alk-NH-alk-NH₂ or alk-(OCH₂CH₂)_m-(OCH₂)_p-OR₇, and in which the variables are as defined above.

In a preferred meaning, n is an integer from 5 to 400, more preferably 10 to 250 and particularly preferably 12 to 125.

In a preferred meaning, the two terminal radicals R_1 and R_6 are aminoalkyl or hydroxyalkyl, the other variables being as defined above.

In another preferred meaning, the radicals R_4 and R_5 are 1-50 times, more preferably 2-30 times and in particular 4-10 times pendently aminoalkyl or hydroxyalkyl and the other variables are as defined above.

In another preferred meaning, the radicals R_1 , R_2 , R_3 , R_4 , R_5 and R_6 are a total of 1-50 times, more preferably 2-30 times and in particular 4-10 times, independently both terminally and pendently aminoalkyl or hydroxyalkyl and the other variables are as defined above.

If Z is X_1 , X_1 is a bivalent group which contains at least one carbonyl group. A carbonyl group mentioned is flanked in any manner, if appropriate, by -O-, -CONH-, -NHCO- or -NH-.

Examples of bivalent groups Z are typically carbonyls, esters, amides, urethanes, ureas or carbonates.

X_1 is preferably an ester, amide, urethane or urea group, in particular an ester or amide group.

X_2 is defined in the same way as X_1 and is preferably an ester, amide, urethane, carbonate or urea group, more preferably an ester, amide, urethane or urea group and in particular an amide, urethane or urea group.

If Z in formula (I) is X_1 , a polyol segment b is preferably understood as meaning a polyol derived from a carbohydrate, carbohydrate monolactone or carbohydrate dilactone. A

carbohydrate is understood as meaning a mono-, di-, tri-, tetra-, oligo- or polysaccharide. A carbohydrate lactone is understood as meaning the lactone of an aldonic or uronic acid. An aldonic or uronic acid is, for example, a carboxylic acid formed by oxidation of a mono-, di-, tri-, tetra-, oligo- or polysaccharide. Examples of aldonic acid lactones are gluconolactone, galactonolactone, lactobionolactone or maltoheptaonolactone; examples of uronic acid lactones are glucuronic acid lactone, mannuronic acid lactone or iduronic acid lactone. An example of a carbohydrate dilactone is D-glucaro-1,4:6,3-dilactone.

A carbohydrate lactone reacts, for example, with a primary amino group or a hydroxyl group of segment (a) to form a covalent amide or ester bond of the type X_1 . Such linkages are the constituent of a further preferred embodiment of macromers according to the invention. Such macromers have an alternating distribution of segments of type (a) and (b) which are interrupted by X_1 .

This embodiment of the invention preferably relates to a macromer of the formula (IV):



in which the variables are as defined above.

An embodiment of the invention furthermore preferably relates to a macromer according to formula (V):



in which the polysiloxane segment (a) contains q pendent ligands
 x is 0, 1 or 2,
 q has an average numerical value of 1-20, preferably 1-10, and in particular 1-5,
 and
 the segments (b) in a macromer according to the formula (V) are linked in total
 (per molecule) with up to 20, preferably with up to 15, and in particular with up to 6
 polymerizable segments (d).


An embodiment of the invention furthermore preferably relates to a macromer according to formula (VI):



in which a linear sequence is present,
 x is 0, 1 or 2,
 q has an average numerical value of 1-20, preferably 1-10, and in particular 1-5,
 and

the segments (b) in a macromer according to the formula (VI) are linked in total
 (per molecule) with up to 20, preferably with up to 15, and in particular with up to 6
 polymerizable segments (d).

An embodiment of the invention furthermore very preferably relates to a macromer
 according to formula (VII):

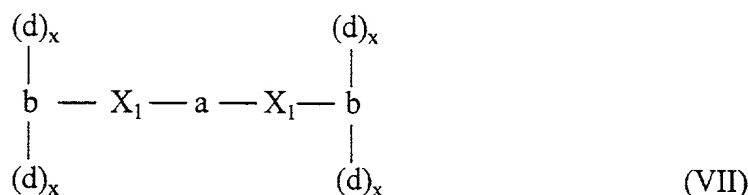

in which x is 0, 1 or 2, and
 the average number of segments (d) per molecule of the formula (VII) is preferably in the
 range from 2 to 5, and very preferably is in the range from 3 to 4.

A polyol segment (b) is derived from a polyol which carries no lactone group if the group
 Z is a segment (c). Examples of such polyols are a 1,2-polyol, for example the reduced
 monosaccharides, for example mannitol, glucitol, sorbitol or iditol, a 1,3-polyol, for example
 polyvinyl alcohol (PVA), which is derived from partly or completely hydrolysed polyvinyl
 acetate, and furthermore amino-terminal PVA telomers, aminopolyols, aminocyclodextrins,
 aminomono-, -di-, -tri-, -oligo- or -polysaccharides or cyclodextrin derivatives, for example
 hydroxypropylcyclodextrin. An abovementioned carbohydrate dilactone can be reacted, for
 example, with preferably 2 equivalents of an amino-terminal PVA telomer to give a polyol
 macromer which carries, in the central part, the carbohydrate compound derived from the
 dilactone. Such polyols of this composition are likewise understood to be a suitable polyol.

As illustrated in formula (I), a segment (b) carries at least one vinylic polymerizable
 segment (d), a linkage of a segment (d) via the bivalent radical X_3 thereof to an amino or
 hydroxyl group, of a segment (b), reduced by a hydrogen atom being intended.

A vinylic polymerizable segment (d) is incorporated either terminally or pendently
 preferably 1-20 times, more preferably 2-15 times, and in particular 2-6 times, per macromer
 molecule according to the invention.

A vinylic polymerizable segment (d) is incorporated terminally and also pendently as
 desired (as a terminal/pendent mixture) preferably 1-20 times, more preferably 2-15 times and in
 particular 2-6 times, per macromer molecule according to the invention.

A group P_1 which can be polymerized by free radicals is, for example, alkenyl, alkenylaryl or alkenylarylenealkyl having up to 20 C atoms. Examples of alkenyl are vinyl, allyl, 1-propen-2-yl, 1-buten-2- or -3- or -4-yl, 2-buten-3-yl and the isomers of pentenyl, hexenyl, octenyl, decenyl or undecenyl. Examples of alkenylaryl are vinylphenyl, vinylnaphthyl or allylphenyl. An example of alkenylarylenealkyl is vinylbenzyl.

P_1 is preferably alkenyl or alkenylaryl having up to 12 C atoms, more preferably alkenyl having up to 8 C atoms and in particular alkenyl having up to 4 C atoms.

L is preferably alkylene, arylene, a saturated bivalent cycloaliphatic group having 6 to 20 carbon atoms, arylenealkylene, alkylenearylene, alkylenearylenealkylene or arylenealkylenearylene. In a preferred meaning, L furthermore is preferably a bond.

In a preferred meaning, L is a divalent radical having up to 12 C atoms, and more preferably a divalent radical having up to 8 C atoms. In a preferred meaning, L furthermore is alkylene or arylene having up to 12 C atoms. A very preferred meaning of L is lower alkylene, in particular lower alkylene having up to 4 C atoms.

Y is preferably a carbonyl, ester, amide or urethane group, in particular a carbonyl, ester or amide group, and very preferably a carbonyl group.

In another preferred meaning, Y is absent, i.e., k is 0.

In a preferred meaning, X_3 is a urethane, urea, ester, amide or carbonate group, more preferably a urethane, urea, ester or amide group, and in particular a urethane or urea group. A vinylic polymerizable segment (d) is derived, for example, from acrylic acid, methacrylic acid, methacryloyl chloride, 2-isocyanatoethyl methacrylate (IEM), allyl isocyanate, vinyl isocyanate, the isomeric vinylbenzyl isocyanates or adducts of hydroxyethyl methacrylate (HEMA) and 2,4-tolylene diisocyanate (TDI) or isophorone diisocyanate (IPDI), in particular the 1:1 adduct.

The invention furthermore preferably relates to a macromer in which a segment (d) is incorporated either terminally or pendently or as a terminal/pendent mixture 5 times.

The invention furthermore preferably relates to a macromer in which a segment (d) is incorporated terminally 5 times.

The diradical R is, for example, alkylene, arylene, alkylenearylene, arylenealkylene or arylenealkylenearylene having up to 20 carbon atoms, a saturated bivalent cycloaliphatic group having 6 to 20 carbon atoms or cycloalkylenealkylenecycloalkylene having 7 to 20 carbon atoms.

In a preferred meaning, R is alkylene, arylene, alkylenearylene, arylenealkylene or arylenealkylenearylene having up to 14 carbon atoms or a saturated bivalent cycloaliphatic group having 6 to 14 carbon atoms.

In a preferred meaning, R is alkylene, arylene, alkylenearylene or arylenealkylene having up to 14 carbon atoms, or a saturated bivalent cycloaliphatic group having 6 to 14 carbon atoms.

In a preferred meaning, R is alkylene or arylene having up to 12 carbon atoms, or a saturated bivalent cycloaliphatic group having 6 to 14 carbon atoms.

In a preferred meaning, R is alkylene or arylene having up to 10 carbon atoms, or is a saturated bivalent cycloaliphatic group having 6 to 10 carbon atoms.

In a very preferred meaning, a segment (c) is derived from a diisocyanate, for example from hexane 1,6-diisocyanate, 2,2,4-trimethylhexane 1,6-diisocyanate, tetramethylene diisocyanate, phenylene 1,4-diisocyanate, toluene 2,4-diisocyanate, toluene 2,6-diisocyanate, m- or p-tetramethylxylene diisocyanate, isophorone diisocyanate or cyclohexane 1,4-diisocyanate.

A preferred embodiment of segment (c) is furthermore derived from a diisocyanate in which the isocyanate groups have different reactivities. The different reactivity is influenced, in particular, by the spatial requirements and/or electron density in the neighbourhood of an isocyanate group.

The average molecular weight of a macromer according to the invention is preferably in the range from about 300 to about 30,000, very preferably in the range from about 500 to about 20,000, more preferably in the range from about 800 to about 12,000, and particularly preferably in the range from about 1000 to about 10,000.

A preferred embodiment of the macromer has a segment sequence of the formula (VIII):



in which r is an integer from 1 to 10, preferably from 1 to 7, and in particular from 1 to 3;
 t is 0 or 1, and preferably 1;
 a linear (c-a) chain which may or may not be terminated by a segment (b) is present ($t=1$); and
 the above preferences apply to the total number of segments (d), which are preferably bonded to a segment (b).

A preferred embodiment of the macromer has a segment sequence of formula (IX):



in which the sequence (c-a)-(Z-b)_t hangs pendently r times on the segment (a) and may or may not be terminated by a segment (b);
 r is an integer from 1 to 10, preferably from 1 to 7, and in particular from 1 to 3;
 t is 0 or 1, and is preferably 1;
 Z is a segment (c) or a group X_1 ; and
 the above preferences apply to the total number of segments (d), which are preferably bonded to a segment (b).

Another preferred embodiment of the macromer has a segment sequence of formula (X):



in which s is an integer from 1 to 10, preferably from 1 to 7, and in particular from 1 to 3;
 B is a segment (a) or (b); and
the above preferences apply to the number of segments (d), which are bonded to a segment (b).

Another preferred embodiment of the macromer has a segment sequence of the formula (XI):



in which the structures are linear,
 s is an integer from 1 to 10, preferably from 1 to 7, and in particular from 1 to 3;
 B is a segment (a) or (b);
 t is 0 or 1, and
the above preferences apply to the number of segments (d), which are bonded to a segment (b).

The ratio of the number of segments (a) and (b) in a macromer according to the Material "C" embodiment of the invention is preferably in a range of (a):(b)=3:4, 2:3, 1:2, 1:1, 1:3 or 1:4. The total sum of segments (a) and (b) or, where appropriate, (a) and (b) and (c) is in a range from 2 to 50, preferably 3 to 30, and in particular in the range from 3 to 12.

Alkyl has up to 20 carbon atoms and can be straight-chain or branched. Suitable examples include dodecyl, octyl, hexyl, pentyl, butyl, propyl, ethyl, methyl, 2-propyl, 2-butyl or 3-pentyl.

Arylene is preferably phenylene or naphthylene, which is unsubstituted or substituted by lower alkyl or lower alkoxy, in particular 1,3-phenylene, 1,4-phenylene or methyl-1,4-phenylene; or 1,5-naphthylene or 1,8-naphthylene.

Aryl is a carbocyclic aromatic radical, which is unsubstituted or substituted by preferably lower alkyl or lower alkoxy. Examples are phenyl, tolyl, xylyl, methoxyphenyl, t-butoxyphenyl, naphthyl or phenanthryl.

A saturated bivalent cycloaliphatic group is preferably cycloalkylene, for example cyclohexylene or cyclohexylene-lower alkylene, for example cyclohexylenemethylene, which is unsubstituted or substituted by one or more lower alkyl groups, for example methyl groups, for example trimethylcyclohexylenemethylene, for example the bivalent isophorone radical. The term "lower" in the context of this invention in connection with radicals and compounds, unless defined otherwise, means, in particular, radicals or compounds having up to 8 carbon atoms, preferably having up to 4 carbon atoms.

Lower alkyl has, in particular, up to 8 carbon atoms, preferably up to 4 carbon atoms, and is, for example, methyl, ethyl, propyl, butyl, tert-butyl, pentyl, hexyl or isohexyl.

Alkylene has up to 12 carbon atoms and can be straight-chain or branched. Suitable examples include decylene, octylene, hexylene, pentylene, butylene, propylene, ethylene, methylene, 2-propylene, 2-butylene or 3-pentylene.

Lower alkylene is alkylene having up to 8, and particularly preferably having up to 4 carbon atoms. Particularly preferred examples of lower alkylenes are propylene, ethylene and methylene.

The arylene unit of alkylenearylene or arylenealkylene is preferably phenylene, which is unsubstituted or substituted by lower alkyl or lower alkoxy, and the alkylene unit of this is preferably lower alkylene, such as methylene or ethylene, in particular methylene. Such radicals are therefore preferably phenylenemethylene or methylenephenylene.

Lower alkoxy has, in particular, up to 8 carbon atoms, preferably up to 4 carbon atoms, and is, for example, methoxy, ethoxy, propoxy, butoxy, tert-butoxy or hexyloxy.

Partly fluorinated alkyl is understood as meaning alkyl in which up to 90%, preferably up to 70%, and in particular up to 50%, of the hydrogens are replaced by fluorine.

Arylenealkylenearylene is preferably phenylene-lower alkylene-phenylene having up to 8, and in particular having up to 4 carbon atoms in the alkylene unit, for example phenylenethylenephenylene or phenylenemethylenephenylene.



A monosaccharide in the context of the present invention is understood as meaning an aldopentose, aldohexose, aldotetrose, ketopentose or ketohexose.

Examples of an aldopentose are D-ribose, D-arabinose, D-xylose or D-lyxose; examples of an aldohexose are D-allose, D-altrose, D-glucose, D-mannose, D-gulose, D-idose, D-galactose, D-talose, L-fucose or L-rhamnose; examples of a ketopentose are D-ribulose or D-xylulose; examples of a tetrose are D-erythrose or threose; and examples of a ketohexose are D-psicose, D-fructose, D-sorbose or D-tagatose. Examples of a disaccharide are trehalose, maltose, somaltose, cellobiose, gentiobiose, saccharose, lactose, chitobiose, N,N-diacetylchitobiose, palatinose or sucrose. Raffinose, panose or maltotriose may be mentioned as an example of a trisaccharide. Examples of an oligosaccharide are maltotetraose, maltohexaose, chitoheptaose and furthermore cyclic oligosaccharides, such as cyclodextrins.

Cyclodextrins contain 6 to 8 identical units of α -1,4-glucose. Some examples are α -, β - and γ -cyclodextrin, derivatives of such cyclodextrins, for example hydroxypropylcyclodextrins, and branched cyclodextrins.

The macromers according to this embodiment of invention can be prepared by processes known per se, for example as follows.

In a first step, a polysiloxane containing at least one primary amino- or hydroxyalkyl group is reacted with a carbohydrate lactone, an amide or ester bond being formed and a compound of the formula (XIIa) or (XIIb) being formed:



in which the variables are as defined above and Z is a group X1,


after which the compound (XII) is reacted with an unsaturated polymerizable compound of the formula (XIII):



in which X_4 is a group which is coreactive with a hydroxyl or amino group of segment (b), an X_3 group of a segment (d) according to formula (II) being formed from such a reaction, where X_4 is preferably $-\text{COOH}$, $-\text{COOR}_{10}$, $-\text{COCl}$ or $-\text{NCO}$, in which

R_{10} is alkyl, or is aryl which is unsubstituted or substituted by lower alkyl or lower alkoxy, and the other variables are as defined above,

after which a macromer according to the formula (IV) or (V) is formed




in which the segments (d) are incorporated terminally or pendently.

Another process starts from a polysiloxane (a) which contains terminal primary amino- or hydroxyalkyl groups and is reacted with a carbohydrate dilactone to form linear structures of the formula (XIV):



in which the variables are as defined and preferred above, after which a compound of the formula (XIV) is reacted with a compound of the formula (XIII) analogously to the above process to give a macromer of the formula (VI):



in which the variables are as defined and preferred above.

Another process starts from a polysiloxane (a) which contains terminal primary amino- or hydroxyalkyl groups and is initially reacted with a bifunctional compound of the formula (XV):




in which X_4 is a group which is coreactive with a hydroxyl or amino group of segment (a), an X_2 group of a segment (c) being formed from such a reaction, where X_4 is preferably -COOH, -COOR₁₀, -COCl or -NCO, in which R₁₀ is alkyl, or aryl which is unsubstituted or substituted by lower alkyl or lower alkoxy, and R is as defined above,

after which this intermediate is reacted with a polyol which carries no lactone group to give a compound of the formula (XVI):



in which the variables are as defined and preferred above, after which the compound of the formula (XVI) is reacted with a compound of the formula (XIII) to give a macromer of the formula (X):



in which s is an integer from 1 to 10, preferably from 1 to 7, and in particular from 1 to 3; B is a segment (a) or (b); and the above preferences apply to the number of segments (d) which are bonded to a segment (b).

Another process starts from a bifunctional compound of the formula (XV):



which is reacted with an excess of polysiloxane (a) to give an -a-(c-a)_r- sequence, in which the above meanings apply, after which, in a second step, the intermediate is reacted with a polyol which carries no lactone to give a compound of the formula (XVII):



after which the compound (XVII) is reacted with the compound (XIII) to give a macromer of the formula (VIII):



in which r is an integer from 1 to 10, preferably from 1 to 7, and in particular from 1 to 3; t is 0 or 1, and is preferably 1; in which a linear (c-a) chain, which may or may not be terminated by a segment (b), is present (t=1); and the above preferences apply to the total number of segments (d), which are preferably bonded to a segment (b).

Another process starts from a carbohydrate lactone which is reacted in a first step with a compound of the formula (XIII), the lactone function being retained, after which the intermediate is reacted with a polysiloxane containing at least one amino or hydroxyl group to give a compound of the formula (IV) or (V):



in which q is typically 1 or 2, and in which the above meanings and preferences otherwise apply, and the segments (d) are incorporated terminally or pendently.

The present embodiment of the invention furthermore relates to the intermediates which are novel and which occur during synthesis of the macromers according to the invention.

The invention therefore furthermore relates to a compound of the formula (XIIa):




in which q is greater than 1,

- (a) is derived from a polysiloxane as defined by formula (I) above and
- (b) is derived from a carbohydrate dilactone.

An embodiment of the invention furthermore relates to a compound of the formula (XIIb):



in which Z, (b) and q are as defined and preferred above, but with the proviso that a segment (a) is derived from a compound of the formula (III):

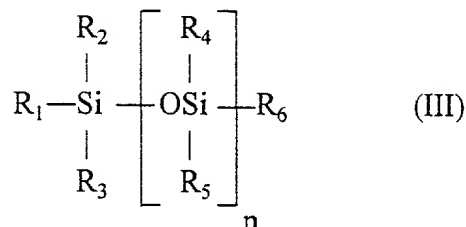

in which n is an integer from 5 to 500;

99.8 - 25% of the radicals R₁, R₂, R₃, R₄, R₅ and R₆ independently of one another are alkyl and 0.2 - 75 % of the radicals R₁, R₂, R₃, R₄, R₅ and R₆ independently of one another are partly fluorinated alkyl, aminoalkyl, alkenyl, aryl, cyanoalkyl, alk-NH-Alk-NH₂ or alk-(OCH₂CH₂)_m-(OCH₂)_p-OR₇ in which R₇ is hydrogen or lower alkyl, alk is alkylene and m and p independently of one another are an integer from 0 to 10, one molecule containing at least one primary amino or hydroxyl group and at least one partly fluorinated alkyl group. The invention furthermore relates to a compound of the formula (XVI):



in which a segment (b) is derived from a polyol which carries no lactone and the other variables are as defined and preferred above.

An embodiment of the invention furthermore relates to a compound of the formula (XVII):



in which a segment (b) is derived from a polyol which carries no lactone and the other variables are as defined and preferred above.

A siloxane (a) containing at least one primary amino or hydroxyl group is, for example, commercially obtainable. Examples are KF-6002, KF-8003, X-22-161C (Shin Etsu) or GP4 (Genesee). Other siloxanes can be synthesized with the aid of published processes.

A polyol (b) required for the synthesis is as a rule commercially obtainable. Examples are gluconolactone or lactobionolactone. Otherwise, they can be synthesized with the aid of a published process.

The compounds according to the invention can be prepared in the presence or absence of a solvent. A solvent which is largely inert, i.e., does not participate in the reaction, is advantageously used. Suitable examples of these are ethers, such as tetrahydrofuran (THF), 1,2-

dimethoxyethane, diethylene glycol dimethyl ether or dioxane, halogenated hydrocarbons, such as chloroform or methylene chloride, bipolar aprotic solvents, such as acetonitrile, acetone, dimethylformamide (DMF) or dimethyl sulfoxide (DMSO), hydrocarbons, such as toluene or xylene, and furthermore pyridine or N-methylmorpholine.

The reactants are advantageously employed in stoichiometric amounts for the preparation of the compounds according to the invention. The reaction temperature can be, for example, from -30°C to 150°C. The range from 0°C to 40°C is a preferred temperature range. The reaction times here are in the range from about 15 minutes to 7 days, preferably in the region of about 12 hours. If necessary, the reaction is carried out under argon or nitrogen as an inert gas. A suitable catalyst is advantageously added for urethane-forming reactions, for example dibutyltin dilaurate (DBTDL).

The present invention furthermore relates to a polymer comprising a polymerization product of at least one macromer according to the invention as defined above and, if appropriate, at least one vinylic comonomer (a).

The preferred composition of a polymer according to the invention comprises a weight content, with respect to the total polymer, of a macromer according to the invention in the range from 100 to 0.5%, in particular in the range from 80 to 10%, and preferably in the range from 70 to 30%.

In a preferred polymer comprising a polymerization product of at least one macromer according to the invention, comonomer (a) is absent and the polymer is preferably a homopolymer.

A comonomer (a) which is contained in a polymer according to the invention can be hydrophilic or hydrophobic or a mixture of both. Suitable comonomers include, in particular, those which are usually used for the preparation of contact lenses and biomedical materials. A hydrophobic comonomer (a) is understood as meaning monomers which typically give, as a homopolymer, polymers which are water-insoluble and can absorb less than 10% by weight of water.

Analogously, a hydrophilic comonomer (a) is understood as meaning a monomer which typically gives, as a homopolymer, a polymer which is water-soluble or can absorb at least 10% by weight of water.

Suitable hydrophobic comonomers (a) include, without this list being exhaustive, C₁-C₁₈alkyl and C₃-C₁₈cycloalkyl acrylates and methacrylates, C₃-C₁₈alkylacrylamides and -methacrylamides, acrylonitrile, methacrylonitrile, vinyl C₁-C₁₈alkanoates, C₂-C₁₈alkenes, C₂-C₁₈haloalkenes, styrene, lower alkyl styrene, lower alkyl vinyl ethers, C₂-C₁₀perfluoroalkyl acrylates and methacrylates or correspondingly partly fluorinated acrylates and methacrylates, C₃-C₁₂perfluoroalkyl-ethyl-thiocarbonylaminoethyl acrylates and methacrylates, acryloxy- and methacryloxy-alkylsiloxanes, N-vinylcarbazole and C₁-C₁₂alkyl esters of maleic acid, fumaric acid, itaconic acid, mesaconic acid and the like. Preferred comonomers are, for example,

acrylonitrile, C₁-C₄alkyl esters of vinylically unsaturated carboxylic acids having 3 to 5 carbon atoms, or vinyl esters of carboxylic acids having up to 5 carbon atoms.

Examples of suitable hydrophobic comonomers (a) include methyl acrylate, ethyl acrylate, propyl acrylate, isopropyl acrylate, isobutyl acrylate (IBA), isooctyl acrylate (OA), isodecyl acrylate (DA), cyclohexyl acrylate, 2-ethylhexyl acrylate (EHA), methyl methacrylate, ethyl methacrylate, propyl methacrylate, butyl acrylate, vinyl acetate, vinyl propionate, vinyl butyrate, vinyl valerate, styrene, chloroprene, vinyl chloride, vinylidene chloride, acrylonitrile, 1-butene, butadiene, methacrylonitrile, vinyl toluene, vinyl ethyl ether, perfluorohexylethylthiocarbonylaminoethyl methacrylate, isobornyl methacrylate, trifluoroethyl methacrylate, hexafluoroisopropyl methacrylate, hexafluorobutyl (meth)acrylate (HFBMA and HFBA), tris-trimethylsilyloxy-silyl-propyl methacrylate (TRIS), 3-methacryloxypropylpentamethyldisiloxane and bis(methacryloxypropyl) tetramethyldisiloxane. Preferred examples of hydrophobic comonomers (a) are methyl methacrylate, IBA, HFBA, HFBMA, OA, EHA, DA, TRIS and acrylonitrile.

Suitable hydrophilic comonomers (a) include, without this list being conclusive, hydroxyl-substituted lower alkyl acrylates and methacrylates, acrylamide, methacrylamide, lower alkylacrylamides and -methacrylamides, ethoxylated acrylates and methacrylates, hydroxyl-substituted lower alkylacrylamides and -methacrylamides, hydroxyl-substituted lower alkyl vinyl ethers, sodium vinylsulfonate, sodium styrenesulfonate, 2-acrylamido-2-methylpropanesulfonic acid, N-vinylpyrrole, N-vinyl-2-pyrrolidone, 2-vinyloxazoline, 2-vinyl-4,4'-dialkyloxazolin-5-one, 2- and 4-vinylpyridine, vinylically unsaturated carboxylic acids having a total of 3 to 5 carbon atoms, amino-lower alkyl (where the term "amino" also includes quaternary ammonium), mono-lower alkylamino-lower alkyl and di-lower alkylamino-lower alkyl acrylates and methacrylates, allyl alcohol and the like. Preferred comonomers are, for example, N-vinyl-2-pyrrolidone, acrylamide, methacrylamide, hydroxyl-substituted lower alkyl acrylates and methacrylates, hydroxyl-substituted lower alkylacrylamides and -methacrylamides and vinylically unsaturated carboxylic acids having a total of 3 to 5 carbon atoms.

Examples of suitable hydrophilic comonomers (a) include hydroxyethyl methacrylate (HEMA), hydroxyethyl acrylate, hydroxypropyl acrylate, trimethylammonium-2-hydroxypropyl methacrylate hydrochloride (Blemer®QA, for example from Nippon Oil), dimethylaminoethyl methacrylate (DMAEMA), dimethylaminoethyl methacrylamide, acrylamide, methacrylamide, N,N-dimethylacrylamide (DMA), allyl alcohol, vinylpyridine, glycerol methacrylate, N-(1,1-dimethyl-3-oxobutyl)acrylamide, N-vinyl-2-pyrrolidone (NVP), acrylic acid, methacrylic acid and the like.

Preferred hydrophilic comonomers (a) are 2-hydroxyethyl methacrylate, dimethylaminoethyl methacrylate, trimethylammonium-2-hydroxypropyl methacrylate hydrochloride, N,N-dimethylacrylamide and N-vinyl-2-pyrrolidone.

The polymers according to the invention are built up in a manner known per se from the corresponding monomers (the term monomers here also including a macromer according to the invention) by a polymerization reaction with which the expert is familiar. Usually, a mixture of

the abovementioned monomers is heated, with the addition of an agent which forms free radicals. Such an agent which forms free radicals is, for example, azoisobutyronitrile (AIBN), potassium peroxodisulfate, dibenzoyl peroxide, hydrogen peroxide or sodium percarbonate. If the compounds mentioned are heated, for example, free radicals are then formed, by homolysis, and can then, for example, initiate a polymerization.

A polymerization reaction can particularly preferably be carried out using a photoinitiator. Photopolymerization is the term used in this case. For photopolymerization, a photoinitiator which can initiate free radical polymerization and/or crosslinking by the use of light is suitably added. Examples of this are familiar to the expert, and specifically, suitable photoinitiators are benzoin methyl ether, 1-hydroxycyclohexyl phenyl ketone and Darocur and Irgacur types, preferably Darocur 1173® and Darocur 2959®. Reactive photoinitiators which can be incorporated, for example, into a macromer or can be used as a special comonomer (a) are also suitable. Examples of these are to be found in EP 632 329. The photopolymerization can then be triggered off by actinic radiation, for example light, in particular UV light of a suitable wavelength. The spectral requirements can be controlled accordingly, if appropriate, by addition of suitable photosensitizers.

Polymerization can be carried out in the presence or absence of a solvent. Suitable solvents are in principle all solvents which dissolve the monomers used, for example water, alcohols, such as lower alkanols, for example ethanol or methanol, and furthermore carboxylic acid amides, such as dimethylformamide, dipolar aprotic solvents, such as dimethyl sulfoxide or methyl ethyl ketone, ketones, for example acetone or cyclohexanone, hydrocarbons, for example toluene, ethers, for example THF, dimethoxyethane or dioxane, and halogenated hydrocarbons, for example trichloroethane, and also mixtures of suitable solvents, for example mixtures of water with an alcohol, for example a water/ethanol or a water/methanol mixture.


If appropriate, a polymer network can be intensified by addition of a so-called crosslinking agent, for example a polyunsaturated comonomer (b). The invention furthermore relates to a polymer comprising the polymerization product of a macromer according to the invention with, if appropriate, at least one vinylic comonomer (a) and with at least one comonomer (b).

Examples of typical comonomers (b) are, for example, allyl(meth)acrylate, lower alkylene glycol di(meth)acrylate, poly lower alkylene glycol di(meth)acrylate, lower alkylene di(meth)acrylate, divinyl ether, divinyl sulfone, di- or trivinylbenzene, trimethylolpropane tri(meth)acrylate, pentaerythritol tetra(meth)acrylate, bisphenol A di(meth)acrylate, methylenebis(meth)acrylamide, triallyl phthalate or diallyl phthalate.

The amount of comonomer (b) used is expressed in the weight content with respect to the total polymer and is in the range from 20 to 0.05 %, in particular in the range from 10 to 0.1%, and preferably in the range from 2 to 0.1%.

4. "Material D"

Another advantageous embodiment of the present invention relates to the use of a siloxane-containing macromer which is formed from a poly(dialkylsiloxane) dialkoxyalkanol having the following structure:

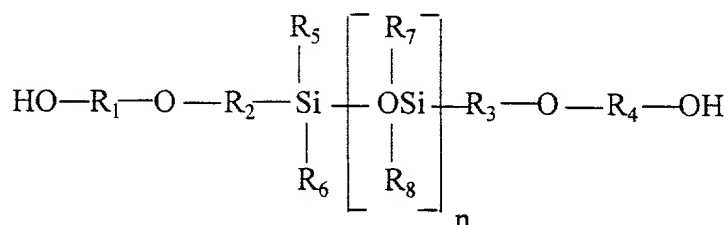

where n is an integer from about 5 to about 500, preferably about 20 to 200, more preferably about 20 to 100;

the radicals R_1 , R_2 , R_3 , and R_4 , independently of one another, are lower alkylene, preferably C_1 - C_6 alkylene, more preferably C_1 - C_3 alkylene, wherein in a preferred embodiment, the total number of carbon atoms in R_1 and R_2 or in R_3 and R_4 is greater than 4; and

R_5 , R_6 , R_7 , and R_8 are, independently of one another, are lower alkyl, preferably C_1 - C_6 alkyl, more preferably C_1 - C_3 alkyl.


The general structure of the Material D macromer follows:



where the ACRYLATE is selected from acrylates and methacrylates; LINK is selected from urethanes and dirurethane linkages, $\text{ALK} - \text{O} - \text{ALK}$ is as defined above ($\text{R}_1\text{-O-R}_2$ or $\text{R}_3\text{-O-R}_4$), and PDAS is a poly(dialkylsiloxane).

For example, a Material D macromer may be prepared by reacting isophorone diisocyanate, 2-hydroxyethyl (meth)acrylate and a poly(dialkylsiloxane) dialkoxyalkanol in the presence of a catalyst.

A preferred Material D macromer may be prepared by reacting a slight excess of isocyanatoalkyl methacrylate, especially isocyanatoethyl methacrylate (IEM), with a poly(dialkylsiloxane) dialkoxyalkanol, preferably poly(dimethylsiloxane) dipropoxyethanol, in the presence of a catalyst, especially an organotin catalyst such as dibutyltin dilaurate (DBTL). The primary resulting structure is as follows:

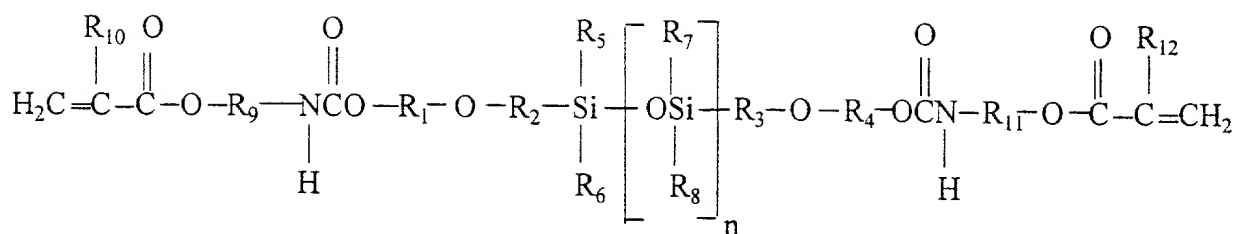

where R_9 and R_{11} are alkylene; preferably C_{1-6} alkylene, more preferably ethylene;
 R_{10} and R_{12} are methyl or hydrogen.

The "Material D" prepolymer mixture may be formed by mixing the aforementioned siloxane-containing macromer with one or more hydrophilic monomers and a thermoinitiator or a photoinitiator such as Darocur® 1173. A solvent, such as hexanol, is preferably added to homogenize the mixture. Preferably, an appropriate amount of TRIS is added to lower the modulus of elasticity to a desired level. The ionoperm monomer or monomers may be selected from any of the aforementioned ionoperm or hydrophilic monomers. Preferably, the ionoperm monomer is selected from the group consisting of acrylates, methacrylates, acrylamides, methacrylamides and mixtures thereof. More preferably, the ionoperm monomers are selected from dimethylacrylamide (DMA) and methacrylic acid (MAA).

A preferred "Material D" prepolymer mixture, in weight percentages based on total mixture weight, includes about 35 to 60% Material D macromer; about 6 to 25% TRIS; about 15 to 35% ionoperm monomer; about 0.1 to 1% photoinitiator; and about 10 to 20% solvent. A more preferred "Material D" prepolymer mixture, in weight percentages based on total mixture weight, includes the following: about 40 to 55% Material D macromer; about 8 to 16% TRIS; about 20 to 30% dimethylacrylamide; about 0.2 to 2% methacrylic acid; about 0.1 to 1% photoinitiator; and about 10 to 20% solvent. A particularly preferred "Material D" prepolymer mixture, in weight percentages based on total mixture weight, includes the following: about 44 to 50% Material D macromer; about 10 to 12% TRIS; about 22 to 26% dimethylacrylamide; about 0 to 1% methacrylic acid; about 0.2 to 0.6% photoinitiator; and about 10 to 20% solvent.

The prepolymer mixture may be formed into lenses and other ophthalmic devices by any of a number of techniques known in the art and disclosed herein. Preferably, the prepolymer mixture is conveyed into a concave half of a lens mold, the convex mold half is mated with the concave mold half, and an appropriate amount of radiation is applied to initiate polymerization. While ultraviolet (UV) radiation is preferred, a number of other energy sources known in the art and disclosed herein may also be used.

The Material D ophthalmic lens is preferably a polymerization product of the following macromeric and monomeric components, based on total weight of polymerizable material:

- (a) about 45 to about 65 percent Material D macromer;
- (b) about 5 to about 25 percent TRIS; and

(c) about 20 to about 40 percent ionoperm monomer.

The Material D ophthalmic lens is more preferably a polymerization product of the following macromeric and monomeric components, based on total weight of polymerizable material:

- (a) about 50 to about 60 percent Material D macromer;
- (b) about 10 to about 20 percent TRIS; and
- (c) about 25 to about 35 percent ionoperm monomer.

In a preferred embodiment, the Material D ophthalmic lens is a polymerization product of the following macromeric and monomeric components, based on total weight of polymerizable material:

- (a) about 50 to about 60 percent Material D macromer;
- (b) about 10 to about 20 percent TRIS;
- (c) about 25 to about 35 percent DMA; and
- (d) up to about 2 percent MAA.

In another preferred embodiment, about 0.2 to 1.0 weight percent MAA is used, together with the components (a), (b), and (c) in the above-cited amounts.

III. OPHTHALMICALLY COMPATIBLE SURFACES

The ophthalmic lenses of the present invention have a surface which is biocompatible with ocular tissue and ocular fluids during the desired extended period of contact. In one preferred embodiment, the ophthalmic lenses of the present invention include a core material, as defined above, surrounded, at least in part, by a surface which is more hydrophilic and lipophobic than the core material. A hydrophilic surface is desirable in order to enhance the compatibility of the lens with the ocular tissues and tear fluids. As surface hydrophilicity increases, undesirable attraction and adherence of lipids and proteinaceous matter typically decreases. There are factors other than surface hydrophilicity, such as immunological response, which may contribute to deposit accumulation on the lens. Deposition of lipids and proteinaceous matter causes haze on the lens, thereby reducing visual clarity. Proteinaceous deposits may also cause other problems, such as irritation to the eye. After extended periods of continuous or intermittent wear, the lens must be removed from the eye for cleaning, i.e., deposit removal. Therefore, increased surface hydrophilicity, and concomittent reductions in deposits of biological matter, allows increased wear time.

"Surface treatment processes", as used herein, refers to processes to render a surface more ophthalmically compatible, in which, by means of contact with a vapor or liquid, and/or by means of application of an energy source (1) a coating is applied to the surface of an article, (2) chemical species are adsorbed onto the surface of an article, (3) the chemical nature (e.g., electrostatic charge) of chemical groups on the surface of an article are altered, or (4) the surface properties of an article are otherwise modified.

There are a variety of methods disclosed in the art for rendering a surface of a material hydrophilic. For example, the lens may be coated with a layer of a hydrophilic polymeric material. Alternatively, hydrophilic groups may be grafted onto the surface of the lens, thereby producing a monolayer of hydrophilic material. These coating or grafting processes may be effected by a number of processes, including without limitation thereto, exposing the lens to plasma gas or immersing the lens in a monomeric solution under appropriate conditions.

Another set of methods of altering the surface properties of a lens involves treatment prior to polymerization to form the lens. For example, the mold may be treated with a plasma (i.e., an ionized gas), a static electrical charge, irradiation, or other energy source, thereby causing the prepolymerization mixture immediately adjacent the mold surface to differ in composition from the core of the prepolymerization mixture.

A preferred class of surface treatment processes are plasma processes, in which an ionized gas is applied to the surface of an article. Plasma gases and processing conditions are described more fully in U.S. Patent Nos. 4,312,575 and 4,632,844, which are incorporated herein by reference. The plasma gas is preferably a mixture of lower alkanes and nitrogen, oxygen or an inert gas.

In a preferred embodiment, the lens is plasma treated in the presence of a mixture of (a) a C₁₋₆ alkane and (b) a gas selected from the group consisting of nitrogen, argon, oxygen, and mixtures thereof. In a more preferred embodiment, the lens is plasma treated in the presence of a mixture of methane and air.

IV. UTILITY

A. Ophthalmic Lenses

The novel polymers or crosslinked polymers can be converted into ophthalmic moldings in a manner known in the art, in particular into contact lenses, for example by carrying out the photopolymerization or photocrosslinking of the novel polymers in a suitable contact lens mold. Examples of novel ophthalmic moldings, in addition to contact lenses, include without limitation thereto, contact lenses for vision correction, contact lenses for eye color modification, ophthalmic drug delivery devices, ophthalmic wound healing devices, and the like.

B. Contact Lenses

A specific embodiment of the invention is directed to contact lenses which comprise essentially a novel polymer or polymeric network. Such contact lenses have a range of unusual and extremely advantageous properties. Amongst these properties are, for example, their excellent compatibility with the human cornea (if necessary after suitable surface treatment (coating)) and with tear fluid, which is based on a balanced ratio between water content and water permeability, oxygen permeability and mechanical and adsorptive properties. This balance of desirable properties results in high comfort and the absence of irritation and allergenic effects. Owing to their favorable permeability properties with respect to various salts, nutrients, water and diverse other components of tear fluid and gases (CO₂ and O₂), the novel contact lenses have no effect, or virtually no effect, on the natural metabolic processes in the cornea. In contrast to many other siloxane-containing contact lenses, the present innovative extended-wear lenses have chemical and mechanical properties and ion permeability sufficient to avoid the undesired binding effect. Furthermore, the novel contact lenses have high dimensional stability and shelf life.

It must be emphasized that this balance of properties, especially the high ion permeability in combination with the high oxygen permeability, is key to producing a true extended-wear contact lens. The high oxygen permeability is required to prevent corneal swelling, thereby reducing the likelihood of ocular damage and wearer discomfort during periods of extended wear. The high ion permeability enables the lens to move on the eye such that corneal health is not substantially altered and wearer comfort is acceptable during a period of extended, continuous contact with ocular tissue and ocular fluids.

The preferred extended-wear contact lenses of the present invention are those which are comfortable over the period of extended wear. If the lens diameter is too small, the eyelids will not cover any portion of the lens when the eye is open. Thus, the eyelids will contact the edge of the lens each time the eyelid is closed. This repeated eyelid-lens interaction typically causes irritation, wearer discomfort, and lens dislodgement. Accordingly, the preferred contact lens diameters are those which are sufficiently large to minimize eyelid-lens interaction and the associated irritation. Preferably, the contact lens has a diameter of about 12 to about 16 millimeters, more preferably about 13 to 15 mm, and most preferably about 13.5 to 14.8 mm.

V. METHODS OF USE AS EXTENDED-WEAR LENSES

The above-described ophthalmic lenses have special utility as extended-wear contact lenses. Contact lenses having sufficient oxygen and water transmission rates from inner (base curve) to outer (front curve) surface may be continuously worn for long periods of time without substantial corneal swelling or wearer discomfort. The method of wear includes (a) applying the lens to the eye and (b) allowing the lens to remain in intimate contact with the eye and tear fluids for a period of at least 24 hours without substantial adverse impact on corneal health or wearer comfort.

A preferred method includes additional steps of (c) removing the lens from the ocular environment; (d) treating the lens (i.e., disinfecting or cleaning the lens); (e) re-applying the lens to the eye; and (f) allowing the lens to remain in intimate contact with the eye and tear fluids for a period of at least an additional 24 hours without substantial adverse impact on corneal health or wearer comfort.

In a preferred embodiment, the lens is worn for a continuous period of at least four (4) days without substantial corneal swelling or wearer discomfort. In another preferred embodiment, the lens is worn for a continuous period of at least seven (7) days without substantial corneal swelling or wearer discomfort. In another preferred embodiment, the lens is worn for a continuous period of at least 14 days without substantial corneal swelling or wearer discomfort. In yet another preferred embodiment, the lens is worn for a continuous period of at least 30 days without substantial corneal swelling or wearer discomfort.

VI. METHODS OF MANUFACTURE

The ophthalmic lens may be manufactured, generally, by thoroughly mixing the oxypm and ionperm polymerizable materials, applying an appropriate amount of the mixture to a lens mold cavity, and initiating polymerization. Photoinitiators, such as those commercially available photoinitiators disclosed above, may be added to the prepolymerization mixture to aid in initiating polymerization. Polymerization may be initiated by a number of well known techniques, which, depending on the polymerizable material, may include application of radiation such as microwave, thermal, e-beam and ultraviolet. A preferred method of initiating polymerization is by application of ultraviolet radiation.

It has been discovered that the ion and/or water permeability of some of the aforementioned core materials may be increased by initiating and completing polymerization in an atmosphere which is substantially free of oxygen. Suitable gases which are readily commercially available include, without limitation thereto, nitrogen and carbon dioxide. Thus, in a preferred embodiment, the oxypm and ionperm polymerizable materials are polymerized in an atmosphere having less than about 10000 ppm oxygen. More preferably, the atmosphere surrounding the polymerizable material contains less than about 1000 ppm oxygen. Even more preferably, the surrounding atmosphere contains less than about 100 ppm oxygen, while the most preferred oxygen content is less than about 20 ppm.

In the aforementioned embodiment, the prepolymer mixture must be degassed prior to polymerization. The degassing may be accomplished by a number of techniques known in the art. One technique for degassing the prepolymer mixture involves the use of a series of freezing and thawing steps which are repeated until the appropriate gas concentration level is achieved in the prepolymer mixture. This freeze/thaw method involves cooling the prepolymer mixture until the mixture solidifies, applying a vacuum to the solidified prepolymer mixture, discontinuing the vacuum, and thawing the prepolymer mixture until the mixture is again in liquid form. While

this degassing technique is advantageous in a laboratory setting, other degassing techniques known in the art may be more advantageous for commercial lens manufacturing processes.

Alternatively, the atmosphere surrounding the lens mold may be include oxygen, under certain conditions. For example, if the lens mold halves seal adequately to one another and the lens mold material has a low rate of oxygen permeability (e.g., polypropylene), it is possible to polymerize a degassed prepolymer mixture in a mold surrounded by ambient air without reaching prepolymer oxygen concentrations sufficiently high to substantially reduce ion or water permeability of the final lens. Thus, in another preferred embodiment of double-sided molding, the lens is formed by the following steps: (1) the prepolymer mixture is degassed, (2) a lens mold half is filled with the prepolymer mixture, (3) the mold halves are sealed to one another, and (4) the polymerization is initiated to form the lens, where the lens mold halves are formed from a material having a low oxygen permeability and steps (2)-(4) may occur in the presence or absence of oxygen. In this embodiment, it is preferred that the lens molds are stored in an inert substantially oxygen-free atmosphere, e.g., nitrogen or carbon dioxide, prior to use.

An essential feature of the manufacturing methods of the present innovative lenses is that a balance of high oxygen permeability and high ion permeability is achieved. Manufacturing techniques and conditions which result in lowering either the oxygen permeability or the ion permeability below levels sufficient to maintain good corneal health and on-eye movement during periods of extended wear are unacceptable to produce the innovative extended-wear contact lenses of the present invention.

Preferably, the manufacturing method produces a contact lens having a Dk/t of at least 70 barrers/mm and a Ionoton Ion Permeability Coefficient of at least $0.2 \times 10^{-6} \text{ cm}^2/\text{sec}$. More preferably, the manufacturing method produces a contact lens having a Dk/t of at least 75 barrers/mm and a Ionoton Ion Permeability Coefficient of at least $0.3 \times 10^{-6} \text{ cm}^2/\text{sec}$. The manufacturing method preferably provides a contact lens having a Dk/t of at least 87 barrers/mm and a Ionoton Ion Permeability Coefficient of at least $0.4 \times 10^{-6} \text{ cm}^2/\text{sec}$.

The previous disclosure will enable one having ordinary skill in the art to practice the invention. In order to better enable the reader to understand specific embodiments and the advantages thereof, reference to the following examples is suggested. However, the following examples should not be read to limit the scope of the invention.

Examples A-D are arranged in accordance with the materials defined above. Thus, Examples A-1, A-2, etc. relate to Material "A" as defined above, Examples B-1, B-2, etc. relate to Material "B" as defined above, Examples C-1, C-2, etc. relate to Material "C", and Examples D-1, D-2, etc. relate to Material "D". Temperatures are stated in degrees Celsius unless otherwise specified.

Examples E, F and G are directed to demonstrating a correlation between on-eye movement and the Ionoton Ion Permeability Coefficient, the Ionoflux Ion Permeability Coefficient, and the Hydrodell Water Permeability Coefficient, respectively.

EXAMPLE A-1

A polysiloxane macromer is prepared by reacting, at room temperature (about 21 C), one mole equivalent (about 100 grams) of poly(dimethylsiloxane) dialkanol (Shin Etsu Chemical Co., Tokyo, Japan) having hydroxyethyl propoxy end groups with 2 mole equivalents (about 21.2 grams) of isophorone diisocyanate (Aldrich Chemical Co., Milwaukee, Wisconsin) in the presence of about 0.2 grams dibutyltin dilaurate catalyst (Pfaltz & Bauer, Inc., Waterbury, Connecticut). After about 48 hours reaction time, 2.02 mole equivalents (about 38.7 grams) of poly(ethylene glycol) ("PEG", about 610 g/mol Mn, Dow Chemical Corp., Midland, MI) and about 0.17 grams of dibutyltin dilaurate (about 0.43% by weight PEG) are added to 80 grams of the reaction product from the prior step. Sufficient chloroform (Aldrich Chemical Co.) is added to the mixture to make the mixture homogeneous. This mixture is stirred at room temperature for about 15 hours. Next, the mixture is stirred for about 8 hours at a temperature of about 44 to 48 C, with the temperature held substantially constant by a surrounding oil bath. The chloroform is then evaporated, in order to achieve a final concentration of about 50% by weight solids, by stirring the mixture at room temperature for about 8 hours. Then, about 2.14 mole equivalents (about 10.4 grams) of isocyanatoethyl methacrylate ("IEM", Monomer Polymer, Inc., Feasterville, PA) is added to the mixture. Finally, the mixture is covered with aluminum foil and stirred at room temperature for about 17 hours, yielding a polysiloxane-containing macromer having a number-average molecular weight (Mn) of about 4000 grams per mole.

The macromeric solution is then polymerized, in the presence of about 0.5 weight percent DAROCUR® 1173 photoinitiator (Ciba-Geigy Corporation, Ardsley, NY) to form contact lenses. Polypropylene contact lens molds are filled with the copolymer precursor solution. Ultraviolet light (about 300 to 400 nm) at about 3-6 mW/cm² is applied to the solution in the mold for about 3 hours at room temperature. The UV light, in conjunction with the photoinitiator, causes polymerization, thereby allowing the solution to form a contact lens having the shape of the mold. The lenses are extracted with isopropanol to remove the remaining chloroform solvent and any unreacted components. The product is a polysiloxane-containing polymeric contact lens.

Prior to taking oxygen permeability measurements, the lenses are hydrated by placing the lenses in isotonic buffered saline solution for at least eight hours. After hydration, if necessary because of handling, each lens is cleaned with MIRAFLow® Daily Cleaner (CIBA Vision Corporation, Duluth, Georgia) to remove grease and lipids prior to testing. Excess
5 MIRAFLow® cleaner is removed by rinsing with saline or purified water.

Oxygen fluxes (J) are measured at 34 C in a wet cell (i.e., gas streams are maintained at about 100% relative humidity) using a Dk1000 instrument. Oxygen transmissibility, D_k/t , is determined as outlined in the portions of the specification relating to oxygen permeability and
10 transmissibility.

EXAMPLE A-2

A polysiloxane macromer is first prepared substantially in accordance with the procedure described in Example A-1.
15

A copolymer precursor solution is prepared by mixing about 180 grams polysiloxane-containing macromer, about 15 grams 3-methacryloxypropyltris (trimethylsiloxy) silane (Shin Etsu), about 4 grams 2-hydroxyethyl methacrylate ("HEMA"), about one gram ethylene glycol dimethacrylate ("EDGMA"), and about one gram DAROCUR® 1173 photoinitiator at room temperature for about 16 hours.
20

The copolymer precursor solution is then polymerized to form contact lenses.
25 Polypropylene contact lens molds are filled with the copolymer precursor solution. Ultraviolet light (about 300 to 400 nm) at about 3-6 mW/cm² is applied to the solution in the mold for about 3 hours at room temperature. The UV light causes polymerization, thereby allowing the solution to form a contact lens having the shape of the mold. The lens are extracted with isopropanol to remove remaining chloroform solvent and any unreacted components. A preferred resulting
30 polymer contains about 81.8 weight percent polysiloxane macromer, about 13.6% TRIS, about 3.6% 2-hydroxyethyl methacrylate, and about 0.9% EDGMA. [059-87]

The contact lens is degassed by placing the lens under suitable vacuum for a period sufficient to remove substantially all gas from the lens matrix. Fully hydrated degassed contact
35 lenses having this composition have a Dk of about 87 barrers, a water content of about 19 weight percent, and a modulus of elasticity of about 2.5 MPa.

EXAMPLE A-3

5 A contact lens is prepared substantially in accordance with the procedure described in Example A-2, but having the final composition of about 19.5 weight percent polysiloxane macromer, about 47% TRIS, and about 33.5% N,N-dimethylacrylamide. Fully hydrated contact lenses having this composition have a Dk of about 49 barrers, a water content of about 30 weight percent, and a modulus of elasticity of about 2.4 MPa.

EXAMPLE A-4

5 A contact lens is prepared substantially in accordance with the procedure described in Example A-2, but having the final composition of about 30 weight percent polysiloxane macromer, about 50% TRIS, and about 20% N,N-dimethylacrylamide. Fully hydrated contact lenses having this composition have a Dk of about 76 barrers, a water content of about 20 weight percent, and a modulus of elasticity of about 1.3 MPa.

EXAMPLE A-5

20 A contact lens is prepared substantially in accordance with the procedure described in Example A-2, but having the final composition of about 30 weight percent polysiloxane macromer, about 40% TRIS, and about 30% N,N-dimethylacrylamide. Fully hydrated contact lenses having this composition have a Dk of about 55 barrers, a water content of about 30 weight percent, and a modulus of elasticity of about 3.5 MPa.

EXAMPLE A-6

30 A contact lens is prepared substantially in accordance with the procedure described in Example A-2, but having the final composition of about 30 weight percent polysiloxane macromer, about 60% TRIS, and about 10% N,N-dimethylacrylamide. Fully hydrated contact lenses having this composition have a Dk of about 110 barrers, a water content of about 8.7 weight percent, and a modulus of elasticity of about 2.6 MPa.

EXAMPLE A-7

5 A contact lens is prepared substantially in accordance with the procedure described in Example A-2, but having the final composition of about 30 weight percent polysiloxane macromer and about 70% TRIS. Fully hydrated contact lenses having this composition have a Dk of about 128 barrers and a water content of about 4.9 weight percent.

EXAMPLE A-8

10 A contact lens is prepared substantially in accordance with the procedure described in Example A-2, but having the final composition of about 30 weight percent polysiloxane macromer, about 45% TRIS, 5% fluoroacrylate, and about 20% N,N-dimethylacrylamide. Fully hydrated contact lenses having this composition have a Dk of about 69 barrers, a water content of about 20 weight percent, and a modulus of elasticity of about 1.4 MPa.

EXAMPLE A-9

15 A contact lens is prepared substantially in accordance with the procedure described in Example A-2, but having the final composition of about 82 weight percent polysiloxane macromer, about 14.4% TRIS, and about 3.7% 2-hydroxyethyl methacrylate. Fully hydrated contact lenses having this composition have a Dk of about 96 barrers, a water content of about 19 weight percent, and a modulus of elasticity of about 1.8 MPa.

EXAMPLE A-10

20 A polysiloxane macromer is prepared substantially in accordance with the procedures described in Example A-1, but the polyethylene glycol has a molecular weight of about 660.

25 A contact lens is prepared substantially in accordance with the procedure described in Example 2, but having the final composition of about 81.9 weight percent polysiloxane macromer, about 13.6% TRIS, about 3.7% 2-hydroxyethyl methacrylate, and about 0.8%

ethylene glycol dimethacrylate. Fully hydrated contact lenses having this composition have a Dk of about 81 barrers, a water content of about 20 weight percent, and a modulus of elasticity of about 1.4 MPa.

5

EXAMPLE A-11

10

A contact lens is prepared substantially in accordance with the procedure described in Example A-2, but having the final composition of about 82 weight percent polysiloxane macromer, about 8.6% TRIS, about 4.9% fluoroacrylate, about 3.5% 2-hydroxyethyl methacrylate, and about 1% EDGMA. Fully hydrated contact lenses having this composition have a Dk of about 77 barrers, a water content of about 22 weight percent, and a modulus of elasticity of about 1.3 MPa.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183

decompressed with argon. This operation is repeated twice. The degassed siloxane is dissolved in 202ml of freshly distilled toluene kept under argon, and 100mg of dibutyltin dilaurate (DBTDL) are added. After complete homogenization of the solution, all the perfluoropolyether reacted with isophorone diisocyanate (IPDI) is added under argon. After stirring overnight at room temperature, the reaction is complete. The solvent is stripped off under a high vacuum at room temperature. Microtitration shows 0.36meq/g of hydroxyl groups (theory 0.37meq/g). 13.78g (88.9mmol) of 2-isocyanatoethyl methacrylate (IEM) are added under argon to 247g of the α,σ -hydroxypropyl-terminated polysiloxane-perfluoropolyether-polysiloxane three-block copolymer (a three-block copolymer on stoichiometric average, but other block lengths are also present). The mixture is stirred at room temperature for three days. Microtitration then no longer shows any isocyanate groups (detection limit 0.01meq/g). 0.34meq/g of methacryl groups are found (theory 0.34meq/g).

The macromer prepared in this way is completely colourless and clear. It can be stored in air at room temperature for several months in the absence of light without any change in molecular weight.

EXAMPLE B-2 Macromer synthesis

The first step of the macromer synthesis described under Example B-1 is repeated. An isocyanate titration of the perfluoropolyether reacted with IPDI gives a content of 1.33meq/g of NCO (theory 1.35meq/g).

In a second step, 87.1g of the α,σ -hydroxypropyl-terminated polydimethylsiloxane TegomerH-Si2111 (Th. Goldschmidt AG, Essen) having a mean molecular weight of 890g/mol (2.25meq/g of hydroxyl groups according to titration) are dissolved in 87ml of toluene. After the reaction has been carried out as indicated under B-1 and the solvent has been removed, a hydroxyl group content of 0.66meq/g is determined by microtitration (theory 0.60meq/g). The resultant intermediate is in turn reacted with a stoichiometric amount of isocyanatoethyl methacrylate. Microtitration then no longer shows any isocyanate groups (detection limit 0.01meq/g). 0.56meq/g of methacryl groups are found (theory 0.53meq/g). The macromer prepared in this way is completely colourless and clear and has a long shelf life.

EXAMPLE B-3 Macromer synthesis

The first step of the macromer synthesis described under Example B-1 is repeated, but using a different perfluoropolyether: Fomblin® ZDOLTX (from Ausimont S.p.A., Milan). This material is terminated by $\text{O-CF}_2\text{-CH}_2\text{-(OCH}_2\text{CH}_2\text{)}_n\text{-OH}$ (where $n = 0, 1$ or 2). The material used has a mean molecular weight of 1146g/mol, and contains 1.72meq/g of hydroxyl groups according to end-group analysis. An isocyanate titration of the perfluoropolyether reacted with IPDI shows a content of 1.23meq/g of NCO (theory 1.25meq/g).

In the second step, a stoichiometric amount of Tegomer Hi-Si2111 and toluene are again added. After the reaction has been carried out as indicated under Example B-1 and the solvent has been removed, a hydroxyl group content of 0.63meq/g is determined by microtitration (theory 0.58meq/g). The resultant intermediate is in turn reacted with a stoichiometric amount of isocyanatoethyl methacrylate. Microtitration then no longer shows any isocyanate groups (detection limit 0.01meq/g). 0.55meq/g of methacryl groups are found (theory 0.51meq/g). The macromer prepared in this way is completely colourless and clear and has a long shelf life.

EXAMPLE B-4 Macromer synthesis

The first step of the macromer synthesis described under Example B-1 is repeated, but 5.0 g of Fomblin/ZDOL and 2.18 g of IPDI are employed. When the reaction is complete, microtitration shows an isocyanate group content of 1.31meq/g of hydroxyl groups (theory 1.36 meq/g).

The second step of the synthesis described under Example B-1 is likewise carried out analogously, the stoichiometric ratio between isocyanate-terminated perfluoropolyether and hydroxypropyl-terminated polysiloxane being 2:3. After the reaction has been completed and the solvent has been removed, microtitration shows a content of 0.2meq/g of hydroxyl groups (theory 0.18meq/g).

The third step of the synthesis described under Example B-1 is likewise carried out analogously, IEM being employed in a precisely stoichiometric ratio. After the reaction, free isocyanate groups can no longer be detected (detection limit 0.01meq/g). 0.19meq/g of methacryl groups are found (theory 0.19meq/g).

EXAMPLE B-5 Production of contact lenses

13.0g of macromer from Example B-1 are dissolved in 5.6g of ethanol (Fluka, puriss. p.a.) (70% by weight solution). After complete homogenization of the solution, 5.2g of 3-tris(trimethylsiloxy)silylpropyl methacrylate (TRIS from Shin-Etsu, product No. KF-2801), 7.8g of freshly distilled dimethylacrylamide (DMA) and 160mg of photoinitiator Darocur® 1173 (Ciba) are added. This solution is filtered through a Teflon membrane having a pore width of 0.45mm under an argon pressure of from 1 to 2 atm. The filtered solution is frozen in a flask in liquid nitrogen, the flask is evacuated under a high vacuum, and the solution is returned to room temperature with the flask sealed. This degassing operation is repeated twice. The flask containing the macromer/comonomer solution is then transferred into a glove box with an inert-gas atmosphere, where the solution is pipetted into dust-free contact-lens moulds made from polypropylene. The moulds are closed, and the polymerization reaction is effected by UV irradiation (15mW/cm², 5min.), with simultaneous crosslinking. The moulds are then opened and placed in ethanol, causing the resultant lenses to swell out of the moulds. The lenses are extracted for 24 hours with constantly replenished distilled dichloromethane and subsequently dried in a high vacuum. The dried lenses are equilibrated in phosphate-buffered physiological

saline solution in autoclave-resistant vials and then autoclaved at 120°C for 30 minutes. All physical data measurements are carried out on autoclaved lenses.

The lenses produced in this way are characterized by the following values: oxygen permeability (Dk) 77 barrer (determined by the "wet" method described below), water content of the equilibrated lenses 32 percent by weight, elongation at break at 35°C 360%, modulus of elasticity 30°C 0.5MPa (measured using a Minimat from Polymer Laboratories, UK).

"Wet" measurement of the oxygen permeability:

The oxygen permeability of a material is determined by the coulometric method. To this end, pre-autoclaved lenses are clamped in a holder and then covered on the upper side with a 2cm layer of water. A gas mixture comprising 21% of oxygen and 79% of nitrogen is passed continuously through the water layer with swirling. The oxygen which diffuses through the lens is measured using a coulometric detector. The reference values are those measured on commercially available contact lenses using this method. Cibasoft/ (CIBA-Vision, HEMA lens) gives a measurement of approx. 7-10 barrer, and Excelens/ (CIBA-Vision, PVA lens) gives a measurement of approx. 22 barrer.

Unfortunately, the oxygen permeability of, for example, contact lenses is frequently given in the literature as a straight Dk value without further definition and frequently without giving any reference material. These are usually values determined on dry material (dry measurement). A comparative measurement of the oxygen permeability of polymer B-5 shows the differences:

- a) "wet" measurement: 77 barrer
- b) dry measurement: 158 barrer

EXAMPLE B-6

The process described under Example B-5 for the production of contact lenses is repeated, but the mixture of comonomers has the following composition (in per cent by weight):

- 55 % of macromer from Example B-1
- 22 % of TRIS
- 22.5 % of DMA
- 0.5 % of Blemer® QA

EXAMPLE B-7

The process described under Example B-5 for the production of contact lenses is repeated, but the mixture of comonomers has the following composition (in per cent by weight):

- 55 % of macromer from Example B-1
- 22 % of TRIS
- 23 % of DMA

EXAMPLE B-8

Analogously to EXAMPLE B-5 (in weight percent):

40 % of macromer from Example B-1

30 % of TRIS

30 % of DMA

EXAMPLE B-9

The process described under B-5 for the production of contact lenses is repeated, but a 70% by weight solution of the macromer in toluene is used instead of the 75% by weight solution in ethanol described above. The mixture of comonomers has the following composition (in per cent by weight):

55 % of macromer from Example B-1

22 % of TRIS

23 % of DMA

EXAMPLE B-10

The process described under B-5 for the production of contact lenses is repeated, but a 70% by weight solution of the macromer in octamethylcyclotetrasiloxane is used instead of the 75% by weight solution in ethanol described above. The mixture of comonomers has the following composition (in per cent by weight):

55 % of macromer from Example B-1

22 % of TRIS

23 % of DMA

Physical measurement data for the contact-lens materials from Examples B-5 to B-10 (O_2 Dk value, wet method) are presented in TABLE B-I:

TABLE B-I

Example	Water Content [%]	Dk [barrer]	Modulus of Elasticity [MPa]	Elongation at Break [%]
B-5	32	77	0.5	360
B-6	23.8	110	1.1	160
B-7	19.5	110	0.6	130
B-8	30.9	81	0.3	300
B-9	30			
B-10	25			

EXAMPLE B-11

About 10.0 grams of macromer from Example B-1 are dissolved in 3.3 grams of ethanol (Fluka, puriss. p.a.). After complete homogenization of the solution, about 4.0 grams of 3-tris(trimethylsiloxy)silylpropyl methacrylate (TRIS, from Shin-Etsu, product no. KF-2801), about 5.9 g. freshly distilled dimethylacrylamide (DMA), about 0.1 g. Blemer® QA (a methacrylate having quaternary ammonium substituents, Linz Chemie) and about 100 mg of photoinitiator Darocur® 1173 (Ciba) are added. The solution is filtered through a TEFLON membrane having a pore width of 0.45 mm under an argon pressure of from about 1 to 2 atm.

The filtered solution is frozen in a flask in liquid nitrogen, the flask is evacuated under a high vacuum, and the solution is returned to room temperature with the flask sealed. This degassing operation is repeated twice. The flask containing the macromer/comonomer solution is then transferred into a glove box with an inert gas atmosphere, where the solution is pipetted into dust-free, polypropylene contact lens molds. The molds are closed, and the polymerization reaction is effected by UV irradiation, with simultaneous crosslinking. The molds are then opened and placed in isopropyl alcohol, causing the resultant lenses to swell out of the molds. The lenses are extracted for about 24 hours with nearly continuous replenishing of isopropyl alcohol. Subsequently, the lenses are dried under high vacuum.

The dried contact lenses are equilibrated in autoclave-resistant vials in phosphate-buffered physiological saline solution, and then autoclaved for 30 minutes at about 120°C. Physical measurement data for the autoclaved lens is presented below:

5	Dk [barrer]:	93
	water content [%]:	20.3%
	modulus of elasticity [Mpa]:	0.96

10

EXAMPLE B-12

Lenses are prepared in accordance with the procedures described in Example B-11, but are subsequent surface treated as follows. The dried lenses are transferred into a plasma coating apparatus wherein they are surface treated in a methane/"air" mixture ("air", as used here, denotes 79% nitrogen and 21% oxygen) for a period of about 5 minutes. The apparatus and plasma treatment process have been disclosed by H. Yasuda in "Plasma Polymerization", Academic Press, Orlando, Florida (1985), pages 319 forward.

The plasma-treated contact lenses are equilibrated in autoclave-resistant vials in phosphate-buffered physiological saline solution, and then autoclaved for 30 minutes at about 120°C. Physical measurement data for the plasma-coated autoclaved lens is presented below:

20	Dk [barrer]:	88
	water content [%]:	21.8%
25	modulus of elasticity [Mpa]:	1.03

EXAMPLE B-13

Lenses are prepared in accordance with the procedures described in Example B-5, but the mixture of comonomers has the following composition, in weight percentages:

Macromer of Example B-1:	60%
TRIS:	25%
DMA:	15%

35

EXAMPLE B-14

Lenses are prepared in accordance with the procedures described in Example B-6, with the same comonomer composition, but the comonomers are dispensed into dust-free contact lens molds in ambient air atmosphere.

EXAMPLE C-1

Reaction of α,ω -bis-aminopropyl-dimethylpolysiloxane with D(+)-gluconic acid d-lactone:

Before the reaction, the amino-functionalized polydimethylsiloxane employed for the synthesis (X-22-161-C, Shin Etsu, JP) was finely dispersed in acetonitrile, extracted and then subjected to molecular distillation.

The following reactions take place with exclusion of H_2O . 200g of purified amino-functionalized polydimethylsiloxane (0.375meq of NH_2/g ; Mn(VPO) 3400-3900 (VPO, Vapour Pressure Osmometry)), dissolved in 200 ml of absolute THF, are slowly added dropwise to a suspension of 13.35g (75 mmol) of D(+)-gluconic acid d-lactone in 50ml of absolute THF and the mixture is stirred at $40^\circ C$ for about 24 hours until the lactone has reacted completely. (Monitoring of the reaction by thin layer chromatography (TLC): silica gel; i-propanol/ H_2O /ethyl acetate 6:3:1; staining with Ce(IV) sulfate/phosphoromolybdic acid solution (CPS reagent)). After the reaction, the reaction solution is concentrated to dryness and the residue is dried under 3 Pa (0.03 mbar) for 48 hours. 213.3 g of α,ω -bis(3-gluconamidopropyl)-poly-dimethylsiloxane are obtained. Titration of the amino groups with perchloric acid shows a conversion of the amino groups of more than 99.8%.

Reaction of α,ω -bis-3-gluconamidopropyl-dimethylpolysiloxane with IEM :

The product obtained above (213.3 g) is dissolved in 800 ml of absolute THF and the solution is heated to $40^\circ C$ with the addition of catalytic amounts of dibutyltin dilaurate (DBTDL). 14 g (90 mmol) of IEM in 20 ml of absolute THF are added dropwise to this solution over a period of about 4 hours. This corresponds to a concentration of 1.2 equivalents of IEM per gluconamide unit. The reaction is carried out in the course of 48 hours (monitoring of the reaction by IR spectroscopy detection of the NCO ties). The reaction solution is concentrated and the product is dried in a brown glass flask under 3 Pa (0.03mbar) for 24 hours, while cooling with ice. 227.2 g of a colourless rubber-elastic product of high optical transparency remain.

EXAMPLE C-2 to C-7

Further amino propyl-dimethylpolysiloxanes (PDMS) are reacted with a different amount of gluconolactone and concentrations of IEM analogously to Example C-1. The examples are summarized in Table C-I

TABLE C-I

Example	Poly(dimethyl siloxane) [PDMS]				Amount of batch		
	Name	Type	Mn	NH ₂ *	PDMS g(mmol of NH ₂)	Glu g (mmol)	IEM g (mmol)
C-1	X-22-161-C	term.	3400	2	200 (75)	13.4 (75)	14.0 (90.0)
C-2	X-22-161-C	term.	3400	2	200 (74)	13.4 (75)	25.7 (165.0)
C-3	X-22-161-C	term.	3400	2	200 (75)	13.4 (75)	29.2 (187.5)
C-4	PS 813	pen.	1200	1			
C-5	GP 4	pen.	3150	2.6			
C-6	GP 6	pen.	5960	3			
C-7	KF 8003	pen.	9700	4.7	200 (98)	17.5 (98)	18.2 (117.4)

Legend:

X-22-161-C and KF 8003 are products from Shin Etsu (Japan), PS813 is a product from Petrarch-H ls, GP4 and GP6 are products from Genesee.

* Amino groups per macromer chain

Glu:D(+) gluconic acid d-lactone

term: terminal

pen: pendent

EXAMPLE C-8

The reaction is carried out in accordance with Example C-1, but instead of D(+)gluconic acid d-lactone, 75mmol of lactobionic acid 1,5-lactone, suspended in 50 ml of absolute THF, are added dropwise to a solution of amino-functionalized polydimethylsiloxane (X-22-161-C) in 180 ml of absolute THF and 20 ml of DMSO (pure, 99%). Titration of the amino groups with perchloric acid indicates a reaction conversion of 99% (<0.01 meq of NH₂/g). Here also, a colourless optically clear macromer is obtained.

EXAMPLE C-9 and C-10

The reactions are carried out analogously to Example C-1. However, the catalyst necessary for addition of the isocyanate onto the hydroxyl groups is varied. Instead of DBTDL, catalytic amounts of 1,4-diazabicyclo[2.2.2]octane (DABCO) or 4-dimethylamino-pyridine (DMAP) are added and the reaction is continued as described under Example C-1. In both cases, an optically clear, colourless rubber-elastic macromer results in a manner corresponding to Example C-1.

EXAMPLE C-11

The reaction is carried out analogously to Example C-1. In a manner corresponding to Example C-8, 0.1 mol of lactobionic acid 1,5-lactone is suspended in 50 ml of absolute THF and the suspension is added dropwise to a solution of amino-functionalized polydimethylsiloxane (KF-8003) in 180 ml of absolute THF and 20 ml of DMSO (pure, 99%). The reaction time is increased to about 48 hours. A residual content of 0.07 meq of NH_2/g can be detected, and is reacted completely by addition of the corresponding molar amount of D(+)gluconic acid d-lactone to the reaction solution. The colourless highly transparent product has a residual content of amino groups of <0.01 meq/g.

EXAMPLE C-12

52.09 g (9.78 mmol) of purified amino-functionalized polydimethylsiloxane (X-22-161-C, Shin Etsu JP), dissolved in 110 ml of absolute THF, are initially introduced into the reaction vessel under an inert gas atmosphere, and 1.14g (6.52 mmol) of D-glucaro-1,4:6,3-dilactone, dissolved in 20 ml of absolute THF, are added. The reaction solution is stirred at room temperature for 15 hours and then worked up in a manner corresponding to Example C-1. The amine content is 0.134 meq/g. The terminal amino groups of the resulting penta-block macromer are reacted with gluconolactone in the following reaction step. 41.84 g (5.146 meq of NH_2) of the above macromer and 0.917g (5.15 mmol) of D(+)gluconic acid d-lactone are suspended in 300ml of absolute THF and the suspension is stirred under nitrogen at 40°C for 18 hours. The filtered solution is then concentrated and the residue is dried under 3 Pa (0.03mbar) for 48 hours. A highly viscous optically clear substance having a residual content of amino groups of 0.013 meq/g results.

EXAMPLE C-13

Preparation of an amino- and perfluoroalkyl-functionalized polydimethylsiloxane:

3.0 ml of absolute toluene are added to 15 g of poly(dimethylsiloxane-co-methylhydrosiloxane) [Bayer Silopren U-230; 10,000 g/mol; 2.3mmol of Si-H/g], and 1.72 g (9.2mmol) of allylphthalimide [CAS Reg. No. 5428-09-1] are then added. The mixture is frozen several times and the flask evacuated and then brought to room temperature again. The flask is then let down with argon. 0.7ml of a 0.005 molar solution of Lamoreaux catalyst (prepared in accordance with US3,220,972, General Electric) in absolute toluene (100ppm of Pt/mol of Si-H) is added and the mixture is heated to 80°C. After a reaction time of half an hour, a colourless, clear to slightly cloudy solution, the ¹H-NMR spectrum of which no longer shows resonances of allylic hydrogen atoms, is obtained.

Thereafter, 6.2 g (15.3 mmol) of degassed allyl 1H,1H,2H,2H-perfluorooctyl ether are slowly added and the mixture is stirred at 80°C for 2 hours. A ¹H-NMR spectrum now shows a severely weakened resonance of the Si-H function at 4.6ppm and an intense resonance at 0.5 ppm, which originates from Si-CH₂ hydrogen atoms.

3.0 ml of 1-hexene are then added in order to react the remaining excess of Si-H groups, which could otherwise cause crosslinking of the polymer when air later has access. The mixture is further stirred at 80°C for another half an hour. The reaction mixture is then left to stand overnight. The product is purified over a silica gel column with hexane/ethyl acetate (3:2), the solvent is stripped off and the macromer is dried under a high vacuum. A colourless, clear, viscous product is obtained. The macromer purified in this way is taken up in 20 ml of hexane, 20 ml of methylamine [33% in ethanol] are added and the mixture is heated to 40°C. After 10-15 minutes, a white voluminous precipitate separates out. After 30 minutes, the suspension is cooled and filtered and the precipitate is washed with a little hexane. The filtrate is evaporated and the residue is then dried under a high vacuum. Thereafter, the content of amino groups is determined by titrimetry (perchloric acid).

The resulting macromer is clear and viscous. The amino group content is 78.6% of theory. The total yield of macromer after the chromatographic purification is 75%.

Preparation of a gluconamide:

17.3 g (corresponding to an amine content of 5.4 meq) of this aminoalkyl-substituted product are dissolved in 20 ml of dried THF. The solution is repeatedly frozen, degassed and let down with argon. All the following operations are carried out in an argon atmosphere. 712 mg of D(+)-gluconic acid d-lactone (4mmol) are then added. Because of the low solubility of the lactone, a suspension is initially obtained. After stirring overnight at 50°C, the solution is clear and the lactone has been used completely. The stoichiometric remaining amount of D(+)-gluconic acid d-lactone (260mg, 1.46mmol) is then added and the mixture is stirred again at 50°C overnight. A trace of unreacted lactone is observed. Completion of the reaction is monitored by means of thin layer chromatography on silica gel plates with the mobile phase 1-propanol/ethyl acetate/water (6:1:3). The silica gel plates are developed by means of Ce(IV) sulfate/phosphoromolybdic acid solution. Subsequent titration on amino groups yields a residual

amino content of < 0.1%. After filtration and removal of the solvent by distillation, a highly viscous clear macromer with 0.295 mequivalent of gluconamide per gram of macromer is obtained.

EXAMPLE C-14

Before the polymerization, the acrylates employed, isobutyl acrylate (IBA), N,N-dimethylacrylamide (DMA) and 3-methacryloyloxypropyl-tris(trimethylsilyloxy)silane (TRIS) are each freed from inhibitors by distillation. 0.32g (2.76mmol) of IBA, 0.80g (8.1mmol) of DMA and 1.44g (3.4mmol) of TRIS are weighed into a 50ml round-bottomed flask and the flask is flushed with N₂ for half an hour, while cooling with ice. 1.44g of macromer from Example C-1 are transferred to a round-bottomed flask with a nitrogen attachment, degassed under 3 Pa (0.03mbar) for 24 hours and then dissolved in 2.7 g of ethanol which has been flushed with N₂ for half an hour beforehand. The subsequent preparation of samples and the polymerization are carried out inside a glove box with exclusion of oxygen. The above monomer mixture and the macromer solution from Example C-1 are mixed, with the addition of 0.012g (0.21mmol) of Darocur® 1173 and the mixture is subjected to microfiltration (0.45 mm filter). 180 µl of this mixture are introduced into a polypropylene mould, which is then closed with an appropriate lid of polypropylene. The mixture is then irradiated with a UV-A mercury high pressure lamp in a nitrogen atmosphere in a UV oven equipped for this for 5 minutes. The lamps (5 each of the brand TLK40W/10R, Philips) are above and below the holder inserted. The irradiation intensity is 14.5mW/cm².

The polypropylene mould is opened and the finished discs or lenses are removed by soaking by means of a solvent mixture of methylene chloride and ethanol (2:3). The lenses and discs are extracted in ethanol at room temperature in special polypropylene cages for 48 hours and then dried at 40°C under 10Pa (0.1mbar) for 24 hours (autoclaving at 120°C, 30 minutes). The discs show an E modulus of 1.1MPa, a permeability to oxygen of 183 barrier and a hardness (Shore A) of 53.

EXAMPLE C-15 to C-19

Further polymers are prepared in a manner corresponding to Example C-14 (composition in percentages by weight). Table C-II shows examples C-15 to C-19 and the properties of the resulting materials measured on discs.

TABLE C-II

Example	Water Content [%]	Macromer from Example	Macromer weight percent	DMA weight percent	DMEA weight percent	TRIS weight percent	E modulus [Mpa]	Dk [barrer]
C-15	not measured	C-3	32.8	-	30	37.2	-	-
C-16	19.9	C-3	32.9	34.3	-	32.7	0.7	84
C-17	25.1	C-3	39.3	34.3	-	36.4	0.9	72
C-18	17.5	C-3	35.7	34.3	-	30.0	0.7	100
C-19	23.4	C-3	33.3	33.3	-	33.4	0.7	96

Legend:

DMA: N,N-Dimethylacrylamide

TRIS: 3-Methacryloyloxypropyl-tris(trimethylsilyloxy)silane

DMEA: 2-Dimethylaminoethyl acrylate

EXAMPLE C-20
Uncoated contact lens

A contact lens is prepared in a manner corresponding to Example C-14, using the Example C-3 macromer, with the following composition in percentages by weight:

Macromer: 33.3
 DMA: 33.3
 TRIS: 33.4

The lens has a Dk of about 94 and a water content of about 20.0 weight percent. The results are presented in TABLE C-III for comparison with coated lens properties.

EXAMPLE C-21

Plasma-treated contact lens

Dried lenses prepared in accordance with the procedures described in Example C-20 are transferred into a plasma coating apparatus where the lenses are surface treated in a methane/"air" mixture ("air", as used here, denotes 79% nitrogen and 21% oxygen). The apparatus and plasma treatment process have been disclosed by H. Yasuda in "Plasma Polymerization", Academic Press, Orlando, Florida (1985), pages 319 forward.

The dried plasma-treated contact lenses are equilibrated in autoclave-resistant vials in phosphate-buffered physiological saline solution, and then autoclaved for 30 minutes at about 120°C. The plasma-treated autoclaved lens has a Dk [barrer] of 90 and a water content of 21.5%. The results are presented in TABLE C-III for comparison with coated lens properties.

TABLE C-III

Example	Surface type	Dk [barrer]	Water content [%]
C-20	untreated	94	20.0
C-21	plasma-treated	90	21.5

EXAMPLE C-22

The synthesis of this polymer corresponds to Example C-14 with the following comonomer composition: Example C-3 macromer/TRIS/DMA: 32.8%/32.6%/34.2% (in percentages by weight) and an addition of 0.4% by weight of trimethylammonium-2-hydroxypropyl methacrylate hydrochloride (Blemer® QA, Nippon Oil Corp.). The polymer has a modulus of 0.9MPa and a permeability to oxygen of 2 barrier. The water content is 25.1% (after 30 minutes' autoclaving at 120°C). For comparison, Example C-16 has a water content of 20% with a very similar comonomer composition (no addition of Blemer® QA).

EXAMPLE C-23

The polymer is prepared analogously to Example C-14, but the polymerization is carried out in bulk, which means without addition of ethanol. The composition of the comonomers and the material properties of the polymer synthesized, measured on discs is given below.

Example C-7 macromer: 41%
 IBA: 23%
 1-vinyl-2-pyrrolidone (NVP): 24%
 acrylonitrile (AN): 12%

Hardness (shore A): 68

EXAMPLE C-24

The polymerization is carried out in accordance with Example C-14 but with the following changed comonomer composition:

macromer of Example C-7/IBA/TRIS 20%/19%/60% and 1% (in percentages by weight) of bis(3-methacryloyloxypropyl)tetra methylsiloxane.

An optically clear polymer with an E modulus of 0.4MPa, a permeability to oxygen of 241 barrier and a hardness (Shore A) of 42 is obtained.

EXAMPLES C-25 through C-27

Contact lenses are prepared in accordance with the procedure described in Example C-14. The compositions in weight percentages are as follows:

Example	Macromer	Macromer weight percent	IBA weight percent	DMA weight percent	TRIS weight percent	HFBA weight percent
C-25	C-3	36.0	8.0	20.0	36.0	-
C-26	C-2	35.0	5.0	20.0	35.0	5.0
C-27	C-3	32.8	-	30.0	37.2	-

where IBA is isobutylacrylate,

DMA is N,N-Dimethylacrylamide

TRIS is 3-methacryloyloxypropyl-tris(trimethylsiloxy) silane

HFBA is acrylsäure-2,2-3,4,4,4-hexafluorbutylester

EXAMPLE C-28

The polymerization is carried out in accordance with Example C-14 but with the following changed comonomer composition: macromer of Example C-1/DMA/TRIS 33.3% / 33.3% / 33.3%. An optically clear polymer is obtained.

EXAMPLE D-1 Macromer Synthesis

5 In a dry box under nitrogen atmosphere, about 200 grams of dry PDMS dipropoxyethanol (Shin-Etsu) is added to a container. Isocyanatoethyl methacrylate (IEM) in an amount equal to about 2 moles per mole PDMS dialkanol is added to the container. About 0.1 weight percent dibutyltin dilaurate (DBTL) catalyst, based on PDMS dialkanol weight, is added to the container along with a stir bar. The container is immersed in an oil bath atop a stir plate, and secured in
10 place with a clamp. A stream of UPC air at about 2 psig is passed over the mixture. The mixture is agitated at room temperature (about 22°C) for about 24 hours. An iterative procedure follows in which the mixture is analyzed for isocyanate content and IEM is added if the PDMS dialkoxyalkanol has not been completely reacted. The mixture is stirred about 24 hours more. The macromer produced is a siloxane-containing macromer.

EXAMPLE D-2 Lens fabrication

15 A prepolymerization mixture is prepared by mixing about 56 grams of the macromer from Example D-1, about 14 grams of TRIS, about 29 grams N,N-dimethylacrylamide (DMA), about 1 gram methacrylic acid, about 0.5 grams Darocur® 1173 photoinitiator, and about 20
20 grams hexanol. The mixture is agitated for about 20 minutes at room temperature.

25 Next, the mixture is degassed via a series of freezing and thawing steps. The container is placed in a liquid nitrogen bath until the mixture solidifies. A vacuum is applied to the container at a pressure of about 200 millitorr or less for about 5 minutes. Then, the container is placed in a bath of room temperature water until the mixture is liquid again. This process is performed a total of three times.

30 The mixture is then polymerized to form contact lenses. The prepolymerization mixture is poured into polypropylene contact lens molds in a nitrogen atmosphere. The polymerization is effected by applying UV radiation (about 4-6 mW/cm²) for a period of about 15 minutes.

35 The resulting fully hydrated contact lens has a water content of about 23%. The lens has a Dk of about 115 barrers and a modulus of elasticity of about 2 MPa.

EXAMPLE D-3

Lens fabrication

A contact lens is prepared in accordance with the procedure described in Example D-2, with the difference being that the composition is about 50% macromer of Example D-1, about 20% TRIS and about 30% DMA.

The resulting fully hydrated contact lens has a water content of about 20%. The lens has a Dk of about 118 barrers and a modulus of elasticity of about 1.8 Mpa.

EXAMPLE E-1

Material A

A contact lens is prepared substantially in accordance with the procedure described in Example A-2. Prior to polymerization, the prepolymerization mixture is degassed by cooling the prepolymer mixture with liquid nitrogen until the mixture solidifies and is near liquid nitrogen temperature, then applying a vacuum (about 0.1 mm Hg) to the solidified prepolymer mixture, discontinuing the vacuum, and thawing the prepolymer mixture until the mixture is again in liquid form. This degassing procedure is performed a total of three times on the prepolymerization mixture.

The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. The cured lens has an equilibrium water content of about 19%. Subsequent to curing, the lens is plasma treated for about 10 minutes in an atmosphere of methane and air at a 2:1 CH₄:air volume:volume ratio. The working pressure of the gas is about 50 millitorr. The plasma treatment is accomplished in a Plasma Polymerization Apparatus LCVD-20-400A (Plasmacarb, Bedford, Massachusetts).

The Ionoton Ion Permeability Coefficient of the lens is $0.81 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens moves on the human eye. See Table E for a summary of the results.

EXAMPLE E-2

Material B

5 A contact lens is prepared substantially in accordance with the procedure described in Example B-10. Prior to polymerization, nitrogen gas is bubbled through the prepolymer mixture in order to remove oxygen from the prepolymer mixture.

10 The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. The cured lens has an equilibrium water content of about 26 weight percent. No coating is applied to the surface.

15 The Ionoton Ion Permeability Coefficient of the lens is $-0.063 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens does not move on the human eye. See Table E for a summary of the results.

EXAMPLE E-3

Material B

20 A contact lens is prepared substantially in accordance with the procedure described in Example B-12. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

25 The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. The cured lens has an equilibrium water content of about 30 weight percent. Subsequent to curing, the lens is plasma treated for about 3 minutes in an atmosphere of methane and air at a 2:1 CH_4 :air volume ratio.

30 The Ionoton Ion Permeability Coefficient of the lens is $0.50 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens moves on the human eye. See Table E for a summary of the results.

EXAMPLE E-4

Material B

A contact lens is prepared substantially in accordance with the procedure described in Example B-12. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. The cured lens has an equilibrium water content of about 30 weight percent. Subsequent to curing, the lens is plasma treated for about 5 minutes in an atmosphere of methane and air at a 2:1 CH₄:air volume ratio.

The Ionoton Ion Permeability Coefficient of the lens is $0.47 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens moves on the human eye. See Table E for a summary of the results.

EXAMPLE E-5

Material B

A contact lens is prepared substantially in accordance with the procedure described in Example B-12. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. The cured lens has an equilibrium water content of about 30 weight percent. Subsequent to curing, the lens is plasma treated for about 7.5 minutes in an atmosphere of methane and air at a 2:1 CH₄:air volume ratio.

The Ionoton Ion Permeability Coefficient of the lens is $0.35 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens moves on the human eye. See Table E for a summary of the results.

EXAMPLE E-6

Material B

A contact lens is prepared substantially in accordance with the procedure described in Example B-11. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. The cured lens has an equilibrium water content of about 30 weight percent. The lens is not subsequently coated.

The Ionoton Ion Permeability Coefficient of the lens is $1.1 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens moves on the human eye. See Table E for a summary of the results.

EXAMPLE E-7

Material C

A contact lens is prepared substantially in accordance with the procedure described in Example C-21. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. Subsequent to curing, the lens is plasma treated for about 5 minutes in an atmosphere of methane and air at a 2:1 CH_4 :air volume ratio.

The Ionoton Ion Permeability Coefficient of the lens is $2.9 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens moves on the human eye. See Table E for a summary of the results.

EXAMPLE E-8

Material C

5 A contact lens is prepared substantially in accordance with the procedure described in Example C-21. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

10 The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. Subsequent to curing, the lens is plasma treated for about 7.5 minutes in an atmosphere of methane and air at a 2:1 CH₄:air volume ratio.

15 The Ionoton Ion Permeability Coefficient of the lens is $0.25 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens moves on the human eye. See Table E for a summary of the results.

EXAMPLE E-9

Material C

20 A contact lens is prepared substantially in accordance with the procedure described in Example C-20. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

25 The prepolymer mixture is cured in an air atmosphere to form the contact lens. Subsequent to curing, the lens is not surface treated.

The Ionoton Ion Permeability Coefficient of the lens is $0.008 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens does not move on the human eye. See Table E for a summary of the results.

EXAMPLE E-10

Material D

30 A contact lens is prepared substantially in accordance with the procedure described in Example D-2. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. Subsequent to curing, the lens is not surface treated.

The Ionoton Ion Permeability Coefficient of the lens is $1.4 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens moves on the human eye. See Table E for a summary of the results.

EXAMPLE E-11

Material D

A contact lens is prepared substantially in accordance with the procedure described in Example D-2. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. Subsequent to curing, the lens is plasma treated for about 7.5 minutes in an atmosphere of methane and air at a 2:1 CH_4 :air volume ratio.

The Ionoton Ion Permeability Coefficient of the lens is $0.61 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens moves on the human eye. See Table E for a summary of the results.

EXAMPLE E-12

Material D

A contact lens is prepared substantially in accordance with the procedure described in Example D-2. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

The prepolymer mixture is cured in a nitrogen atmosphere to form the contact lens. Subsequent to curing, the lens is plasma treated for about 5 minutes in an atmosphere of methane and air at a 2:1 CH_4 :air volume ratio.

The Ionoton Ion Permeability Coefficient of the lens is $1.5 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens moves on the human eye. See Table E-I for a summary of the results.

EXAMPLE E-13

Material D

5 A contact lens is prepared substantially in accordance with the procedure described in Example D-2. Prior to polymerization, the prepolymerization mixture is degassed by the repeated freeze/thaw procedure of Example E-1.

10 The prepolymer mixture is cured in an air atmosphere to form the contact lens. Subsequent to curing, the lens is not surface treated.

 The Ionoton Ion Permeability Coefficient of the lens is $-0.001 \times 10^{-3} \text{ cm}^2/\text{sec}$. Clinical examination shows that the lens does not move on the human eye. See Table E for a summary of the results.

TABLE E

Example	Material	Degassing	Curing atmosphere	Surface treatment CH₄:air plasma [minutes]	Ionoton Ion Permeability Coefficient [10⁻³ cm²/sec]	On-eye Movement
E-1	A	3-cycle freeze/thaw	nitrogen	10	0.81	YES
E-2	B	nitrogen bubble	nitrogen	no plasma	-0.063	NO
E-3	B	3-cycle freeze/thaw	nitrogen	3	0.50	YES
E-4	B	3-cycle freeze/thaw	nitrogen	5	0.47	YES
E-5	B	3-cycle freeze/thaw	nitrogen	7.5	0.35	YES
E-6	B	3-cycle freeze/thaw	nitrogen	no plasma	1.1	YES
E-7	C	3-cycle freeze/thaw	nitrogen	5	2.9	YES
E-8	C	3-cycle freeze/thaw	nitrogen	7.5	0.25	YES
E-9	C	3-cycle freeze/thaw	air	no plasma	0.008	NO
E-10	D	3-cycle freeze/thaw	nitrogen	no plasma	1.4	YES
E-11	D	3-cycle freeze/thaw	nitrogen	7.5	0.61	YES
E-12	D	3-cycle freeze/thaw	nitrogen	5	1.5	YES
E-13	D	3-cycle freeze/thaw	air	no plasma	-0.001	NO

Considering Examples E-1 through E-13 of Table E, the lowest value of Ionoton Ion Permeability Coefficient for which a lens moves on the eye is $0.25 \times 10^{-3} \text{ cm}^2/\text{sec}$. The highest value of Ionoton Ion Permeability Coefficient for a lens which bound on the eye is $0.008 \times 10^{-3} \text{ cm}^2/\text{sec}$. Thus, a contact lens preferably has an Ionoton Ion Permeability Coefficient greater than about is $0.008 \times 10^{-3} \text{ cm}^2/\text{sec}$., more preferably greater than about $0.25 \times 10^{-3} \text{ cm}^2/\text{sec}$.

EXAMPLE F-1

Material C

A contact lens is prepared substantially in accordance with the procedure described in Example C-25. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $0 \text{ mm}^2/\text{min}$.

Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone (PVP) in accordance with the following procedure, using a glass plasma reactor equipped with an external ring electrode and a 27.13 MHz radio frequency (RF) generator for the generation of an inductively-coupled, cold glow discharge plasma. Highly purified argon is used as a plasma gas and as a carrier gas for N-vinylpyrrolidone (NVP) monomer feed. The NVP feed line is located about 10 cm below the glow zone.

The contact lens is placed in the 20 cm diameter plasma reactor at a position about 15 cm below the plasma glow zone. The reactor is then evacuated for about 30 minutes to about 0.009 mbar. Subquent to evacuation, the plasma gas flow is set to 20 sccm (standard cubic centimeters), the glow discharge is started at a pressure of about 0.15 mbar and maintained for about one minute at a power of about 170 Watts (in order to clean and activate the lens surface). After reduction of argon plasma gas flow to about 10 sccm, the argon carrier gas flow for the NVP monomer is also set to 10 sccm. The temperature of the NVP source (with the carrier gas bubbling through the liquid NVP) is held at about 40°C . The lenses are treated for about 10 minutes with a pulsing glow discharge plasma (1 μsec . on, 3 μsec . off) at about 0.35 mbar pressure and about 150 Watts power.

After interrupting the glow discharge and the carrier gas flow, the reactor is continuously purged with a 20 sccm argon stream at a pressure of about 0.009 mbar for about 30 minutes, in order to remove residual monomer and activated species. The PVP coated contact lenses thus

produced are highly wettable and show the following contact dynamic contact angles, measured with a KRUESS (Hamburg, Germany) K-12 instrument:

	Untreated	Treated
Advancing	102	38
Receding	48	23
Hysteresis	53	15

5

Clinical tests show that the lens does not move on the eye. See Table F for a summary of the results.

EXAMPLE F-2

Material C

A contact lens is prepared substantially in accordance with the procedure described in Example C-26. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $2.8 \times 10^{-7} \text{ mm}^2/\text{min}$.

Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens does not move on the eye. See Table F for a summary of the results.

EXAMPLE F-3

Material C

A contact lens is prepared substantially in accordance with the procedure described in Example C-27. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $9.3 \times 10^{-7} \text{ mm}^2/\text{min}$.

Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens does not move on the eye. See Table F for a summary of the results.

EXAMPLE F-4

Material C

5 A contact lens is prepared substantially in accordance with the procedure described in Example C-18. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $2.6 \times 10^{-6} \text{ mm}^2/\text{min}$.

10 Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens moves on the eye. See Table F for a summary of the results.

EXAMPLE F-5

Material C

15 A contact lens is prepared substantially in accordance with the procedure described in Example C-16. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $1.3 \times 10^{-5} \text{ mm}^2/\text{min}$.

20 Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens moves on the eye. See Table F for a summary of the results.

EXAMPLE F-6

Material C

25 A contact lens is prepared substantially in accordance with the procedure described in Example C-19. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $2.7 \times 10^{-5} \text{ mm}^2/\text{min}$.

30 Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens moves on the eye. See Table F for a summary of the results.

EXAMPLE F-7

Material C

5 A contact lens is prepared substantially in accordance with the procedure described in Example C-17. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $7.8 \times 10^{-6} \text{ mm}^2/\text{min}$.

10 Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens moves on the eye. See Table F for a summary of the results.

EXAMPLE F-8

Material B

15 A contact lens is prepared substantially in accordance with the procedure described in Example B-13. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $1.5 \times 10^{-6} \text{ mm}^2/\text{min}$.

20 Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens does not move on the eye. See Table F for a summary of the results.

EXAMPLE F-9

Material B

25 A contact lens is prepared substantially in accordance with the procedure described in Example B-14. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $1.1 \times 10^{-6} \text{ mm}^2/\text{min}$.

30 Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens does not move on the eye. See Table F for a summary of the results.

EXAMPLE F-10

Material B

5 A contact lens is prepared substantially in accordance with the procedure described in Example B-7. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $3.8 \times 10^{-6} \text{ mm}^2/\text{min}$.

10 Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens moves on the eye. See Table F for a summary of the results.

EXAMPLE F-11

Material B

15 A contact lens is prepared substantially in accordance with the procedure described in Example B-6. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $8.5 \times 10^{-6} \text{ mm}^2/\text{min}$.

20 Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens moves on the eye. See Table F for a summary of the results.

EXAMPLE F-12

Material B

25 A contact lens is prepared substantially in accordance with the procedure described in Example B-5. Prior to surface treatment, the Ionoflux Ion Permeability Coefficient is determined to be about $7.1 \times 10^{-5} \text{ mm}^2/\text{min}$.

30 Subsequent to ion permeability measurements, the lens surface is coated with polyvinylpyrrolidone as in Example F-1. Clinical tests show that the lens moves on the eye. See Table F for a summary of the results.

TABLE F

EXAMPLE	MATERIAL (Example reference number)	IONOFLUX ION PERMEABILITY COEFFICIENT* [mm ² /min]	ON-EYE MOVEMENT - CLINICAL DETERMINATION
F-1	C-25	0	NO
F-2	C-26	0.28×10^{-6}	NO
F-3	C-27	0.93×10^{-6}	NO
F-4	C-18	2.6×10^{-6}	YES
F-5	C-16	13.0×10^{-6}	YES
F-6	C-19	27.0×10^{-6}	YES
F-7	C-17	7.8×10^{-6}	YES
F-8	B-13	1.5×10^{-6}	NO
F-9	B-14	1.1×10^{-6}	NO
F-10	B-7	3.8×10^{-6}	YES
F-11	B-6	8.5×10^{-6}	YES
F-12	B-5	71.0×10^{-6}	YES

* All Ionoflux Ion Permeability Coefficients were determined on uncoated lenses.

Considering only Examples F-1 through F-13 of Table F, the lowest value of Ionoflux Ion Permeability Coefficient for which a lens moves on the eye is 2.6×10^{-6} mm²/min. The highest value of Ionoflux Ion Permeability Coefficient for a lens which binds on the eye is 1.5×10^{-6} mm²/min. Thus, a contact lens preferably has an Ionoflux Ion Permeability Coefficient greater than about 1.5×10^{-6} mm²/min., more preferably greater than about 2.6×10^{-6} mm²/min.

EXAMPLE G-1

A contact lens is prepared substantially in accordance with the procedure described in Example A-2. The Hydrodell Water Permeability Coefficient is determined to be about 0.71×10^{-6} cm²/second. Clinical tests show that the lens moves on the eye. See Table G for a summary of the results.

EXAMPLE G-2

5 A contact lens is prepared substantially in accordance with the procedure described in Example B-5. The Hydrodell Water Permeability Coefficient is determined to be about $1.09 \times 10^{-6} \text{ cm}^2/\text{second}$. Clinical tests show that the lens moves on the eye. See Table G for a summary of the results.

EXAMPLE G-3

10 A contact lens is prepared substantially in accordance with the procedure described in Example B-6. The lens is surface treated in a plasma gas in accordance with the procedure described in Example F-1. The Hydrodell Water Permeability Coefficient is determined to be about $0.27 \times 10^{-6} \text{ cm}^2/\text{second}$. Clinical tests show that the lens moves on the eye. See Table G for a summary of the results.

EXAMPLE G-4

15 A contact lens is prepared substantially in accordance with the procedure described in Example C-19. The lens is surface treated in a plasma gas in accordance with the procedure described in Example F-1. The Hydrodell Water Permeability Coefficient is determined to be about $0.37 \times 10^{-6} \text{ cm}^2/\text{second}$. Clinical tests show that the lens moves on the eye. See Table G for a summary of the results.

EXAMPLE G-5

20 A contact lens is prepared substantially in accordance with the procedure described in Example D-2. The Hydrodell Water Permeability Coefficient is determined to be about $1.26 \times 10^{-6} \text{ cm}^2/\text{second}$. Clinical tests show that the lens moves on the eye. See Table G for a summary of the results.

EXAMPLE G-6

25 A contact lens is prepared substantially in accordance with the procedure described in Example C-14. The Hydrodell Water Permeability Coefficient is determined to be about $0.08 \times 10^{-6} \text{ cm}^2/\text{second}$. Clinical tests show that the lens does not move on the eye. See Table G for a summary of the results.

TABLE G

EXAMPLE	MATERIAL (Example reference number)	SURFACE TREATMENT	HYDRODELL WATER PERMEABILITY COEFFICIENT [cm ² /sec.]	ON-EYE MOVEMENT - CLINICAL DETERMINATION
G-1	A-2	none	0.71×10^{-6}	YES
G-2	B-5	none	1.09×10^{-6}	YES
G-3	B-6	PVP	0.27×10^{-6}	YES
G-4	C-19	PVP	0.37×10^{-6}	YES
G-5	D-2	none	1.26×10^{-6}	YES
G-6	C-14	none	0.08×10^{-6}	NO

Considering only Examples G-1 through G-6 of Table G, the lowest value of Hydrodell Water Permeability Coefficient for which a lens moves on the eye is 0.27×10^{-6} cm²/sec. The highest value of of Hydrodell Water Permeability Coefficient for a lens which binds on the eye is 0.08×10^{-6} cm²/sec. Thus, a contact lens preferably has a Hydrodell Water Permeability Coefficient greater than about 0.08×10^{-6} cm²/sec., more preferably greater than 0.27×10^{-6} cm²/sec.

The invention has been described in detail, with reference to certain preferred embodiments, in order to enable the reader to practice the invention without undue experimentation. Theories of operation have been offered to better enable the reader to understand the invention, but such theories do not limit the scope of the invention. In addition, a person having ordinary skill in the art will readily recognize that many of the previous components, compositions, and parameters may be varied or modified to a reasonable extent without departing from the scope and spirit of the invention. Furthermore, titles, headings, example materials or the like are provided to enhance the reader's comprehension of this document, and should not be read as limiting the scope of the present invention. Accordingly, the intellectual property rights to the invention are defined by the following claims, reasonable extensions and equivalents thereof, as interpreted in view of the disclosure herein.

CLAIMS

That which is claimed is:

5 1. An ophthalmic lens having ophthalmically compatible inner and outer surfaces, said lens being suited to extended periods of wear in continuous, intimate contact with ocular tissue and ocular fluids, said lens comprising a polymeric material which has a high oxygen permeability and a high ion permeability, said polymeric material being formed from polymerizable materials comprising:

10 (a) at least one oxypem polymerizable material and

(b) at least one ionoperm polymerizable material,

wherein said lens allows oxygen permeation in an amount sufficient to maintain corneal health and wearer comfort during a period of extended, continuous contact with ocular tissue and ocular fluids, and

15 wherein said lens allows ion or water permeation in an amount sufficient to enable the lens to move on the eye such that corneal health is not substantially harmed and wearer comfort is acceptable during a period of extended, continuous contact with ocular tissue and ocular fluids.

20 2. An ophthalmic lens of claim 1, wherein said ophthalmic lens is selected from the group consisting of contact lenses for vision correction, contact lenses for eye color modification, ophthalmic drug delivery devices, and ophthalmic wound healing devices.

3. An ophthalmic lens of claim 2, wherein said ophthalmic lens is a contact lens.

4. An ophthalmic lens of claim 1, wherein said ophthalmic lens has an oxygen transmissibility of at least about 70 barrers/mm.

5 5. An ophthalmic lens of claim 4, wherein said ophthalmic lens has an oxygen transmissibility of at least about 75 barrers/mm.

6. An ophthalmic lens of claim 5, wherein said ophthalmic lens has an oxygen transmissibility of at least about 87 barrers/mm.

7. An ophthalmic lens of claim 1, wherein said polymeric material comprises an ionoperm phase which extends continuously from the inner surface of the ophthalmic lens to the outer surface of the ophthalmic lens.

8. An ophthalmic lens of claim 1, wherein said polymeric material comprises an oxyperm phase which extends continuously from the inner surface of the ophthalmic lens to the outer surface of the ophthalmic lens.

9. An ophthalmic lens of claim 1, wherein said polymeric material comprises a plurality of continuous phases, including at least one oxyperm phase which extends continuously from the inner surface of the ophthalmic lens to the outer surface of the ophthalmic lens and at least one

ionoperm phase which extends continuously from the inner surface of the ophthalmic lens to the outer surface of the ophthalmic lens.

10. An ophthalmic lens of claim 1, wherein said polymeric material comprises at least one ion or water pathway which extends continuously from the inner surface of the ophthalmic lens to the outer surface of the ophthalmic lens.

11. An ophthalmic lens of claim 1, wherein said polymeric material comprises at least one oxygen pathway which extends continuously from the inner surface of the ophthalmic lens to the outer surface of the ophthalmic lens.

12. An ophthalmic lens of claim 1, wherein said polymeric material comprises a plurality of co-continuous pathways, at least one being an ion or water pathway and at least one other being an oxygen pathway, which pathways extend continuously from the inner surface of the lens to the outer surface of the lens.

13. An ophthalmic lens of claim 12, wherein said co-continuous pathways include a continuous phase of ionoperm polymeric material and a continuous phase of siloxane-containing polymeric material.

14. An ophthalmic lens of claim 12, wherein said pathways have a domain size which is less than a size which undesirably distorts visible light in an amount which is visible to the eye of the wearer.

15. An ophthalmic lens of claim 1, wherein said lens has an Ionoton Ion Permeability Coefficient of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{sec}$.

16. An ophthalmic lens of claim 15, wherein said lens has an an Ionoton Ion Permeability Coefficient of greater than about $0.3 \times 10^{-6} \text{ cm}^2/\text{sec}$.

17. An ophthalmic lens of claim 16, wherein said lens has an an Ionoton Ion Permeability Coefficient of greater than about $0.4 \times 10^{-6} \text{ cm}^2/\text{sec}$.

18. An ophthalmic lens of claim 1, wherein said lens has an Ionoflux Diffusion Coefficient of greater than about $1.5 \times 10^{-6} \text{ mm}^2/\text{min}$.

19. An ophthalmic lens of claim 18, wherein said lens has an Ionoflux Diffusion Coefficient of greater than about $2.6 \times 10^{-6} \text{ mm}^2/\text{min}$.

20. An ophthalmic lens of claim 19, wherein said lens has an Ionoflux Diffusion Coefficient of greater than about $6.4 \times 10^{-6} \text{ mm}^2/\text{min}$.

21. An ophthalmic lens of claim 1, wherein said lens has a Hydrodell Water Permeability Coefficient of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{min}$.

22. An ophthalmic lens of claim 21, wherein said lens has a Hydrodell Water Permeability Coefficient of greater than about $0.3 \times 10^{-6} \text{ cm}^2/\text{min}$.

23. An ophthalmic lens of claim 22, wherein said lens has a Hydrodell Water Permeability Coefficient of greater than about $0.4 \times 10^{-6} \text{ cm}^2/\text{min}$.

24. An ophthalmic lens of claim 1, wherein when hydrated, said lens has an equilibrium water content of less than about 32 weight percent when tested in accordance with the Bulk Technique.

25. An ophthalmic lens of claim 24, wherein when hydrated, said lens has an equilibrium water content of about 10 to about 30 weight percent when tested in accordance with the Bulk Technique.

26. An ophthalmic lens of claim 25, wherein when hydrated, said lens has an equilibrium water content of about 15 to about 25 weight percent when tested in accordance with the Bulk Technique.

27. An ophthalmic lens of claim 1, wherein said lens comprises a core polymeric material and an ophthalmically compatible surface which is a hydrophilic surface, wherein said surface is more hydrophilic than said core.

5 28. An ophthalmic lens of claim 27, wherein said hydrophilic surface is a hydrophilic polymeric surface coating.

29. An ophthalmic lens of claim 28, wherein said hydrophilic surface coating is applied via a plasma coating process.

10 30. An ophthalmic lens of claim 29, wherein said plasma coating is generated in the presence of a mixture of (a) a C₁₋₆ alkane and (b) a gas selected from the group consisting of nitrogen, argon, oxygen, air and mixtures thereof.

15 31. An ophthalmic lens of claim 30, wherein said plasma coating is generated in the presence of a mixture of methane and air.

32. An ophthalmic lens of claim 1, wherein said oxyperm polymerizable material is a siloxane-containing macromer.

33. An ophthalmic lens of claim 32, wherein said siloxane-containing macromer is a poly(dimethyl siloxane) having a number average molecular weight of at least about 800 and a glass transition temperature less than about -115 degrees Celsius.

5 34. An ophthalmic lens of claim 33, wherein said siloxane-containing macromer has a number average molecular weight of at least about 1700.

35. An ophthalmic lens of claim 32, wherein said polymeric material is formed from a polymerizable mixture comprising about 1 to about 10 weight percent of a low molecular weight siloxane-containing monomer.

36. An ophthalmic lens of claim 35, wherein said low molecular weight siloxane-containing monomer is TRIS.

37. An ophthalmic lens of claim 1, wherein said polymeric material is formed from a polymerizable mixture comprising:

- (a) about 60 to about 85 weight percent oxypem macromer; and
- (b) about 15 to about 40 weight percent ionopem monomer.

38. An ophthalmic lens of claim 37, wherein said polymeric material is formed from a polymerizable mixture comprising:

- (a) about 70 to about 82 weight percent oxypem macromer; and
- (b) about 18 to about 30 weight percent ionopem monomer.


5

39. An ophthalmic lens of claim 1, wherein said polymeric material is formed from a polymerizable mixture comprising:

- (a) about 30 to 60 weight percent oxypem macromer;
- (b) about 20 to 40 weight percent ionopem polymerizable material; and
- (c) about 1 to 35 weight percent TRIS, based on the total lens weight.

40. An ophthalmic lens of claim 1, wherein said polymeric material includes a polymer composition having good optical clarity and high oxygen permeability, comprising:

(a) about 5 to about 94 dry weight percent of a macromer having the formula:

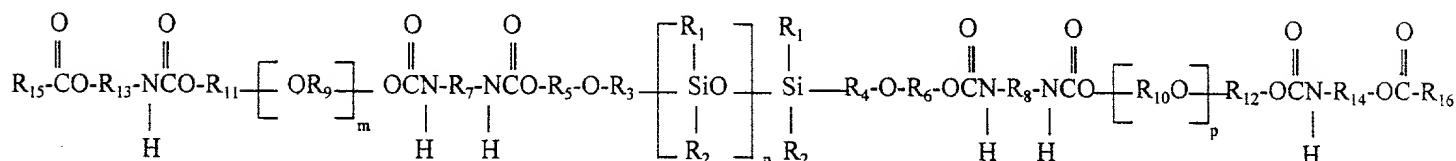

wherein:

R₁ and R₂ are selected from C₁-C₆ alkyl,

R₃, R₄, R₅, and R₆ are selected from C₁-C₆ alkylene,

R₇ and R₈ are selected from linear or branched alkylene and bivalent cycloalkylene,

R₉, R₁₀, R₁₁, and R₁₂ are selected from C₁-C₂ alkylene,

R₁₃ and R₁₄ are selected from C₁-C₆ alkylene,

R₁₅ and R₁₆ are selected from linear or branched lower alkenylene,

m and p, independently of one another, are about 3 to about 44, and

n is about 13 to about 80,

wherein said macromer has a number-average molecular weight of 2000 to 10,000;

(b) about 5 to about 60 weight percent of an acrylated or methacrylated siloxane monomer;


(c) about 1 to about 30 weight percent of an acrylate or methacrylate monomer; and

(d) 0 to 5 weight percent cross-linking agent;

wherein said weight percentages are based upon the dry weight of the polymer components.

41. An ophthalmic lens of claim 40, wherein said lens is a contact lens.

42. An ophthalmic lens of claim 1, wherein said polymeric material comprises a polymer formed by polymerization of at least one macromer of formula (I):



where each P_1 , independently of the others, is a free-radical-polymerizable group;


each Y , independently of the others, is $-\text{CONHCOO}-$, $-\text{CONHCONH}-$, $-\text{OCONHCO}-$, $-\text{NHCONHCO}-$, $-\text{NHCO}-$, $-\text{CONH}-$, $-\text{NHCONH}-$, $-\text{COO}-$, $-\text{OCO}-$, $-\text{NHCOO}-$ or $-\text{OCONH}-$;

m and p , independently of one another, are 0 or 1;

each L , independently of the others, is a divalent radical of an organic compound having up to 20 carbon atoms;

each X_1 , independently of the others, is $-\text{NHCO}-$, $-\text{CONH}-$, $-\text{NHCONH}-$, $-\text{COO}-$, $-\text{OCO}-$, $-\text{NHCOO}-$ or $-\text{OCONH}-$; and

Q is a bivalent polymer fragment consisting of the segments:




where $x+y$ is a number in the range of from 10 to 30;

each Z , independently of the others, is a divalent radical having up to 12 carbon atoms or Z is a bond;

each E, independently of the others, is $-(\text{OCH}_2\text{CH}_2)_q-$, where q has a value of from 0 to 2, and where the link -Z-E- represents the sequence $-Z-(\text{OCH}_2\text{CH}_2)_q-$; and


k is 0 or 1;

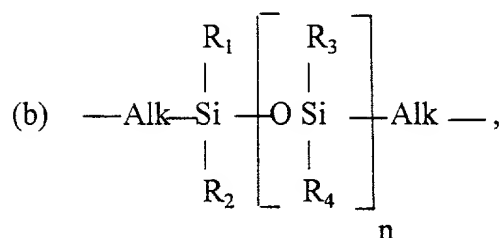

where n is an integer from 5 to 100;

Alk is alkylene having up to 20 carbon atoms;

80-100% of the radicals R_1 , R_2 , R_3 and R_4 , independently of one another, are alkyl and 0-20% of the radicals R_1 , R_2 , R_3 and R_4 , independently of one another, are alkenyl, aryl or cyanoalkyl; and




where R is a divalent organic radical having up to 20 carbon atoms, and

each X_2 , independently of the others, is $-\text{NHCO}-$, $-\text{CONH}-$, $-\text{NHCONH}-$, $-\text{COO}-$, $-\text{OCO}-$, $-\text{NHCOO}-$ or $\text{OCONH}-$;

with the provisos that there must be at least one of each segment (a), (b), and (c) in Q, that each segment (a) or (b) has a segment (c) attached to it, and that each segment (c) has a segment (a) or (b) attached to it.

43. An ophthalmic lens of claim 42, wherein said lens is a contact lens.

44. An ophthalmic lens of claim 1, wherein said polymeric material comprises a polymer, which polymer is produced by polymerizing at least one macromer comprising at least one segment of formula (I)



in which (a) is a polysiloxane segment,

(b) is a polyol segment which contains at least 4 C atoms,

Z is a segment (c) or a group X_1 ,

(c) is defined as $X_2\text{-R-X}_2$, wherein

R is a bivalent radical of an organic compound having up to 20 C atoms and

each X_2 independently of the other is a bivalent radical which contains at least one carbonyl group,

X_1 is defined as X_2 , and

(d) is a radical of the formula (II):



in which P_1 is a group which can be polymerized by free radicals;


Y and X_3 independently of one another are a bivalent radical which contains at least one carbonyl group;

k is 0 or 1; and

L is a bond or a divalent radical having up to 20 C atoms of an organic compound.

45. An ophthalmic lens of claim 44 which is a contact lens.

46. An ophthalmic lens of claim 1, wherein said polymeric material comprises a polymer, which polymer is produced by polymerizing at least one macromer of the formula:

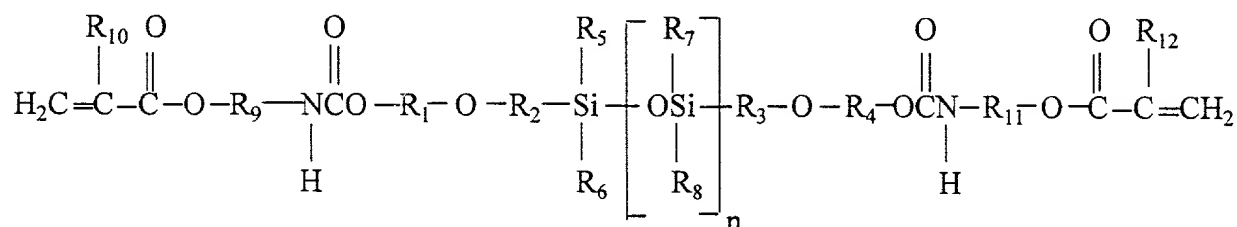

where n is an integer from about 5 to about 500,

R_1 , R_2 , R_3 , and R_4 , independently of one another, are lower alkylene,


R_5 , R_6 , R_7 , and R_8 are, independently of one another, are alkyl,

R_9 and R_{11} are alkylene, and

R_{10} and R_{12} are methyl or hydrogen.

47. An ophthalmic lens of claim 46, wherein said polymeric material is formed by polymerization of a prepolymer mixture, which, in weight percentages based on total mixture weight, comprises:

(a) about 45 to about 65 percent of a siloxane-containing macromer of the formula:

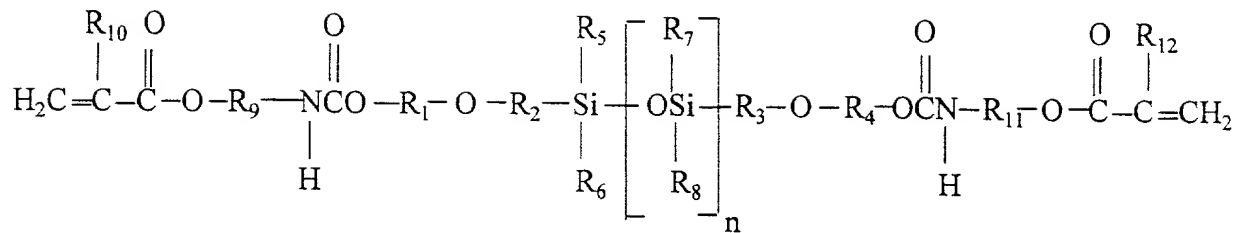

where n is an integer from about 5 to about 500,

R_1 , R_2 , R_3 , and R_4 , independently of one another, are lower alkylene,

R_5 , R_6 , R_7 , and R_8 are, independently of one another, are alkyl,

R_9 and R_{11} are alkylene, and

R_{10} and R_{12} are methyl or hydrogen;

(b) about 5 to about 25 percent TRIS; and

(c) about 20 to about 40 percent ionoperm monomer

48. An ophthalmic lens of claim 47 which is a contact lens.

49. An ophthalmic lens of claim 1, wherein said lens allows oxygen transmission in an amount sufficient to prevent any clinically significant corneal swelling during a period of extended, continuous contact with ocular tissue and ocular fluids.

50. An ophthalmic lens of claim 1, wherein said lens produces, after wear of about 24 hours, including normal sleep periods, less than about 8% corneal swelling.

51. An ophthalmic lens of claim 50, wherein said lens produces, after wear of about 24 hours, including normal sleep periods, less than about 6% corneal swelling.

52. An ophthalmic lens of claim 51, wherein said lens produces, after wear of about 24 hours, including normal sleep periods, less than about 4% corneal swelling.

53. An ophthalmic lens of claim 1, wherein said period of extended continuous contact is at least 24 hours.

54. An ophthalmic lens of claim 53, wherein said period of extended continuous contact is at least 4 days.

55. An ophthalmic lens of claim 54, wherein said period of extended continuous contact is at least 7 days.

56. An ophthalmic lens of claim 55, wherein said period of extended continuous contact is at least 14 days.

57. An ophthalmic lens of claim 56, wherein said period of extended continuous contact is at least 30 days.

58. An ophthalmic lens of claim 1, wherein said lens has a tensile modulus of 3 MPa or less.

59. An ophthalmic lens of claim 1, wherein said lens has a short relaxation time constant of greater than about 3.5 seconds.

5 60. An ophthalmic lens of claim 59, wherein said lens has an Ionoton Ion Permeability Coefficient, P, of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{sec}$.

61. An ophthalmic lens of claim 59, wherein said lens has an Ionoflux Diffusion Coefficient of greater than about $2.6 \times 10^{-6} \text{ mm}^2/\text{min}$.

62. An ophthalmic lens of claim 59, wherein said lens has a Hydrodell Water Permeability Coefficient of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{min}$.

63. An ophthalmic lens of claim 1, wherein the polymeric material has a $\tan \delta$ above about 0.25 at about 10 Hz.

64. An ophthalmic lens of claim 1, wherein said lens has an Ionoton Ion Permeability Coefficient of greater than about $0.3 \times 10^{-6} \text{ cm}^2/\text{sec}$, a tensile modulus of 3 MPa or less, and a short relaxation time constant of greater than about 3.5 seconds.

65. An ophthalmic lens of claim 1, wherein said lens has an Ionoflux Diffusion Coefficient of greater than about $2.6 \times 10^{-6} \text{ mm}^2/\text{min.}$, a tensile modulus of 3 MPa or less, and a short relaxation time constant of greater than about 3.5 seconds.

5 66. An ophthalmic lens of claim 1, wherein said lens has a Hydrodell Water Permeability Coefficient of greater than about $0.3 \times 10^{-6} \text{ cm}^2/\text{min.}$, a tensile modulus of 3 MPa or less, and a short relaxation time constant of greater than about 3.5 seconds.

67. An ophthalmic lens of claim 1, wherein said lens comprises a core polymeric material and an ophthalmically compatible surface which is a hydrophilic surface, wherein:

said surface is more hydrophilic than said core,

said period of extended continuous contact period is at least 7 days,

said core material has an Ionoton Ion Permeability Coefficient of greater than about $0.3 \times 10^{-6} \text{ cm}^2/\text{sec}$, a tensile modulus of 3 MPa or less, and a short relaxation time constant of greater than about 3.5 seconds,

said lens has an equilibrium water content of about 10 to about 30 weight percent when tested in accordance with the Bulk Technique,

said lens has an oxygen permeability of at least 70 barrers/mm, and

said lens is an extended-wear contact lens.

68. An ophthalmic lens of claim 1, wherein said lens comprises a core polymeric material and an ophthalmically compatible surface which is a hydrophilic surface, wherein:

said surface is more hydrophilic than said core,

said period of extended continuous contact period is at least 7 days,

said core material has an Ionoflux Diffusion Coefficient of greater than about 2.6×10^{-6} mm²/min., a tensile modulus of 3 MPa or less, and a short relaxation time constant of greater
 5 than about 3.5 seconds,

said lens has an equilibrium water content of about 10 to about 30 weight percent when tested in accordance with the Bulk Technique,

said lens has an oxygen permeability of at least 70 barrers/mm, and

said lens is an extended-wear contact lens.

69. An ophthalmic lens of claim 1, wherein said lens comprises a core polymeric material and an ophthalmically compatible surface which is a hydrophilic surface, wherein:

said surface is more hydrophilic than said core,

said period of extended continuous contact period is at least 7 days,

said core material has a Hydrodell Water Permeability Coefficient of greater than about 0.2×10^{-6} cm²/min., a tensile modulus of 3 MPa or less, and a short relaxation time constant of greater than about 3.5 seconds,

said lens has an equilibrium water content of about 10 to about 30 weight percent when tested in accordance with the Bulk Technique,

said lens has an oxygen permeability of at least 70 barrers/mm, and

said lens is an extended-wear contact lens.

70. An ophthalmic lens, comprising an inner and outer surface, wherein said inner surface is adapted to rest immediately adjacent to the human cornea, wherein said lens has the following properties:

(a) an oxygen permeability from said inner to said outer surface sufficient to prevent substantial corneal swelling during a period of extended wear;

(b) ophthalmic compatibility during a period of extended, continuous, intimate contact with the ocular environment; and

(c) ion or water permeability sufficient to allow lens movement on the eye in an amount sufficient to sustain corneal health and wearer comfort.

71. An ophthalmic lens of claim 70, wherein said period of extended wear is at least 24 hours.

72. An ophthalmic lens of claim 71, wherein said lens produces, after wear of about 24 hours, including normal sleep periods, less than about 8% corneal swelling.

73. An ophthalmic lens of claim 72, wherein said lens produces, after wear of about 24 hours, including normal sleep periods, less than about 6% corneal swelling.

74. An ophthalmic lens of claim 73, wherein said lens produces, after wear of about 24 hours, including normal sleep periods, less than about 4% corneal swelling.

75. An ophthalmic lens of claim 71, wherein said extended period of wear is at least 4 days.

76. An ophthalmic lens of claim 75, wherein said extended period of wear is at least 7 days.

77. An ophthalmic lens of claim 76, wherein said lens produces, after wear of about 7 days,
5 including normal sleep periods, less than about 10% corneal swelling.

78. An ophthalmic lens of claim 77, wherein said lens produces, after wear of about 7 days,
including normal sleep periods, less than about 7% corneal swelling.

79. An ophthalmic lens of claim 78, wherein said lens produces, after wear of about 7 days,
10 including normal sleep periods, less than about 5% corneal swelling.

80. An ophthalmic lens of claim 70, wherein said period of extended wear is at least 14 days.

81. An ophthalmic lens of claim 80, wherein said extended period of wear is at least 30 days.
15

82. An ophthalmic lens of claim 70, wherein said oxygen permeability (Dk) is at least 70
barrers/mm.

20 83. An ophthalmic lens of claim 70, wherein said lens has a tensile modulus of 1.5 MPa or less.

84. An ophthalmic lens of claim 70, wherein said lens has a short relaxation time constant of greater than about 3.5 seconds.

85. An ophthalmic lens of claim 1, wherein the polymeric material has a $\tan \delta$ above about 0.25 at about 10 Hz.

86. An ophthalmic lens of claim 70, wherein said lens has an Ionoton Ion Permeability Coefficient of at least about $0.2 \times 10^{-6} \text{ cm}^2/\text{sec}$.

87. An ophthalmic lens of claim 70, wherein said lens has an Ionoflux Diffusion Coefficient of greater than about $1.5 \times 10^{-6} \text{ mm}^2/\text{min}$.

88. An ophthalmic lens of claim 70, wherein said lens has a Hydrodell Water Permeability Coefficient of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{min}$.

89. An ophthalmic lens of claim 70, wherein said extended period of wear is at least 24 hours and said oxygen transmissibility is at least 80 barrers/mm, and wherein said lens has a tensile modulus of 1.5 MPa or less, a short relaxation time constant of 1.4 to 10 seconds, and an Ionoton Ion Permeability Coefficient of at least $0.2 \times 10^{-6} \text{ cm}^2/\text{sec}$.

90. An ophthalmic lens of claim 70, wherein said extended period of wear is at least 4 days and said oxygen permeability (Dk) is at least 90 barrers/mm, and wherein said lens has a tensile

modulus of 1.5 MPa or less, a short relaxation time constant of greater than about 3.5 seconds, and an Ionoton Ion Permeability Coefficient of at least $0.4 \times 10^{-6} \text{ cm}^2/\text{sec}$

91. An ophthalmic lens of claim 70, wherein said extended period of wear is at least 4 days and said oxygen permeability (Dk) is at least 90 barrers/mm, and wherein said lens has a tensile modulus of 1.5 MPa or less, a short relaxation time constant of greater than about 3.5 seconds, and an Ionoflux Diffusion Coefficient of greater than about $1.5 \times 10^{-6} \text{ mm}^2/\text{min}$.

92. An ophthalmic lens of claim 70, wherein said extended period of wear is at least 4 days and said oxygen permeability (Dk) is at least 90 barrers/mm, and wherein said lens has a tensile modulus of 1.5 MPa or less, a short relaxation time constant of greater than about 3.5 seconds, and a Hydrodell Water Permeability Coefficient of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{min}$.

93. A method of using a contact lens as an extended wear lens, said lens having ophthalmically compatible inner and outer surfaces, said lens being suited to extended periods of wear in continuous, intimate contact with ocular tissue and ocular fluids, said lens comprising a polymeric material which has a high oxygen permeability and a high water permeability, said polymeric material being formed from polymerizable materials including:

- (a) at least one oxyperm polymerizable; and
- (b) at least one ionoperm polymerizable,

wherein said lens allows oxygen permeation in an amount sufficient to maintain corneal health and wearer comfort during a period of extended, continuous contact with ocular tissue and ocular fluids, and

wherein said lens allows ion permeation in an amount sufficient to enable the lens to move on the eye such that corneal health is not substantially harmed and wearer comfort is acceptable during a period of extended, continuous contact with ocular tissue and ocular fluids,

said method comprising the steps of:

- (a) applying said lens to the ocular environment; and
- (b) allowing said lens to remain in intimate contact with the ocular environment for a first period of at least 24 hours.

94. A method of claim 93, further including the steps of:

- (c) removing said lens from the ocular environment;
- (d) disinfecting or cleaning said lens;
- (e) re-applying said lens to the ocular environment; and
- (f) allowing said lens to remain in intimate contact with the ocular environment for a second period of at least 24 hours.

95. A method of claim 93, wherein said first intimate contact period is at least 4 days.

96. A method of claim 94, wherein said first and second intimate contact periods are at least 4 days.

97. A method of claim 95, wherein said first intimate contact period is at least 7 days.

98. A method of claim 96, wherein said first and second intimate contact periods are at least 7
5 days.

99. A method of claim 97, wherein said first intimate contact period is at least 14 days.

100. A method of claim 98, wherein said first and second intimate contact periods are at least 14
10 days.

101. A method of claim 99, wherein said first intimate contact period is at least 30 days.

102. A method of claim 100, wherein said first and second intimate contact periods are at least
15 30 days.

103. An ophthalmic lens of claim 93, wherein said lens produces, after wear of about 24 hours,
including normal sleep periods, less than about 8% corneal swelling.

20 104. An ophthalmic lens of claim 103, wherein said lens produces, after wear of about 24 hours,
including normal sleep periods, less than about 6% corneal swelling.

105. An ophthalmic lens of claim 104, wherein said lens produces, after wear of about 24 hours, including normal sleep periods, less than about 4% corneal swelling.

106. An ophthalmic lens of claim 93, wherein said lens produces, after wear of about 7 days, including normal sleep periods, less than about 10% corneal swelling.

107. An ophthalmic lens of claim 106, wherein said lens produces, after wear of about 7 days, including normal sleep periods, less than about 7% corneal swelling.

108. An ophthalmic lens of claim 107, wherein said lens produces, after wear of about 7 days, including normal sleep periods, less than about 5% corneal swelling.

109. A method of forming a biocompatible lens having high oxygen permeability and high water permeability, said method comprising the steps of:

(a) forming a core material including:

(1) at least one continuous pathway from front curve to base curve surfaces for oxygen transmission therethrough, and

(2) at least one continuous pathway from front curve to base curve surfaces for water transmission therethrough; and

(b) altering the surface of said core material to produce a surface which is more hydrophilic than said core material,

whereby said lens allows oxygen permeation in an amount sufficient to maintain corneal health and wearer comfort during a period of extended, continuous contact with ocular tissue and ocular fluids, and

whereby said lens allows ion permeation in an amount sufficient to enable the lens to move on the eye such that corneal health is not substantially harmed and wearer comfort is acceptable during a period of extended, continuous contact with ocular tissue and ocular fluids.

110. A method of claim 109, wherein said ophthalmic lens has an oxygen permeability of at least 70 barrers/mm.

111. A method of claim 110, wherein said ophthalmic lens has an oxygen permeability of at least 87 barrers/mm.

112. A method of claim 109, wherein said intimate contact period is at least 24 hours.

113. A method of claim 112, wherein said intimate contact period is at least 7 days.

114. A method of claim 109, wherein said lens has an Ionoton Ion Permeability Coefficient of at least about $0.3 \times 10^{-6} \text{ cm}^2/\text{sec}$.

115. An ophthalmic lens of claim 109, wherein said lens has an Ionoflux Diffusion Coefficient of greater than about $1.5 \times 10^{-6} \text{ mm}^2/\text{min}$.

116. An ophthalmic lens of claim 109, wherein said lens has a Hydrodell Water Permeability Coefficient of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{min}$.

5 117. A method of claim 111, wherein said intimate contact period is at least 7 days.

118. A method of claim 112, wherein said intimate contact period is at least 14 days.

10 119. A method of claim 118, wherein said surface altering comprises plasma treating said surface to render said surface more hydrophilic than said core.

120. An ophthalmic lens having ophthalmically compatible inner and outer surfaces, said lens being suited to extended periods of wear in continuous, intimate contact with ocular tissue and ocular fluids, said lens comprising a polymeric material which has a high oxygen permeability and a high ion permeability, said polymeric material being formed from polymerizable materials comprising at least one polymerizable material comprising:

(a) at least one oxyperm segment; and

(b) at least one ionoperm segment,

wherein said lens allows oxygen permeation in an amount sufficient to maintain corneal health and wearer comfort during a period of extended, continuous contact with ocular tissue and ocular fluids, and

20

wherein said lens allows ion or water permeation in an amount sufficient to enable the lens to move on the eye such that corneal health is not substantially harmed and wearer comfort is acceptable during a period of extended, continuous contact with ocular tissue and ocular fluids.

5 121. An ophthalmic lens of claim 120, wherein said ophthalmic lens has an oxygen transmissibility of at least about 70 barrers/mm.

122. An ophthalmic lens of claim 121, wherein said ophthalmic lens has an oxygen transmissibility of at least about 75 barrers/mm.

123. An ophthalmic lens of claim 122, wherein said ophthalmic lens has an oxygen transmissibility of at least about 87 barrers/mm.

124. An ophthalmic lens of claim 120, wherein said lens has an Ionoton Ion Permeability Coefficient of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{sec}$.

125. An ophthalmic lens of claim 120, wherein said lens has an Ionoflux Diffusion Coefficient of greater than about $1.5 \times 10^{-6} \text{ mm}^2/\text{min}$.

20 126. An ophthalmic lens of claim 120, wherein said lens has a Hydrodell Water Permeability Coefficient of greater than about $0.2 \times 10^{-6} \text{ cm}^2/\text{min}$.

127. A method of screening an ophthalmic lens for utility as an extended-wear lens, said method comprising the steps of:

(a) allowing said lens to be fully hydrated by allowing said lens to equilibrate in a saline solution;

5 (b) testing the lens to determine a factor which is a function of the oxygen transmissibility of said lens;

(c) testing the lens to determine a factor which is a function of the ion or water permeability of said lens; and

10 (d) selecting said lens as an extended-wear lens if said oxygen transmissibility factor and said water or ion permeability factor are both above predetermined limits which are established to ensure good corneal health and wearer comfort when said lens is in intimate contact with a human eye for a period of continuous, extended wear of at least 24 hours.

15 128. A screening method of claim 127, wherein said ion permeability factor is the Ionoton Ion Permeability Coefficient

129. A screening method of claim 128, wherein said Ionoton Ion Permeability Coefficient is greater than about $0.3 \times 10^{-6} \text{ cm}^2/\text{sec}$.

20 130. A screening method of claim 127, wherein said ion permeability factor is the Ionoflux Diffusion Coefficient.

131. A screening method of claim 130, wherein said Ionoflux Diffusion Coefficient is greater than about $2.6 \times 10^{-6} \text{ mm}^2/\text{min}$.

132. A screening method of claim 127, wherein said water permeability factor is the Hydrodell
5 Water Permeability Coefficient.

133. A screening method of claim 132, wherein said Hydrodell Water Permeability Coefficient is greater than about about $0.3 \times 10^{-6} \text{ cm}^2/\text{min}$


134. A screening method of claim 129, wherein said oxygen transmissibility factor is the Dk and
10 the limit is 70 barrers/mm.

135. A screening method of claim 131, wherein said oxygen transmissibility factor is the Dk and
15 the limit is 70 barrers/mm.

136. A screening method of claim 133, wherein said oxygen transmissibility factor is the Dk and
the limit is 70 barrers/mm.

137. A polymer composition having good optical clarity and high oxygen permeability, comprising:

(a) about 5 to about 94 dry weight percent of a macromer having the formula:

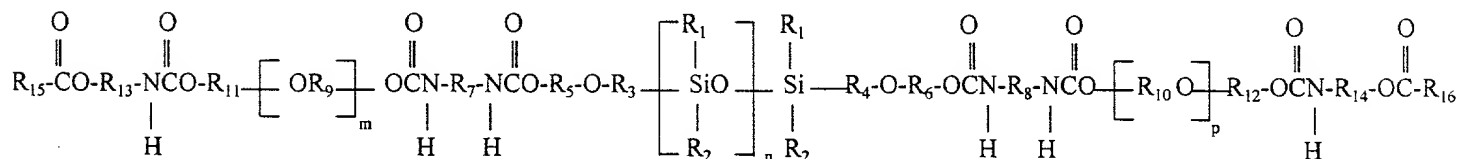

wherein:

R₁ and R₂ are selected from C₁-C₆ alkyl,

R₃, R₄, R₅, and R₆ are selected from C₁-C₆ alkylene,

R₇ and R₈ are selected from linear or branched alkylene and bivalent cycloalkylene,

R₉, R₁₀, R₁₁, and R₁₂ are selected from C₁-C₂ alkylene,

R₁₃ and R₁₄ are selected from C₁-C₆ alkylene,

R₁₅ and R₁₆ are selected from linear or branched lower alkenylene,

m and p, independently of one another, are about 3 to about 44, and

n is about 13 to about 80,

wherein said macromer has a number-average molecular weight of 2000 to 10,000;

(b) about 5 to about 60 weight percent of an acrylated or methacrylated siloxane monomer;

(c) about 1 to about 30 weight percent of an acrylate or methacrylate monomer; and

(d) 0 to 5 weight percent cross-linking agent;

wherein said weight percentages are based upon the dry weight of the polymer components.

138. A polymer of claim 137, wherein said siloxane monomer is 3-methacryloxypropyltris (trimethylsiloxy)silane.

139. A polymer of claim 137, comprising:

- (a) 70 to 90 weight percent of said macromer;
- (b) 8 to 20 weight percent of said siloxane monomer;
- (c) 1 to 5 weight percent hydrophilic monomer; and
- (d) 0 to 2 weight percent cross-linking agent.

140. A polymer of claim 137, comprising about 10 to about 50 weight percent water.

141. A polymer of claim 140, wherein said water content is about 10 to about 30 weight percent.

142. A polymer of claim 141, wherein said water content is about 15 to about 22 weight percent.

143. A polymer of claim 139, comprising about 80 to 84 weight percent of said polysiloxane macromer.

144. A polymer of claim 139, comprising about 12 to 15 weight percent methacryloxypropyltris (trimethylsiloxy)silane.

145. A polymer of claim 137, wherein said acrylate or methacrylate component is 2-hydroxyethyl methacrylate.

146. A polymer of claim 140, comprising about 3 to about 4 weight percent of 2-hydroxyethyl methacrylate.

147. A polymer of claim 137, wherein said cross-linking agent is ethylene glycol dimethacrylate.

148. A polymer of claim 147, comprising about 0.7 to 1.2 weight percent ethylene glycol dimethacrylate

149. A polymer of claim 137, comprising:

- (a) about 80 to about 84 weight percent polysiloxane macromer;
- (b) about 12 to about 15 weight percent methacryloxypropyltris(trimethylsiloxy)silane;
- (c) about 3 to about 4 weight percent 2-hydroxyethyl methacrylate; and
- (d) about 0.7 to 1.2 weight percent ethylene glycol dimethacrylate.

150. A polymer of claim 149 having about 15 to about 22 weight percent water, based on total polymer weight.

151. A contact lens, comprising the polymer of claim 137.

152. A contact lens of claim 151, having a D_k greater than 80 barrers and a water content of about 10 to 30 weight percent.

5 153. A contact lens, comprising the polymer of claim 139.

154. A contact lens, comprising the polymer of claim 150.

10 155. A contact lens of claim 154, having a D_k greater than 80 barrers and a water content of about 10 to 30 weight percent.

156. A method of forming a molded polymeric article suitable for ophthalmic applications, comprising the steps of:

15 (a) contacting a poly(dialkylsiloxane) dialkanol with a diisocyanate compound in the presence of a first catalyst at conditions sufficient to cause reaction of said dialkanol with said diisocyanate, thereby forming a first mixture;

(b) contacting said first mixture with poly(alkylene glycol), a second catalyst, and sufficient solvent to ensure mixture homogeneity, thereby forming a second mixture;

20 (c) evaporating sufficient solvent from said second mixture to generate a third mixture having a solids content of about 40 to 60 weight percent;

(d) adding isocyanatoalkyl methacrylate to said third mixture, thereby forming a fourth mixture containing a polysiloxane macromer;

(e) adding to said fourth mixture 3-methacryloxypropyltris(trimethylsiloxy)silane (TRIS), a hydrophilic monomer, a cross-linking agent and a photoinitiator, thereby forming a fifth mixture;

(f) placing said fifth mixture into a mold; and

(g) applying sufficient radiation to said fifth mixture to copolymerize the polymerizable material contained therein, thereby forming said polymeric material into a molded polymeric article.

157. A method as recited in claim 156, wherein said molded polymeric article is a contact lens.

158. A method of claim 156, comprising the steps of:

(a) contacting poly(dimethylsiloxane) dialkanol with isophorone diisocyanate in the presence of dibutyltin dilaurate at conditions sufficient to cause reaction of said dialkanol with said diisocyanate, thereby forming a first mixture;

(b) contacting said first mixture with poly(ethylene glycol), dibutyltin dilaurate, and sufficient solvent to ensure mixture homogeneity, thereby forming a second mixture;

(c) evaporating sufficient solvent from said second mixture to generate a third mixture having a solids content of about 40 to 60 weight percent;

(d) adding isocyanatoethyl methacrylate to said third mixture, thereby forming a fourth mixture containing a polysiloxane macromer;

(e) adding to said fourth mixture 3-methacryloxypropyltris(trimethylsiloxy)silane, 2-hydroxyethyl methacrylate, ethylene glycol dimethacrylate and a photoinitiator, thereby forming a fifth mixture;

(f) placing said fifth mixture into a mold; and

5 (g) applying sufficient radiation to copolymerize said polysiloxane macromer, TRIS, HEMA, and EGDMA, thereby forming said polymeric material into a molded polymeric article.

ABSTRACT

An ophthalmic lens suited for extended-wear periods of at least one day on the eye
5 without a clinically significant amount of corneal swelling and without substantial wearer
discomfort. The lens has a balance of oxygen permeability and ion or water permeability, with
the ion or water permeability being sufficient to provide good on-eye movement, such that a
good tear exchange occurs between the lens and the eye. A preferred lens is a copolymerization
product of a oxyperm macromer and an ionoperm monomer. The invention encompasses
10 extended wear contact lenses, which include a core having oxygen transmission and ion
transmission pathways extending from the inner surface to the outer surface.

☒ Original ☐ Supplemental ☐ Substitute ☐ PCT

Griesser, Hans Jörg
Laycock, Bronwyn Glenice
Meijs, Gordon Francis

My residence, post office address and citizenship are as stated below next to my name.

Nicolson, Paul Clement	Höpken, Jens	Sweeney, Deborah
Baron, Richard Carlton	Liu, Qin	Terry, Jr., Wilson Leonard
Chabreck, Peter	Lohmann, Dieter	Vogt, Jürgen
Court, John	Papaspiliotopoulos, Eric	Winterton, Lynn Cook
Domschke, Angelika	Riffle, Judy Smith	
Ho, Arthur	Schindhelm, Klaus	

EXTENDED WEAR OPHTHALMIC LENS

☐ the attached specification.

☒ the specification in application Serial No. 08/569,816,
filed 12/08/95 and as amended on _____ (if applicable).
(month/day/year) (month/day/year)

☐ the specification in International Application No. PCT/ _____
filed _____ and as amended on _____ (if applicable).
(month/day/year) (month/day/year)

I acknowledge the duty to disclose all information which is known to be material to the patentability of this application as defined in 37 C.F.R. 1.56.

1

I hereby claim foreign priority benefits under 35 U.S.C. 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America relating to this subject matter having a filing date before that of the application on which priority is claimed:

COUNTRY (OR PCT)	APPLICATION NO.	FILING DATE (month/day/year)	PRIORITY CLAIMED
<u>Germany</u>	<u>95810221.1</u>	<u>04/04/95</u>	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
<u>Switzerland</u>	<u>1496/95</u>	<u>05/19/95</u>	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s) or PCT international application(s) designating the United States listed below and, insofar as the application discloses and claims subject matter in addition to that disclosed in the prior copending application, I acknowledge the duty to disclose all information known to be material to patentability as defined in 37 C.F.R. 156 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

SERIAL NO.	FILING DATE (month/day/year)	STATUS
<u>08/301,166</u>	<u>09/06/94</u>	<input type="checkbox"/> Patented <input checked="" type="checkbox"/> Pending <input type="checkbox"/> Abandoned
_____	_____	<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned
_____	_____	<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned

PCT APPLICATION NO.	INTERNATIONAL FILING DATE (month/day/year)	U.S. SERIAL NO. (if any)	STATUS
_____	_____	_____	<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned

I hereby appoint the following attorneys and agents, each of them with full power of substitution, revocation and appointment of associates, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

Michael W. Glynn (Reg. No. 27,285), Edward McC. Roberts (25,106),
 Luther A. R. Hall (Reg. No. 27,337), Norbert Gruenfeld (Reg. No. 30,061),
 JoAnn L. Villamizar (Reg. No. 30,598), Kevin T. Mansfield (Reg. No. 31,635),
 Marla J. Mathias (Reg. No. 32,663), Henry P. Nowak (Reg. No. 33,200).
 William A. Teoli, Jr. (Reg. No. 33,104), George R. Dohmann (Reg. No. 33,593),
 R. Scott Meece (Reg. No. 34,675), Andrea C. Walsh (Reg. No. 34,988),
 James Scott Elmer (Reg. No. 36,129), Michele A. Kovaleski (Reg. No. 37,865),
 David R. Crichton (37,300), and Vineet Kohli (Reg. No. 37,003).

Address all correspondence to:

Michael W. Glynn
 Patent Department
 Ciba-Geigy Corporation
 520 White Plains Road
 P.O. Box 2005
 Tarrytown, New York 10591-9005

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first
 joint inventor

Nicolson, Paul Clement

Inventor's signature

 Date: _____
 month/day/year

Residence:
 7765 Sagebrush Drive
 Dunwoody, Georgia 30350

Post Office Address:
 7765 Sagebrush Drive
 Dunwoody, Georgia 30350

Citizenship:

United States of America

Full name second
 joint inventor

Baron, Richard Carlton

Inventor's signature

 Date: _____
 month/day/year

Residence:
 115 Kiltirnan Court
 Alpharetta, Georgia 30201

Post Office Address:
 115 Kiltirnan Court
 Alpharetta, Georgia 30201

Citizenship:

United States of America

Full name of third
joint inventor

Chabrecek, Peter

Inventor's signature

Date: _____
month/day/year

Residence:
Friedrichstrasse 13
4055 Basle, Switzerland

Post Office Address:
Friedrichstrasse 13
4055 Basle, Switzerland

Citizenship:

Slovakia

Full name of fourth
joint inventor

Court, John

Inventor's signature

Date: _____
month/day/year

Residence:
34/333 Bulwara Road
Ultimo NSW 2007
Australia

Post Office Address:
34/333 Bulwara Road
Ultimo NSW 2007
Australia

Citizenship:

Australia

Full name of fifth
joint inventor

Domschke, Angelika

Inventor's signature

Date: _____
month/day/year

Residence:
Inzlinger Strasse 14
79540 Lörrach, Germany

Post Office Address:
Inzlinger Strasse 14
79540 Lörrach, Germany


Citizenship:

Germany

Full name of sixth
joint inventor

Griesser, Hans Jörg

Inventor's signature



Date: 02/05/96
month/day/year

Residence:
The Patch
Victoria 3792,
Australia

Post Office Address:
The Patch
Victoria 3792,
Australia

Citizenship:

Switzerland

Full name of seven
joint inventor

Ho, Arthur

Inventor's signature

Date: _____
month/day/year

Residence:
12/50 Fern Street
Randwick NSW 2031
Australia

Post Office Address:
12/50 Fern Street
Randwick NSW 2031
Australia

Citizenship:

Australia

Full name of eighth
joint inventor

Höpken, Jens

Inventor's signature

Date: _____
month/day/year

Residence:
Inzlinger Strasse 33
79540 Lörrach, Germany

Post Office Address:
Inzlinger Strasse 33
79540 Lörrach, Germany

Citizenship:

Germany

Full name of ninth
joint inventor

Laycock, Bronwyn Glenice

Inventor's signature



Date:

2/12/96
month/day/year

Residence:
4 Churchill Street
Heidelberg Heights
Victoria 3081
Australia

Post Office Address:
4 Churchill Street
Heidelberg Heights
Victoria 3081
Australia

Citizenship:

Australia

Full name of tenth
joint inventor

Liu, Qin

Inventor's signature

Date:

month/day/year

Residence:
3250 River Summit Trail
Duluth, Georgia 30136

Post Office Address:
3250 River Summit Trail
Duluth, Georgia 30136

Citizenship:

China

Full name of eleventh
joint inventor

Lohmann, Dieter

Inventor's signature

Date:

month/day/year

Residence:
Mittelweg 56
4142 Munchestein,
Switzerland

Post Office Address:
Mittelweg 56
4142 Munchestein,
Switzerland

Citizenship:

Switzerland

Full name of twelfth
joint inventor

Meijs, Gordon Francis

Inventor's signature

Gordon F. Meijs

Date: February 13, 1996
month/day/year

Residence:
3 Henty Street

Murrumbeena, Victoria 3163
Australia

Post Office Address:
P. O. Box 267

Carnegie, Victoria 3163
Australia

Citizenship:

Australia

Full name of thirteenth
joint inventor

Papaspiliotopoulos, Eric

Inventor's signature

Date: _____
month/day/year

Residence:
10/52 Goodhope Street
Paddington NSW 2021
Australia

Post Office Address:
10/52 Goodhope Street
Paddington NSW 2021
Australia

Citizenship:

United Kingdom

Full name of fourteenth
joint inventor

Riffle, Judy Smith

Inventor's signature

Date: _____
month/day/year

Residence:
608 Floyd Street
Blacksburg, Virginia 24060

Post Office Address:
608 Floyd Street
Blacksburg, Virginia 24060

Citizenship:

United States of America

Full name of fifteenth
joint inventor

Schindhelm, Klaus

Inventor's signature

Date:

month/day/year

Residence:
72 Francis Greenway Drive
Cherrybrook NSW 2120
Australia

Post Office Address:
72 Francis Greenway Drive
Cherrybrook NSW 2120
Australia

Citizenship:

Australia

Full name of sixteenth
joint inventor

Sweeney, Deborah

Inventor's signature

Date:

month/day/year

Residence:
23 Malga Avenue
Roseville NSW 2069
Australia

Post Office Address:
23 Malga Avenue
Roseville NSW 2069
Australia

Citizenship:

Australia

Full name of seventeenth
joint inventor

Terry, Jr., Wilson Leonard

Inventor's signature

Date:

month/day/year

Residence:
755 Cirrus Drive
Alpharetta, Georgia 30202

Post Office Address:
755 Cirrus Drive
Alpharetta, Georgia 30202

Citizenship:

United States of America

Full name of eighteenth
joint inventor

Vogt, Jürgen

Inventor's signature

Date: _____
month/day/year

Residence:
Kleinschönberg 34
1700 Fribourg
Switzerland

Post Office Address:
Kleinschönberg 34
1700 Fribourg
Switzerland

Citizenship:

Switzerland

Full name of nineteenth
joint inventor

Winterton, Lynn Cook

Inventor's signature

Date: _____
month/day/year

Residence:
840 Locust Grove Court
Alpharetta, Georgia 30201

Post Office Address:
840 Locust Grove Court
Alpharetta, Georgia 30201

Citizenship:

United States of America